

Digitized by



ASSOCIATION  
FOR  
PRESERVATION  
TECHNOLOGY,  
INTERNATIONAL  
[www.apti.org](http://www.apti.org)


BUILDING  
TECHNOLOGY  
HERITAGE  
LIBRARY

<https://archive.org/details/buildingtechnologyheritagelibrary>

From the collection of:

INTERNATIONAL MASONRY INSTITUTE



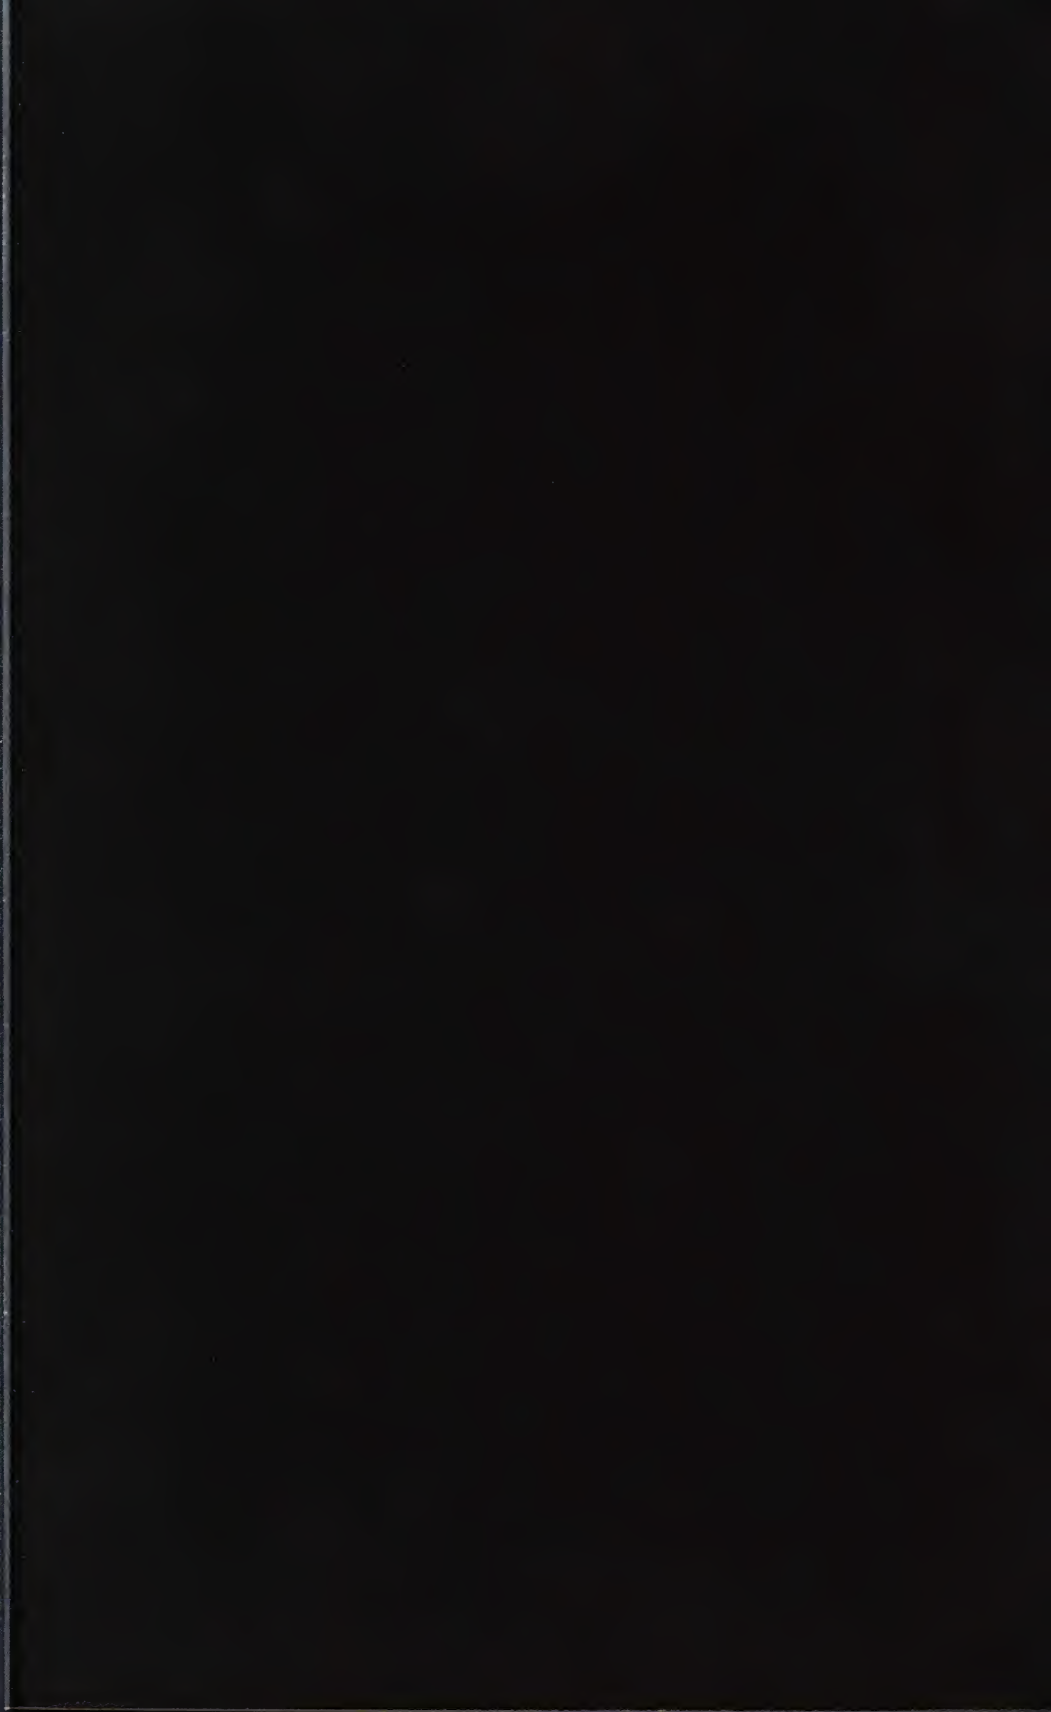





MODERN  
STONE-CUTTING AND MASONRY.

*WITH SPECIAL REFERENCE TO THE MAKING  
OF WORKING DRAWINGS.*

BY  
JOHN S. SIEBERT, C.E.,  
AND  
FREDERIC CHILD BIGGIN, B.S.,  
ARCHITECT  
*Instructor in Architecture, Lehigh University.*

*FIRST EDITION.*  
SECOND THOUSAND.

NEW YORK:  
JOHN WILEY & SONS.  
LONDON: CHAPMAN & HALL, LIMITED,  
1904.

Copyright, 1896,  
BY  
JOHN S. SIEBERT  
AND  
FREDERIC C. BIGGIN.

PRESS OF  
BRAUNWORTH & CO.  
BOOKBINDERS AND PRINTERS  
BROOKLYN, N. Y.

## PREFACE.

---

IT has long been recognized that the works on stone-cutting used in this country are entirely out of date and not abreast of the present demands.

The reasons are apparent. Those works were modelled strictly on lines set by the French school, which dealt chiefly with the heavy masonry of fortifications, and the intricate stone constructions used for the immense churches and cathedrals, built when the Church throughout Europe was in the zenith of its power. Times have changed. The heaviest masonry is no protection against modern projectiles, and steel frames veneered with stone and brick form the walls of our largest buildings. This is not the place to discuss the merits of the different styles of construction, the grace of the stone arch and the steel cantilever, or to place the beauty of a stone carving in opposition to the hard lines of iron ornament; suffice it to say that first cost is a very important factor in this country, and that, stability and usefulness being equal, the cheaper structure is generally adopted.

Intricate stonework is therefore excluded everywhere, save on very costly structures, and a treatise dealing with such work would be interesting and valuable only in so far as it presented problems to be worked by the student in search of exercise for his mental powers.

It has been the aim of the authors, in this little volume, to collect and make available for the student's use only such material as finds a direct application in engineering and architectural practice in this country. Chapter I describes the mason's and stone-cutter's tools, the shape and finish produced by these, the classification of masonry according to shape and finish, as defined by the best existing authorities, and closes with a few general remarks on bond, dressing, etc.

Chapter II deals with stone-cutting and masonry proper, and after a few preliminary definitions and descriptions takes up the study of the different examples chosen. The explanations are detailed where thought necessary, but some of the drawings are intended only as models according to which the student should make similar ones.

The skew or oblique arch is not treated here, because it is rarely used; the right arch with skew face, Plate VIII, or some other simple expedient being substituted. If it becomes necessary to build a true skew arch, the student should refer to "*Traité Pratique de la Coupe des Pierres*," by Émile Lejeune, Paris; the German works of Dr. Ringleb; and the American publications of Prof. Warren bearing on the subject.


The drawings should in all cases be made at least to a scale of one fourth inch per foot, with details three times this size; better still if both can be made double the scales mentioned, although it should be borne in mind that those first given are the ones commonly used in practice. Let the work be executed accurately, neatly, and with strong lines, remembering that nearly all office drawings are nowadays made on tracing-linen, for blue-printing, and that fancy titles are not in demand. The draughtsman who can make the plain Roman letters well has a broad foundation for all styles of lettering.

For exercises other than those given in the book the teacher should select some good existing masonry structures, have the class take full measurements of them, and then make complete drawings in accordance with the samples given in these pages. Models should always be available for the student, and the authors have in preparation a series of models illustrating various stone-cutting problems. They may be obtained direct from the undersigned.

The authors desire to acknowledge their indebtedness to Mr. Bernard R. Green, superintendent and engineer of the building for the Library of Congress; Messrs. Webster and Shaw, engineers of the Lehigh Valley Railroad; and Messrs. E. S. Wheeler and J. L. Callard, United States engineers on the Sault Ste. Marie Canal, for the valuable material furnished for use in this book.

JOHN S. SIEBERT.

SOUTH BETHLEHEM, PA.,  
Jan. 1, 1896.

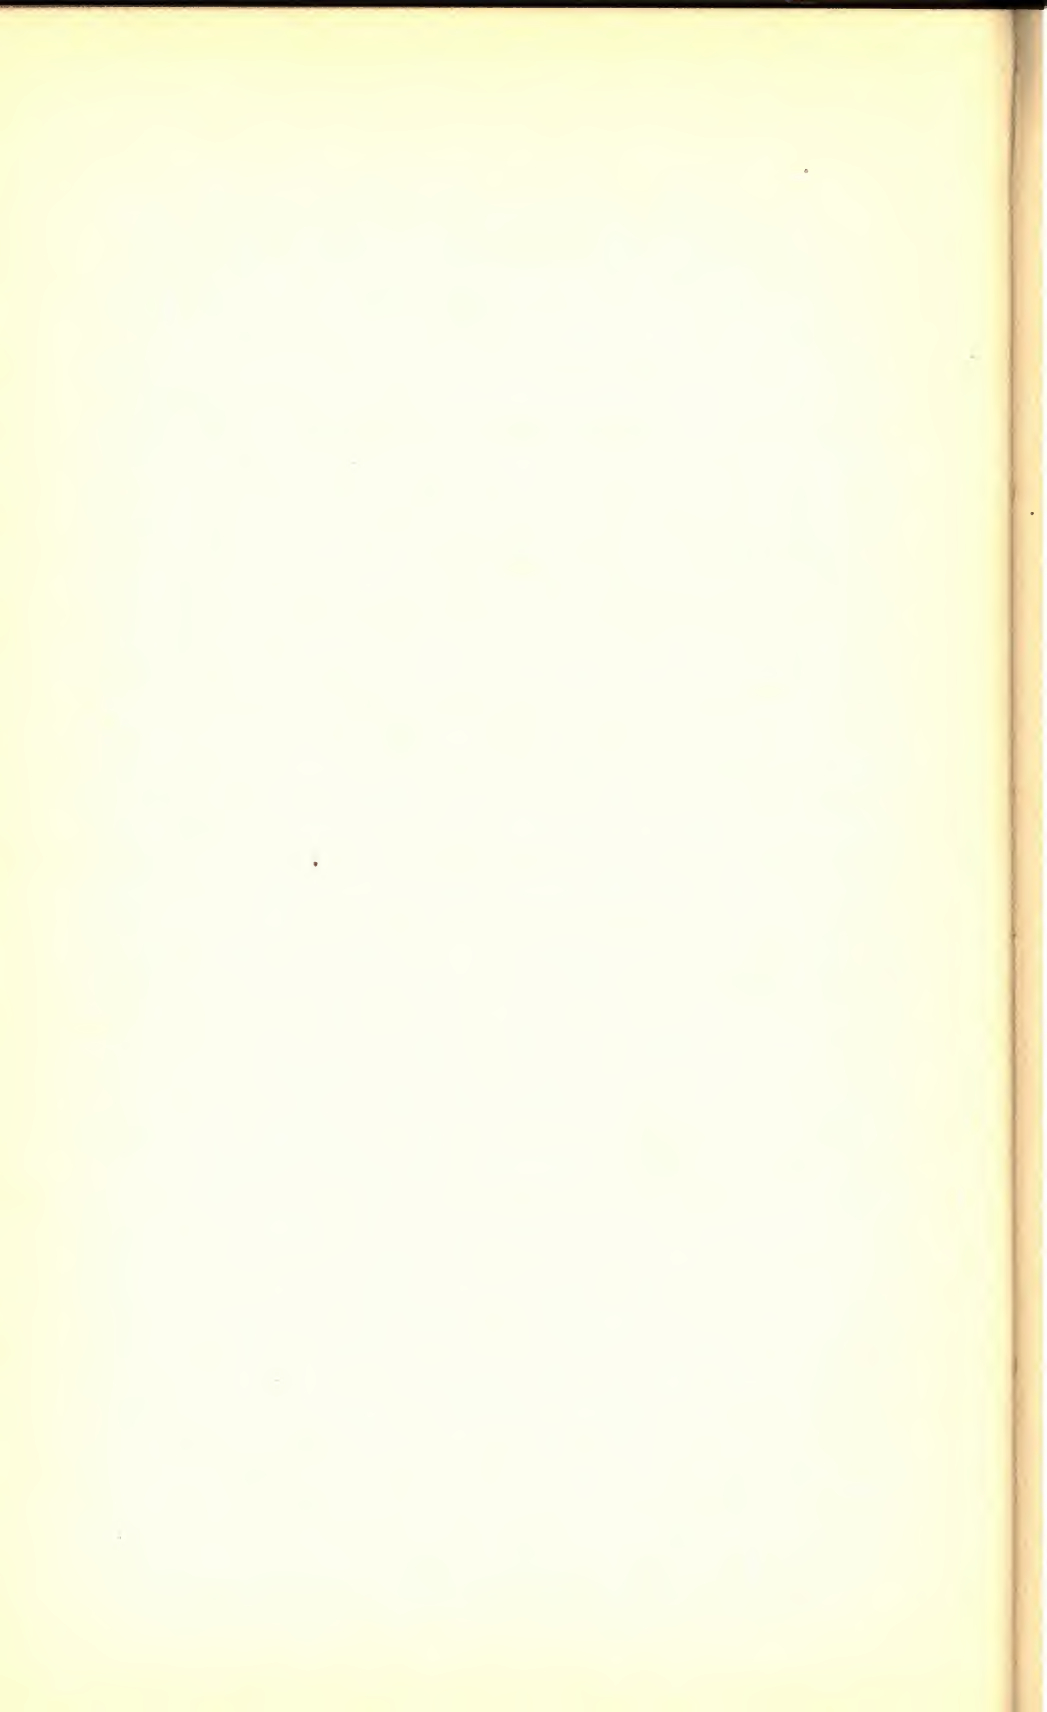



# TABLE OF CONTENTS.

## CHAPTER I.


### DEFINITIONS AND CLASSIFICATIONS.

	PAGE
Art. 1. Names and Definitions of Stone-mason's Tools . . . . .	1
Art. 2. Stones Classified according to Finish . . . . .	6
Art. 3. Definitions of Parts of the Structure . . . . .	10
Art. 4. Classification of Masonry . . . . .	12

## CHAPTER II.

### STONE-CUTTING AND MASONRY.

Art. 1. Definitions . . . . .	18
Art. 2. Gothic Buttress . . . . .	21
Art. 3. Arches . . . . .	23
Art. 4. Intersecting Arches . . . . .	32
Art. 5. Arch-culverts . . . . .	35
Art. 6. Railroad-bridge Masonry, . . . . .	41
Art. 7. Canal-lock Masonry . . . . .	44
Art. 8. Architectural Stonework . . . . .	46

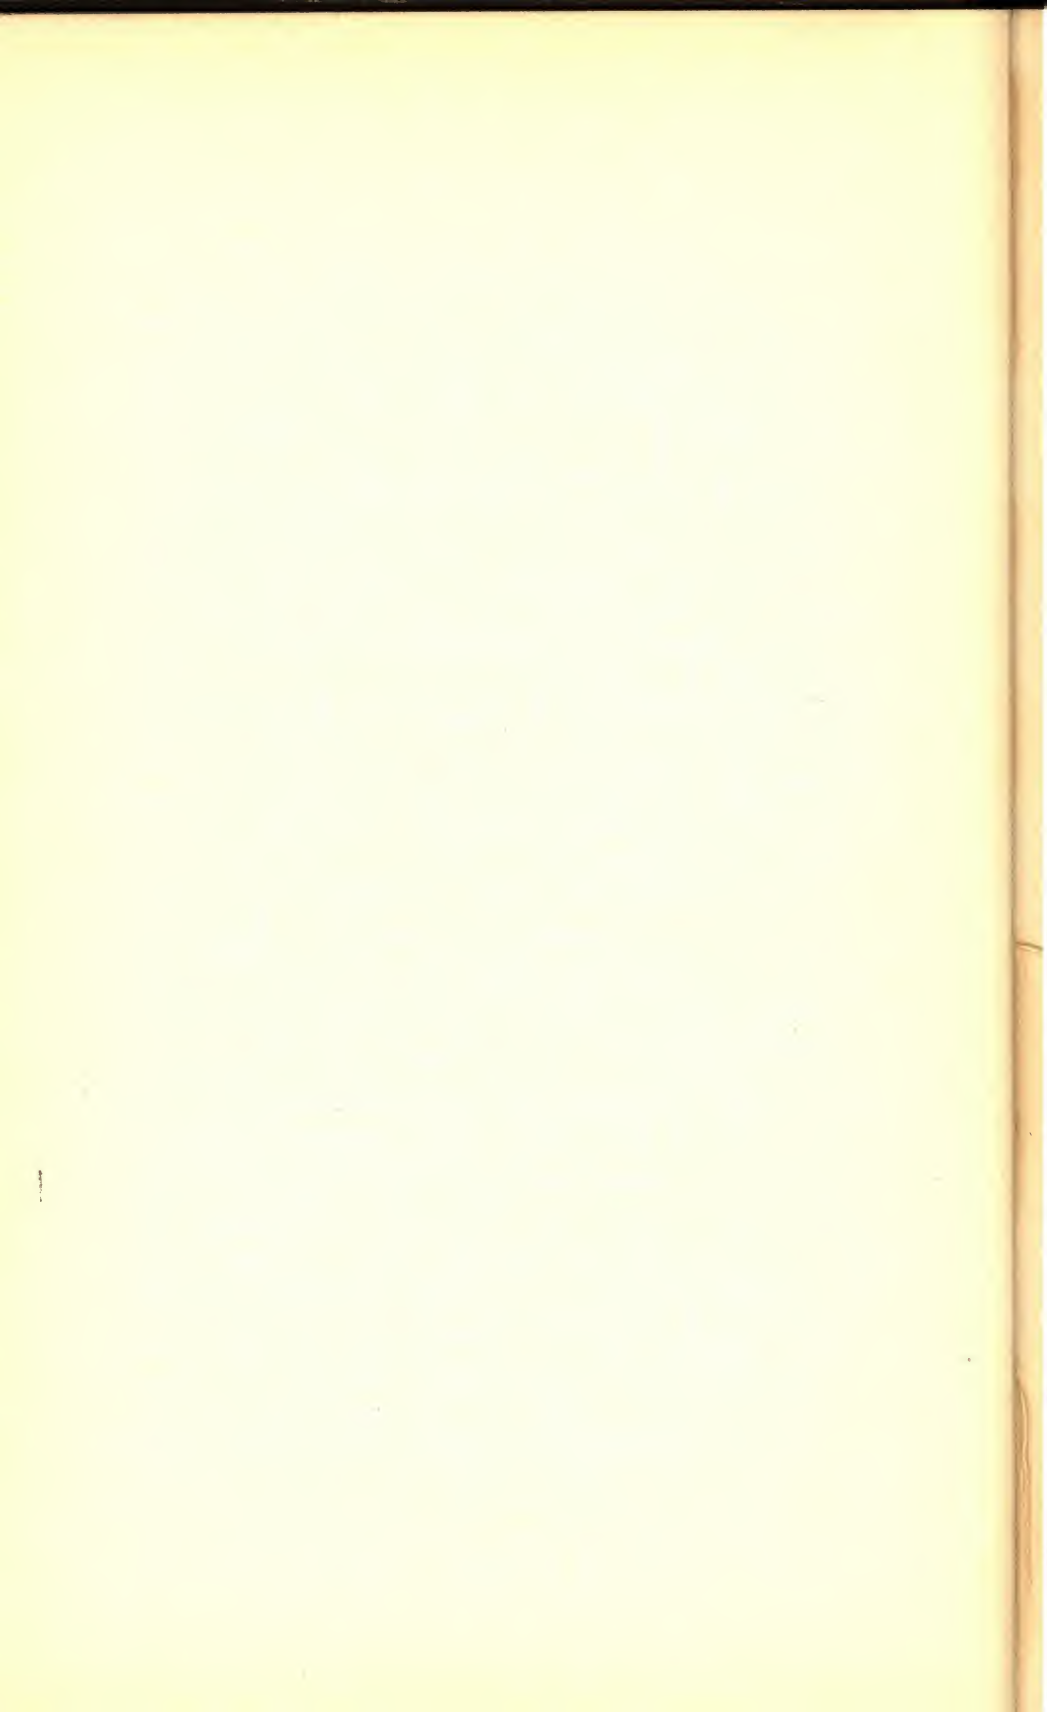



# MODERN STONE-CUTTING AND MASONRY

---

## CHAPTER I.

### DEFINITIONS AND CLASSIFICATIONS.

#### ART. I.—NAMES AND DESCRIPTIONS OF STONE-MASON'S TOOLS.

1. The following definitions of stone-mason's tools and masonry are taken from the report of the Committee of the American Society of Civil Engineers, prepared to secure uniformity of nomenclature on this subject. (See Trans. Am. Soc. C. E., vol. v. 1. pp. 297-304.)

2. The tools used at the quarry for roughly shaping the stones for transportation and also for shaping for the lower grades of masonry are (see Fig. 1): the *Double-face Hammer*, a tool weighing from 20 to 30 pounds; the *Face-hammer*, having one blunt and one cutting edge and weighing less than the double-face hammer; the *Cavil*, having one blunt and one pointed or pyramidal end and weighing from 15 to 20 pounds; the *Pick* somewhat resembles the pick used in digging, is mostly used on limestone and sandstone, and is from 15 to 24 inches long, the thickness at the eye being about 2 inches.

The tools shown in Figs. 2-6 are used for dressing proper. The *Axe* or *Pean-hammer* (Fig. 2) has two opposite cut-

ting edges. It is used for making drafts around the arris or edge of stones, and in reducing faces and sometimes joints to a level. Its length is about 10 inches and the cutting

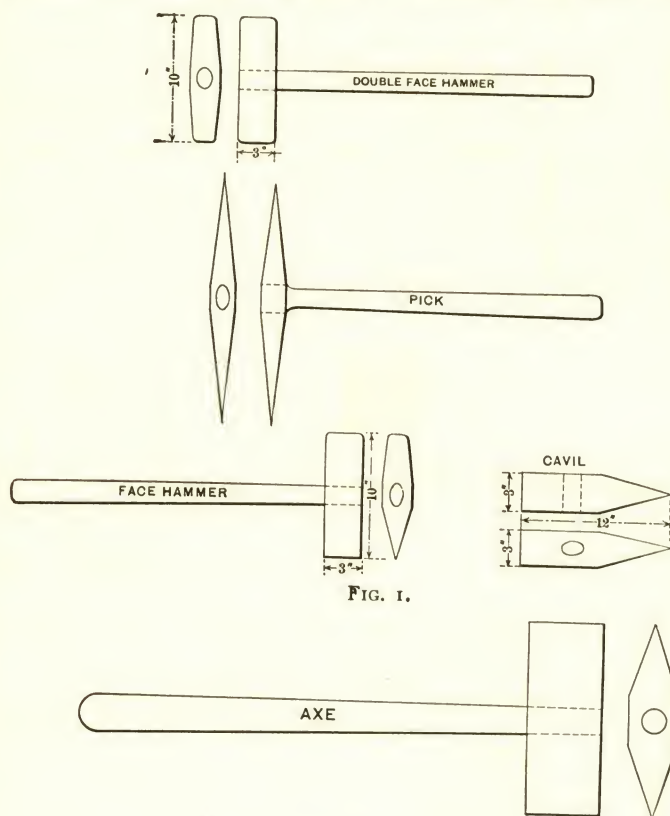


FIG. 1.

FIG. 2.

edge about 4 inches. It is used after the point and before the patent hammer.

The *Tooth-axe* (Fig. 3) is like the axe, except that its cutting edges are divided into teeth, the number of which vary with the kind of work required. This tool is not used in granite and gneiss cutting.

The *Bush-hammer* (Fig. 4) is a square prism of steel whose ends are cut into a number of pyramidal points. The

length of the hammer is from 4 to 8 inches, and the cutting face from 2 to 4 inches square. The points vary in number

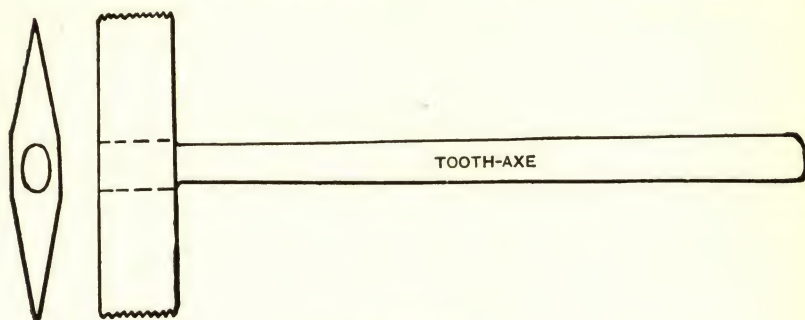


FIG. 3.

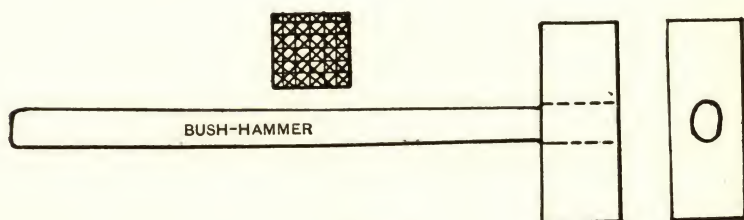


FIG. 4.

and in size with the work to be done. One end is sometimes made with a cutting edge like that of an axe.

The *Crandall* (Fig. 5) is a malleable-iron bar about 2 feet

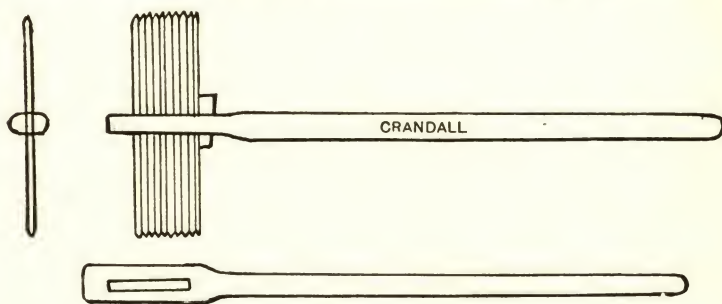


FIG. 5.

long, slightly flattened at one end. In this end is a slot, 3 inches long and  $\frac{3}{8}$  inch wide. Through this slot are passed

ten double-headed points of  $\frac{1}{4}$ -inch squared steel, 9 inches long, which are held in place by a key.

The *Patent Hammer* (Fig. 6) is a double-headed tool so formed as to hold at each end a set of wide thin chisels.




FIG. 6.

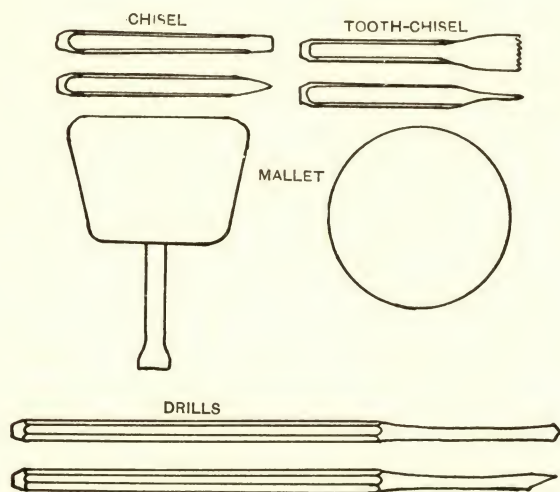



FIG. 7.

The tool is in two parts, which are held together by the bolts which hold the chisels. This tool is used for giving a finish to the surface of stones.

3. All of the above mentioned are two-handed, or require

both hands of the workman to use them. The remaining tools to be described require the use of only one hand for each.

The hand hammer and mallet are used for chiselling hard and soft stones respectively. The pitching-chisel is used to make a well-defined edge on the face of a stone, and the point for finishing a surface. The chisel and tooth-chisel are used for cutting drafts or margins on the face of stones, but the latter is used only on marbles and sandstones. The splitting-chisel and plug are used for splitting stratified and unstratified stone respectively.

In architectural carving a variety of chisels of different forms are used, for most of which no specific name exists.

For extensive operations machinery replaces many of the hand tools above described. The chief ones are the saw and

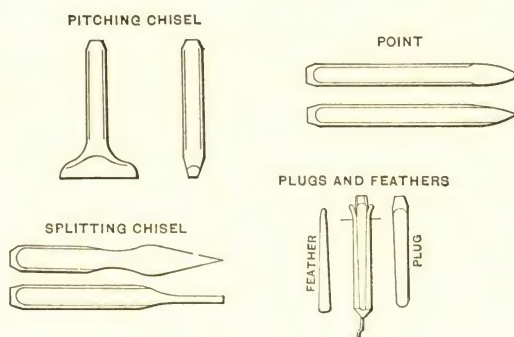


FIG. 8.

planer, the latter being a machine very similar to a metal planer. By simply changing the cutting tool a great variety of surfaces may be formed. A certain amount of hand-work, however, always remains to be done on nearly all stones.



## ART. 2.—STONES CLASSIFIED ACCORDING TO FINISH.

4. All stones used in building come under one of three classes, viz. :

I. Rough stones that are used as they come from the quarry.

II. Stones roughly squared and dressed.

III. Stones accurately squared and finely dressed.

In practice the line of separation between them is not very distinctly marked, but one class gradually merges into the next.

5. I. **Unsquared Stones or Rubble.**—This class covers all stones which are used as they come from the quarry without other preparation than the removal of very acute angles, and excessive projections from the general figure. The term “backing,” which is frequently applied to this class of stone, is inappropriate, as it properly designates material used in a certain relative position in a wall, whereas stones of this kind may be used in any position.

6. II. **Squared Stones.**—This class covers all stones that are roughly squared and roughly dressed on beds and joints. The dressing is usually done with the face hammer or the axe, or in soft stones with the tooth-axe. The distinction between this class and the third lies in the degree of closeness of the joints which is demanded. Where the dressing on the joints is such that the distance between the general planes of the surfaces of adjoining stones is one half inch or more, the stones properly belong to this class.

Three subdivisions of this class may be made, depending on the character of the face of the stone :

(a) *Quarry-faced* stones are those whose faces are left untouched as they come from the quarry.

(b) *Pitch-faced* stones are those on which the arris is clearly defined by a line beyond which the rock is cut away by the pitching-chisel, so as to give edges that are approximately true. (Fig. 20.)

(c) *Drafted* stones are those on which the face is surrounded by a chisel-draft, the space inside the draft being left rough. Ordinarily, however, this is done only on stones in which the cutting of the joints is such as to exclude them from this class.

In ordering stones of this class the specification should always state the width of the bed and end joints which are expected, and how far the surface of the face may project beyond the plane of the edge. In practice the projection varies between 1 inch and 6 inches. It should also be specified whether or not the faces are to be drafted.

**7. II. Cut Stones.**—This class covers all squared stones with smoothly dressed beds and joints. As a rule all the edges of cut stones are drafted, and between the drafts the stone is smoothly dressed. The face, however, is often left rough when the constructions are massive.

*Rough-pointed.*—When it is necessary to remove an inch or more from the face of a stone, it is done by the pick or heavy points until the projections vary from  $\frac{1}{2}$  to 1 inch. The stone is then said to be rough-pointed. This operation precedes all others in dressing limestone and granite.

*Fine-pointed.*—If a smoother finish is desired, rough-pointing is followed by fine-pointing, which is done with a fine point. It is only used where the finish made by it is to be final, and never as a preparation for final finish by another tool.

*Crandalled.*—This is only a speedy method of pointing, the effect being the same as fine-pointing, except that the

dots are more regular. The variations of level are about  $\frac{1}{8}$  inch, and the rows are made parallel. When other rows at right angles to the first are introduced, the stone is said to be cross-crandalled.




FIG. 9.

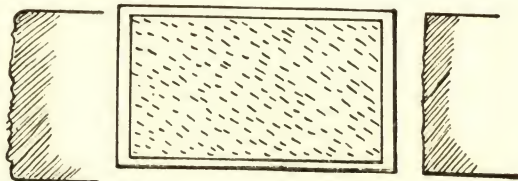


FIG. 10.

*Axed or Pean-hammered, and Patent-hammered.*—These two vary only in the degree of smoothness of the surface




FIG. 11.




FIG. 12.

which is produced. The number of blades in a patent hammer varies from 6 to 12 to the inch, and in precise specifications the number of cuts to the inch must be stated, such as 6 cut, 8 cut, 10 cut, 12 cut. The effect of axing is to cover the surface with chisel-marks which are made parallel as far as possible. Axing is a final finish.

*Tooth-axed.*—The tooth-axe is practically a number of points, and it leaves the surface of the stone in the same condition as fine-pointing. It is usually, however, only a preparation for bush-hammering, and the work is then done without regard for effect so long as the surface of the stone is sufficiently levelled.

*Bush-hammered.*—The roughnesses of a stone are pounded



off by the bush-hammer, and the stone is then said to be "bushed." This kind of finish is dangerous on sandstone, as experience has proved that sandstone thus treated is very apt to scale.

In dressing limestone which is to have a bush-hammered




FIG. 13.




FIG. 14.

finish the usual sequence of operations is: 1st, rough-pointing; 2d, tooth-axing; 3d, bush-hammering.

*Rubbed.*—In dressing sandstone and marble it is very common to give the stone a plane surface at once by the use of the stone-saw. Any roughnesses left by the saw are removed by rubbing with grit or sandstone. Such stones therefore have no margins. They are frequently used in architecture for string-courses, lintels, door-jambs, etc., and they are also well adapted for use in facing the walls of lock-chambers, and in other localities where a stone surface is liable to be rubbed by vessels or other moving bodies.

*Diamond Panels.*—Sometimes the space between the margins is sunk immediately adjoining them and then rises gradually until the four planes form an apex at the middle of the panel. Such panels are called diamond panels, and in the case described the panel is a sunk diamond panel. When the surface of the stone rises gradually from the inner lines of the margins to the middle of the panel, it is called a raised diamond panel. Both kinds of finish are common on bridge

quoins and similar work. The details of this method of dressing should be given in the specifications.

8. The student should take care not to confound the above-described three classes with what is termed first-, second-, and third-class masonry in railroad-engineering work. Extracts from specifications defining these classes are given in §§ 45, 53, 54.

### ART. 3.—DEFINITIONS OF PARTS OF THE STRUCTURE.

9. *Face*, the front surface of a wall; *back*, the inside surface.

*Facing*, the stone which forms the face or outside of the wall. *Backing*, the stone which forms the back of the wall. *Filling*, the interior of the wall.

*Batter*.—The slope of the surface of the wall. A batter of 1 inch to 1 foot, etc., means a horizontal departure of one inch from a vertical direction for each foot of altitude.

*Course*.—A horizontal layer of stone in the wall. If the stones of each layer are of equal thickness throughout, it is termed regular coursing; if the thicknesses are unequal, the term random or unequal coursing is applied.

*Joints*.—The mortar layer between the stones. The horizontal joints are called bed-joints or simply beds; the vertical joints are sometimes called the builds. Usually the horizontal joints are called beds, and the vertical ones joints.

*Coping*.—A projecting course of heavy stones (generally weathered) on the top of the wall to protect it. (A coping is weathered when it is bevelled sufficiently to throw the water away from the face of the wall.)

*Pointing*.—A better quality of mortar put in the face of the joints to help them resist the influence of the weather.

**10. Bond.**—The arrangement of stones in adjacent courses. (See Art. 5.)

*Stretcher.*—A stone whose greatest dimension lies parallel to the face of the wall.

*Header.*—A stone whose greatest dimension lies perpendicular to the face of the wall.




FIG. 15.

*Dowels.*—Pins of metal or stone which enter a hole in the upper side of one stone and also a hole in the lower side of the stone next above. They are used to prevent lateral motion between two stones. (Fig. 15.)

*Cramps.*—Metal bars having the ends turned at right angles to the body of the bar, which enter holes in the upper sides of adjacent stones. (Fig. 16.)

*Quoin.*—A corner-stone. A quoin is a header for one face, and a stretcher for the other. (Fig. 17.)

## ART. 4.—CLASSIFICATION OF MASONRY.

**II.** As the term stone masonry includes properly all classes of construction in stone which require the employment of skilled mechanics or masons, any class of masonry




FIG. 16

may be laid dry, in lime mortar or in cement mortar, at will. On this point specifications should always be precise.

**12. Rubble Masonry.**—This is composed of unsquared stones. It is divided into: *Uncoursed Rubble* (Fig. 17), laid

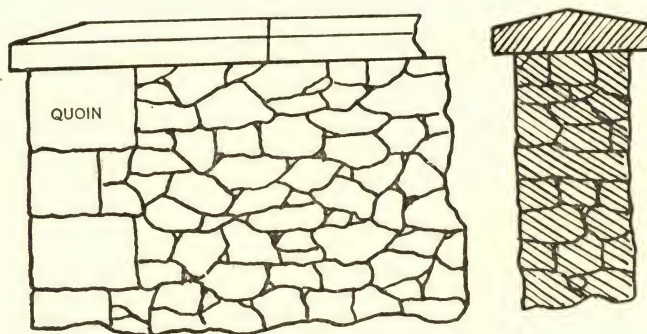


FIG. 17.

without any attempt at regular courses, and *Coursed Rubble* (Fig. 18), levelled off at specified heights to a horizontal surface. The stone may be required to be roughly shaped with



the hammer, so as to fit approximately; it is then called squared rubble.


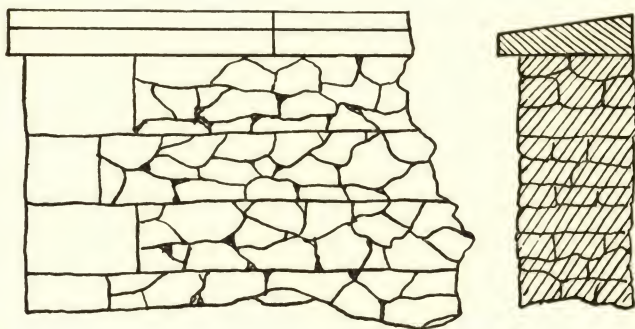


FIG. 18.

**13. Squared-stone Masonry.**—According to the character of the face, this is classified as *Quarry-faced* (Fig. 19) or as *Pitch-faced* (Fig. 20). If laid in regular courses of



FIGS. 19, 20.

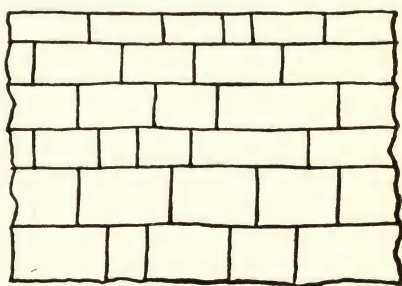


FIG. 21.

about the same rise throughout, it is *Range-work* (Fig. 21). If laid in courses that are not continuous throughout the length of the wall, it is *Broken Range-work* (Fig. 22). If not

laid in courses at all, it is *Random-work* (Fig. 23), and this is generally to be expected of this kind of masonry unless the specifications call for *Range-work*. This style of masonry is called *Block in Course* by the English. In quarry-faced and

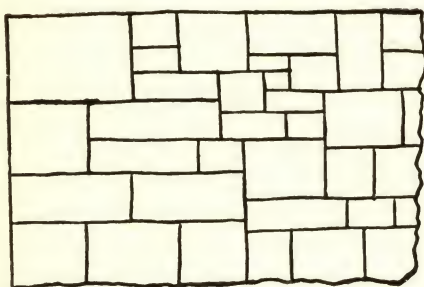


FIG. 22.

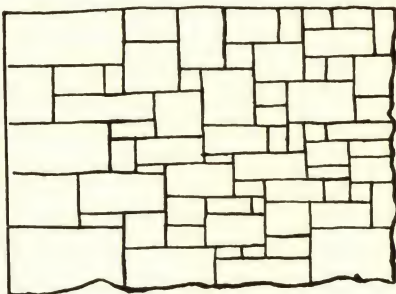


FIG. 23.

pitch-faced masonry, quoins and the sides of openings are usually hammer-dressed. This consists in removing projections so as to secure a rough-smooth surface, and is done with the face-hammer, the plain axe, or the tooth-axe. This work is a necessity where door or window frames are inserted, and it greatly improves the general effect of the wall if used wherever a corner is turned.

**14. Ashlar Masonry.**—This is equivalent to “cut-stone masonry,” or masonry composed of any of the various kinds




FIG. 24.

of cut stone mentioned above. As a rule the courses are continuous (Fig. 24), but sometimes they are broken by the introduction of smaller stones of the same kind, and then it is called *Broken Ashlar* (Fig. 25). If the stones

are less than one foot in height, the term *Small Ashlar* is proper. The term *Rough Ashlar* is sometimes given to squared-stone masonry, either “quarry-faced” or “pitch-

faced," when laid as *range-work*, but it is believed that it is more logical and more expressive to call such masonry "squared range-work." From its derivation, ashlar apparently means large square blocks, but practice seems to have made it synonymous with "cut stone," and this secondary meaning has been retained for convenience.

Dimension-stones are cut stones all of whose dimensions have been fixed in advance. If the specifications for ashlar




FIG. 25.

masonry are so written as to prescribe the dimensions to be used, it will not be necessary to make a new class of such stones.

Range-work, whether of squared stones or of ashlar, is usually backed up with rubble masonry, which in such cases is specified as Coursed Rubble.

Whatever terms are employed in common use to various classes of masonry, it is not safe to trust to them alone in preparing specifications for construction, but every specification should contain an accurate description of the character and quality of the work desired. Whenever practicable, samples of such kind of cutting and masonry should be prepared beforehand, and exhibited to the persons who propose to undertake the work.



## ART. 5.—STRENGTH OF MASONRY.

**15.** The strength of masonry will depend on the size of the blocks, the accuracy of the dressing, the bond, and the quality of the mortar.

**16. Size of Stone.**—The size of the blocks varies with the nature of the stone and quarry.

Some stones are strong enough to be used in any size, while others are limited by certain proportions of length, breadth, and thickness.

A common rule, for ordinary stone, is to make the breadth at least equal to the thickness, and seldom greater than twice this dimension, and to limit the length to within three times the thickness. When the breadth or the length is considerable in comparison with the thickness, there is danger that the block may break if any unequal settling or unequal pressure should take place. As to the absolute dimensions, the thickness is generally not less than one foot nor more than two; stones of this thickness with the relative dimensions just laid down will weigh from 1000 to 8000 lbs., allowing, on an average, 160 lbs. per cubic foot. Such a weight requires considerable effort of both men and machinery to set it in place.

**17. Accuracy of Dressing.**—Accurate dressing is essential for first-class work. If the individual blocks fit well on each other, the pressure is equalized, and cracking from this cause avoided. One of the objects of the mortar between the blocks is to equalize the pressure, and it will thus be seen that the less attention is paid to dressing the better the quality of the mortar should be. Many of the largest buildings of antiquity were erected without the use of mortar, but so well were the stones fitted together that the structures



stood until overthrown by violence. Before finally placing a block of cut stone, a trial should be made to see that it fits properly.

**18. Bond.**—In stonework of any kind it is of the utmost importance to secure a good bond.

Headers should in all cases extend into the wall two thirds of its thickness, and preferably entirely through the wall from front to back. The number of headers in a given space varies much with the class of work. *Flemish* bond, consisting of alternate headers and stretchers, presents the best appearance and is probably as strong as any other plain bond. In foundation-work there should not be less than one header for every five square feet of surface of wall.

The vertical joints of the blocks of each course alternate with the vertical joints of the courses above and below it, or *break joints* with them. The vertical joints of one course are not to be less than four inches on one side of those in the next course, and the headers should rest as nearly as possible on the middle of the stretchers in the course below. In important work the proportion of headers, limiting sizes of stones, joints, etc., are always specified.

The mean thickness of a rubble wall should not be less than one sixth of the height; in the case of a dry stone wall the thickness should never be less than two feet.

The largest stones should be used for the foundation course.

Stratified stone should be laid on its *natural bed*, i.e., so that the direction of pressure comes at right angles to the direction of the laminæ.

## CHAPTER II.

### STONE-CUTTING AND MASONRY.

#### ART. I.—DEFINITIONS.

**19.** STEREOTOMY, as applied to stone-cutting, is the art or science which teaches how to make drawings, patterns, levels, etc., by which the mason may shape blocks of stone which when fitted together form a predetermined whole.

**20.** The stone structures treated of in these limits may be divided into two general classes:

1st, those having plane surfaces only; and, 2d, those having plane and curved surfaces. The second class may be variously subdivided as structures with developable surfaces, with warped surfaces, and with surfaces of double curvature.

In engineering work structures of the first class predominate, and in architectural work those of the second. Examples of the first class may be found in retaining-walls, wing-walls, culverts, piers, canal-locks, buttresses, and fortifications; and of the second class in piers, arches, vaults, domes, towers, aqueducts, etc. Numerous engineering structures and buildings show examples of both classes. A sharp division is therefore neither necessary nor desirable, and no effort has been made in these pages to keep them separate, except in the theoretic examples.

**21.** The first operation in all stone-cutting is to form the joints of one surface, and from these all the other bounding

planes of the finished stone are derived (Fig. 26). A line is first drawn around the stone and the joints either pitched off to this line with the pitching-chisel, as in Fig. 20, or a chisel-draft is sunk all around the face until the line is reached (Fig. 27). The rough projections of the central portion are then




FIG. 26.




FIG. 27.

brought to the plane of the margin by means of chisel and crandall, and finished according to specifications.

**22. Directing-instruments.**—These are of three kinds.—*patterns, templets, and bevels*,—and must of course all be full size.

Patterns show the forms of plane or of developable surfaces, and in the latter case are made of flexible material.

Templets give the forms of required edges or other distinguishing lines of a surface. A pattern is used to lay out the *relative* position of the edges, whereas a templet defines any particular edge or edges.

Bevels show the diedral angles between surfaces. The common carpenter's square is a special form of bevel, and the straight-edge a special form of templet.

Thus in Fig. 28 patterns would give the outline of the faces marked *A*, *B*, and *C*, and a bevel or templet, or both, might be used for *D*.

**23.** It is the place of the engineer or architect to supply the stone-cutters with such drawings as will enable them to make all the necessary directing-instruments. In practical

work it is therefore not customary to make such detailed drawings as shown here for some of the simpler examples; but in order that the student may know to what extent to go

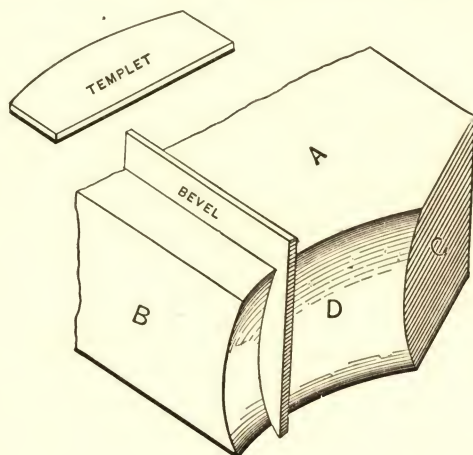


FIG. 28.


into detail he must himself know how to make these details from the drawings.

The plates, which we will now discuss, fully illustrate this point.








PLATE 1  
GOTHIC BUTTRESS

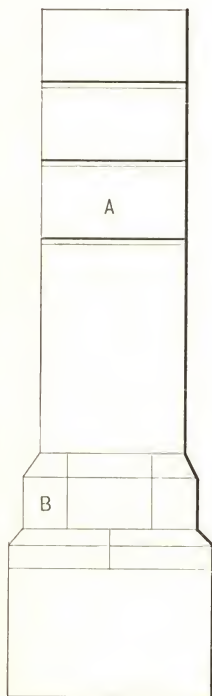



FRONT ELEVATION




SIDE ELEVATION



PATTERNS OF  
STONE AT A



PLAN AT BASE

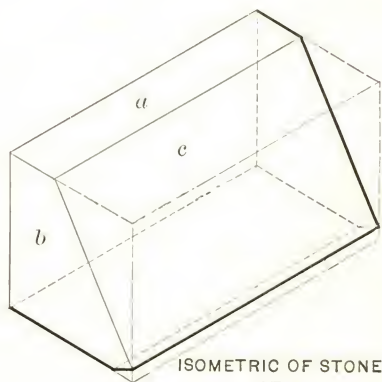

ISOMETRIC OF STONE  
AT A



PLAN AT CAP

Scale of Plans  
and Elevations

0 1 2 3 Feet

Scale of Patterns  
and  
Isometric of Stone

0 1 2 Feet

## ART. 2.—GOTHIC BUTTRESS.

## PLATE I.

24. Plate I illustrates a simple Gothic buttress, examples of which may be seen on the walls of many churches.

Since the corresponding points on the various figures bear the same letters, the student should have no difficulty in reading the drawing. For the sake of clearness a horizontal section at the base is shown, and another just below the cap. The stone *A*, of which the details are drawn, is termed a *kneeler*, and the manner in which it serves to support the coping, or cap, is evident. The details show an isometric view of the stone *A*, and patterns of the different faces. The size of the stone in the rough is indicated by the broken line on the isometric. In practice these patterns are made full size and cut out of paper, cardboard, or zinc.

25. The method of working in this case would be about as follows: Having cut the rough block of stone to a prism of nearly the desired dimensions, as explained above (§ 21), the face *a* is marked out from its pattern and brought to a plane; and the back of the stone and the two faces marked *b* worked at right angles to *a*.

The surfaces *b* are next marked, and *c* roughly cut into shape; *b* is dressed, drafts run around the edges of *c*, and its surfaces finally worked. The bottom is now easily dressed to the proper plane, and the stone is ready to hoist into place.

26. For a working drawing the details shown on this plate would be omitted, because the foreman of the masons

could readily make the patterns himself from the general drawings for such a simple case.

**27. Exercises.**—1. Draw an isometric view and the necessary patterns of the stone *B*.


2. Draw a buttress similar to the one shown on Plate I against a wall 3 ft. thick at the base, 13 ft. high, batter of face of wall 1 inch per foot, height and dimensions of base of buttress as in illustration, batter of its front 1 inch per foot and its sides  $\frac{3}{4}$  inch per foot. Slope of top and water-tables as shown. Make the necessary details for the stones similar to *A* and *B*.

3. Take the measurements and make drawings of a buttress on some building.





PLATE 2  
PERSPECTIVE OF ARCH

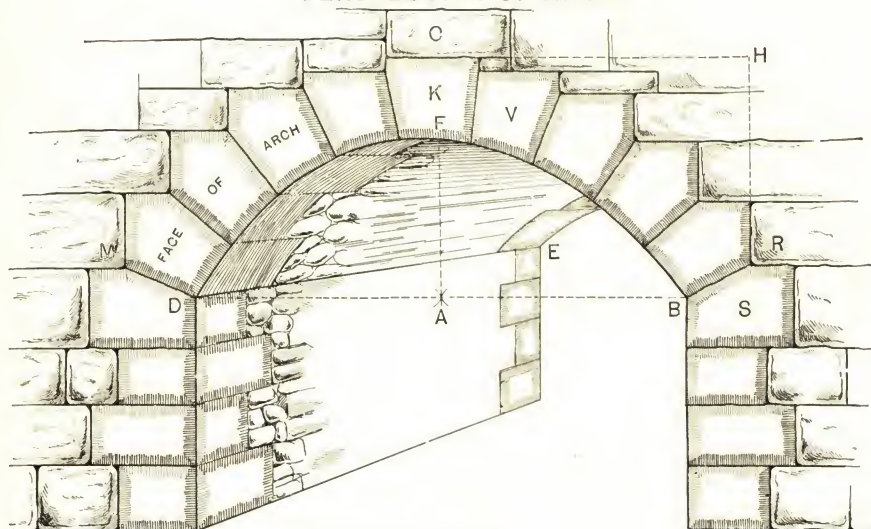

NAMES OF PARTS.

- |                                   |                |
|-----------------------------------|----------------|
| D A B=Span                        | A F=Rise       |
| D E=Springing Line                | S=Springer     |
| V=Voussoirs                       | D F B=Intrados |
| K=Central Voussoir or<br>Keystone | R H C=Spandrel |
| M C R=Extrados                    | C R=Haunch     |
| C=Crown                           | B R=Skewback   |

## ART. 3.—ARCHES.

## PLATE II.

28. This plate clearly illustrates and defines the various parts of an arch. Additional definitions are:

*Soffit* : the concave surface of the arch.

*Back* : the convex surface of the arch.

*Spandrel-filling* : the filling in the space *CHR*.

All the definitions given for one half the arch naturally apply to the other half; thus there are two haunches, two skew-backs, etc.

*String-course* : a course running the length of the arch, parallel to *DE* in a right arch.


*Ring-course* : a course parallel to the face of the arch.

*Coursing-joint* : a joint between adjoining string-courses. Also called *Bed-joint*.

*Heading-joint* : a joint between adjoining ring-courses.

*Arch-sheeting* : all of the arch masonry of the arch proper, except the face-voussoirs.

The face of the arch is also called *The Head*, and the face-voussoirs *Ring-stones*.

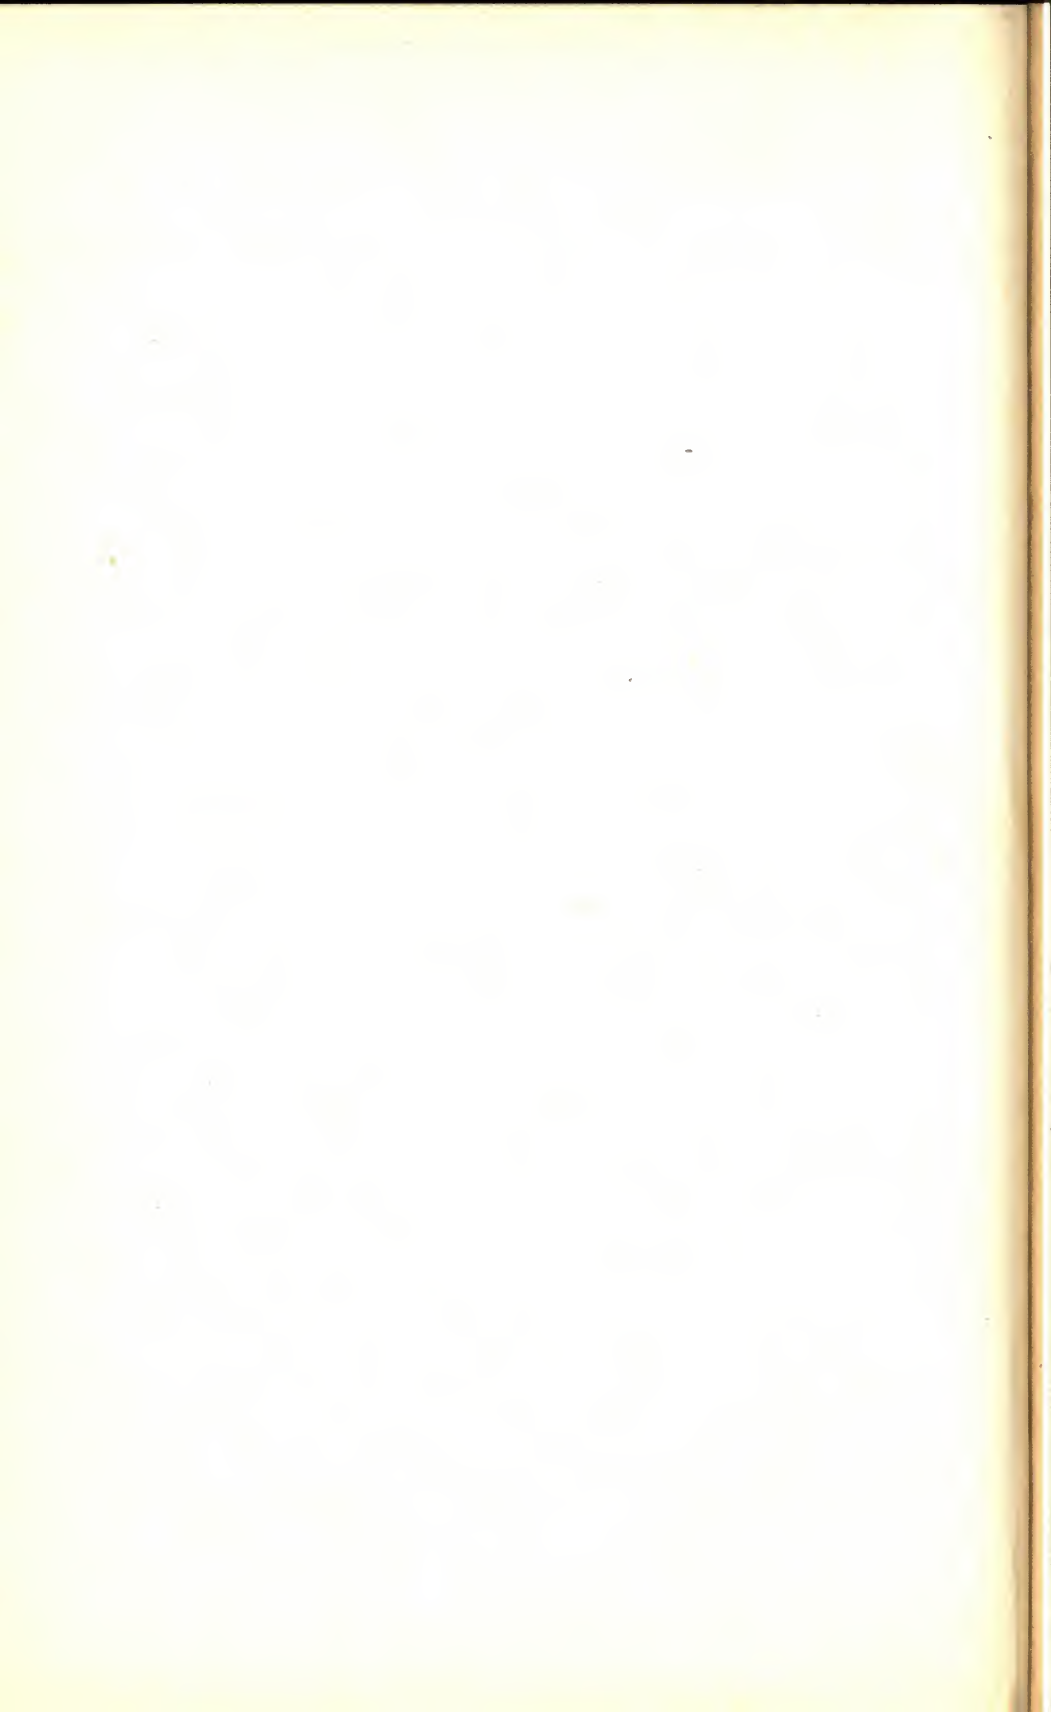

if it be desired to make a determinate solution. (See Wheeler's "Civil Engineering," p. 258.)

31. The four-centred Tudor arch (Fig. 5) may be constructed as follows: Divide the span  $AD$  into four equal parts,  $AB$ ,  $BC$ , etc. From  $B$  and  $C$  as centres, with radius equal to  $BC$ , describe arcs intersecting in  $F$ . Draw  $BF$  and extend it to meet a perpendicular to  $AD$  through  $C$ . With  $B$  as centre and radius  $AB$  describe  $AK$ , and with  $H$  as centre and radius  $HK$  describe  $KE$ . Similarly for the other half of the arch.

The segmental arch (Fig. 6), such as is used to span openings over doors and windows, is constructed on the equilateral triangle  $ABC$ , having a side equal to the span.






## PLATE IV.

**32. The Recessed Flat Arch, or Plate-band.**—This form of arch is used where it is desirable to have the top of the opening present a flat surface. The bearing power of this construction is small, and any considerable weight above it is borne by a *relieving-arch* or a beam. The lintels over the doors and windows of a brick building are simple examples. This arch should not be used for spans exceeding ten feet.

Having given the necessary dimensions, the front elevation and top view are drawn. A top view is shown in place of the usual plan in order to bring out the joints of the arch. Thus the line  $f-g$  shows a joint on the back of the arch;  $h-i$  on the elevation corresponds to  $h-i$  on the top view. There being a shoulder at  $i$  which does not appear on the elevation, and the line  $i-l$  being in a vertical plane, the points cannot be lettered alike without tending to confuse. The student should draw a vertical section through the keystone, which will materially aid him to a better understanding of the structure.



The isometric of the stone  $A$  may be drawn as follows: From any convenient point, as  $O$ , draw the usual co-ordinate axes,  $O-a$ ,  $O-2$ , and  $O-13$ . Lay off  $O-2$  equal to the width of the stone, equal to  $12-2$  on the elevation. Draw the front of the stone, all of whose lines except  $4-5$  show in their true size, and may therefore be taken from the elevation. Lay off  $1-14$  and  $14-15$ , equal to  $1-14$  and  $14-8$  respectively on the top view, and draw  $1-15$ .  $15-16 = 8-9$ ,  $16-12 = 15-12$ , and  $12-13 = 10-13$ . As a check  $O-13$  should equal  $n-O$ .

PLATE 4  
RECESSED FLAT ARCH

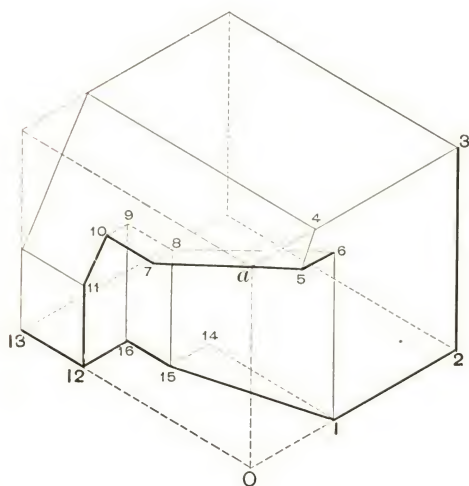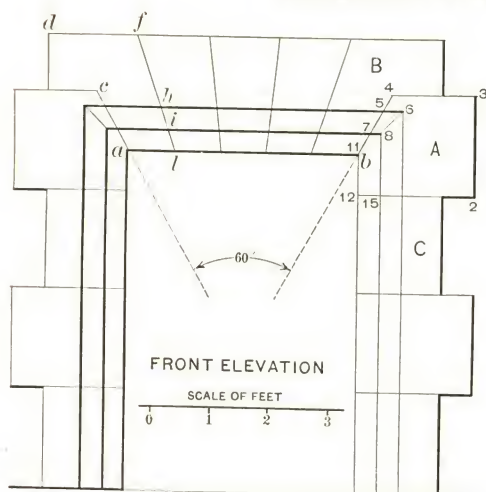


PATTERNS FOR  
JOINT A-B

SCALE OF FEET




PATTERNS FOR  
JOINT A-C


SCALE OF FEET



ISOMETRIC OF  
STONE AT A

SCALE OF FEET



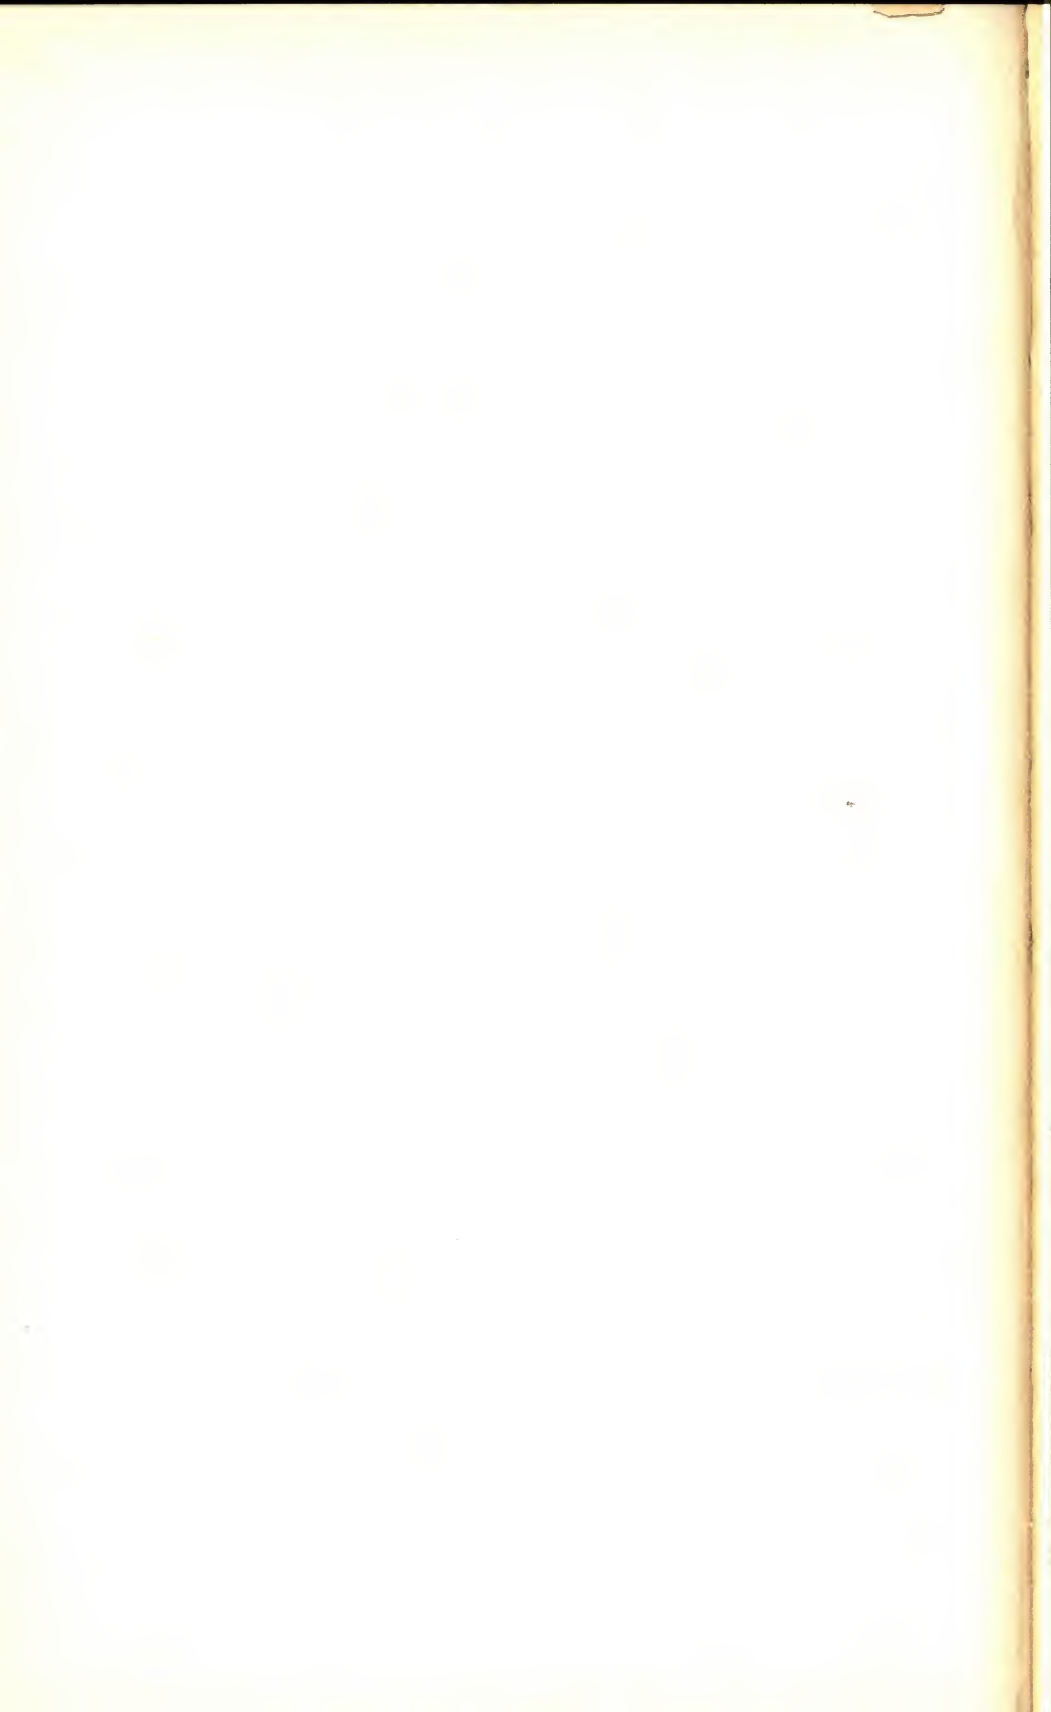

From the points 13, 12, 16, and 15 draw the verticals as taken from the elevation, and the drawing is readily completed. The patterns, being numbered to correspond to the numbering on the other figures, need no further explanation.

**33. Exercises on Plate IV.**—1. Draw a vertical section through the keystone.

2. Draw an isometric of, and all necessary patterns for, the keystone and the stone *B*.

3. Draw a recessed circular or pointed arched gateway of dimensions similar to the flat one shown; adding three or four stone steps to the front.

## PLATE V.

**34. Arches in Circular Walls.**—An arch in a circular wall is a construction sometimes met in architectural and in engineering work.

It is generally avoided, owing to the difficulty of constructing it, and the not pleasing effect of the finished structure. There are instances, however, when it is necessary to use it, and an explanation of a simple case is inserted here. For the more complex cases the student is referred to Émile Lejeune's "*Traité Pratique de la Coupe des Pierres.*"


**35.** Almost any form of arch may be constructed in a circular wall. Two general divisions may be noted—the cylindrical arch, and the radiant arch. The first is the ordinary arch with cylindrical intrados and extrados, whereas in the second the elements of intrados and extrados radiate from a common vertical axis. The elements are, however, in every case parallel to the springing-plane—a point which should be carefully noted, and which will readily appear from an inspection of Plate III. The outer and inner openings of the cylindrical arch are the same in size, but in the radiant arch the inner opening is smaller.

**36.** A cylindrical arch in a circular wall may be considered as a case of two cylinders intersecting at right angles, the axis of the one being vertical and that of the other horizontal. We will explain how to obtain all the necessary patterns, bevels, etc., have given plan, elevation, etc., of the arch.

**37.** Fig. 1 shows the elevation of a cylindrical circular arch and a portion of the circular wall containing it. The plan





PLATE 5  
CYLINDRICAL ARCH  
IN A  
CIRCULAR WALL

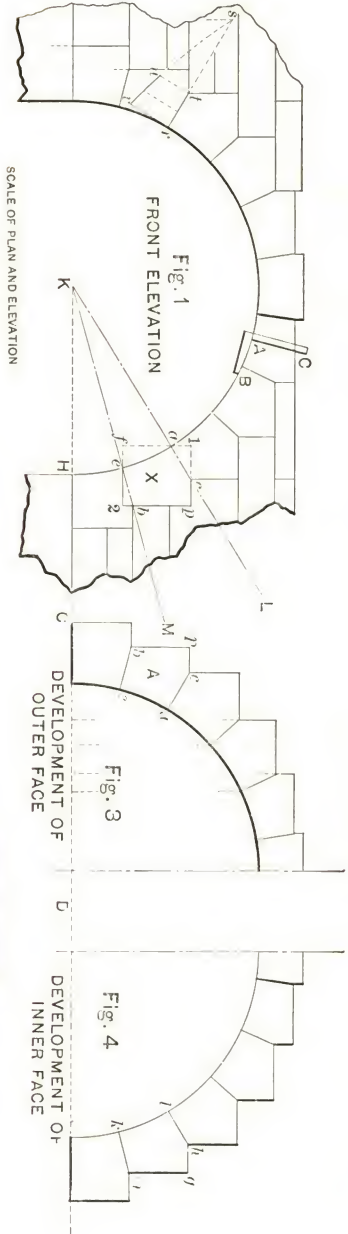

SCALE OF PLAN AND ELEVATION  
0 1 2 3 4 5 6 Feet

SCALE OF DEVELOPMENTS  
0 1 2 3 4 5 6 Feet

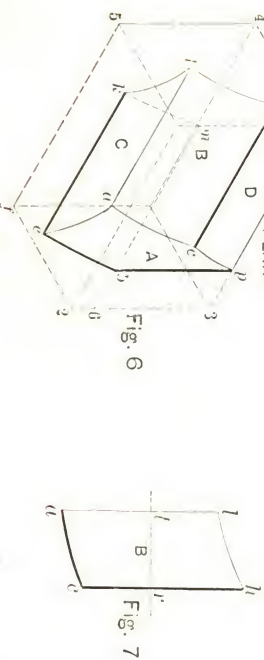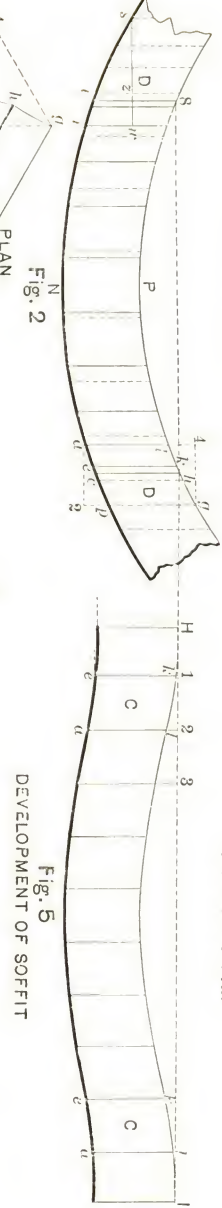



shows the joints as though the soffit were viewed from below, which is done to show its joints more plainly. Let us take some one stone, as *X*, and show how to derive all the patterns necessary to work its faces.

Draw first an isometric view, as Fig. 6, in order to obtain a better conception of its appearance. Briefly, this may be constructed thus: Around the elevation and plan of *X* draw rectangles showing the limits of the rough stone from which to work the finished block. Draw an isometric block with these dimensions, as *f-1-3-2*, etc., and on this plot the corners of the stone—remembering that three such co-ordinates are necessary to locate a point not in an isometric plane. Thus the point *b* requires the co-ordinates *f-2* and *2-b* from Fig. 1 and *2-p* from Fig. 2; which are laid off as *f-2*, *2-6*, and *6-b* respectively in Fig. 6.

The face *A*, having the curve of the wall as shown by the lines *c-p* and *c-p*, Fig. 2, must be developed to show its true size. The developments of one half the outer and one half the inner faces is shown in Figs. 3 and 4. Set off along the line *C-D*, Fig. 3, the outer curve of the wall, by points from Fig. 2; erect ordinates at these points and project the proper heights over from Fig. 1. (See Descriptive Geometry for development of cylinder.) The pattern is now shown in its true size at *b-c-a-c-p*, Fig. 3. The corresponding one for the inner face is found on Fig. 4.

The pattern for *B* requires us to find the true size and appearance of the radial joints *a-c* and *c-b*. These joints are formed by the intersection of the planes *K-L*, *K-M*, etc., perpendicular to the vertical plane of projection, with the vertical cylinder or portion of cylinder forming the wall. They are therefore arcs of ellipses, and may be shown in their true size by revolving parallel to one of the planes of projec-

tion or constructing the ellipse, having given its axes. The former method is shown here, and for clearness the corresponding stone on the left of the arch is taken. The chord  $s-r$ , Fig. 1, is used as an axis. When the ellipse is revolved into  $V$ , the point  $s$  remains stationary, being where the axis intersects the arc;  $r$  falls at  $v$ , a distance equal to  $wr$ ,  $t$  at  $u$ , and other points similarly.  $u-v$  shows the arc we want, and Fig. 7 gives the construction of the pattern—the lines  $c-h$  and  $a-l$  being obtained from Fig. 2.

To construct the pattern for  $C$  we must develop the under surface or soffit of the arch. If the arch were in a straight wall, its development would of course be simply a rectangular band equal in length to the semicircumference of the circle of radius  $K-a$  and in width to the thickness  $N-P$ . But owing to the circular shape of the wall the development departs from this rectangular form, as will be shown if a chord be drawn from  $h$  to  $g$ , Fig. 2. To develop, then, lay off, by points, on the indefinite line  $H-I$ , Fig. 5, the length of the arch from Fig. 1, as  $H-1$ ,  $1-2$ , etc., equal to  $H-c$ ,  $c-a$ , etc., respectively, in Fig. 1; draw perpendiculars at these points, and project the points  $k$ ,  $l$ , etc., over from Fig. 2. Through the points thus found draw the curve of the developed intrados.  $C$  shows the desired pattern.  $D$  is shown in its true size in Fig. 2.

38. At  $CAB$ , Fig. 1, is shown an arch square. It is a bevel, the arm  $AC$  of which radiates from the centre of the arch, and the arm  $AB$  is curved to the curve of the intrados, as shown on the elevation.

39. The stone  $X$  may now be worked as follows: The face  $bpgm$ , Fig. 6, is rectangular, and needs no further explanation. The face  $D$  at right angles to this one is also readily worked, its pattern being shown on Fig. 2. A bevel, having the

angle  $acp$ , Fig. 1, is made, and the face  $B$  worked by means of it and the pattern, Fig. 7. The soffit  $C$  is now worked by means of the arch square and the pattern  $ealk$ , Fig. 5, this pattern being made of zinc, and bent to the proper curve on the arch square. The development  $A$ , Fig. 3, bent to the curve  $ap$ , Fig. 2, will give the pattern of  $A$ , Fig. 6, and therefore a templet for  $cb$ . A draft  $cb$  having been sunk, the face  $A$  is readily worked. The other faces are obtained similarly.

**40. Exercises.**—1. Draw an isometric and construct all necessary patterns and bevels for the keystone.

2. Replace the arch in the illustration by a three-centred one and make the drawings.

3. Make the drawings when the face of the arch is moulded.



## ART. 4.—INTERSECTING ARCHES.

## PLATE VI.

41. We will now deal briefly with the surfaces formed by the intersection of two arches.

Whenever two intersecting surfaces of the second degree (ellipse, hyperbola, parabola) have one diameter in common, their intersections lie in planes, and are consequently projected on the plane of the axes as straight lines. Two cylindrical arches having each the same rise (the spans may or may not be equal) will intersect in ellipses, and this is true whether the intersection be right or oblique. The curves thus formed by the intersection of two vaults are called groins, or groin curves.





Two general divisions of intersecting arches may be noted, forming, 1st, *The Cloistered Vault*, and, 2d, *The Groined Vault*.

The cloistered vault (Figs. 4 and 5) is formed when the arches *meet* to form a covering for a closed area, making a vaulted ceiling for a room. The groins in this case form valleys between the vaulting surfaces. The effect may be seen in any room which has a coved ceiling, i.e., one in which the walls and ceiling are connected by a curve instead of a right angle.

The groined vault (Figs. 1, 2, and 3) is formed when the arches *cross* each other, forming the vaulted passage called cross-vault (German *Kreuzgang*). Fig. 1 shows plainly how the groin curves, as *fbg*, are formed by the intersection of the

PLATE 6  
GROINED  
AND  
CLOISTERED VAULTS

SCALE OF FEET  
0 1 2 3 4 5 6 7 8 9 10

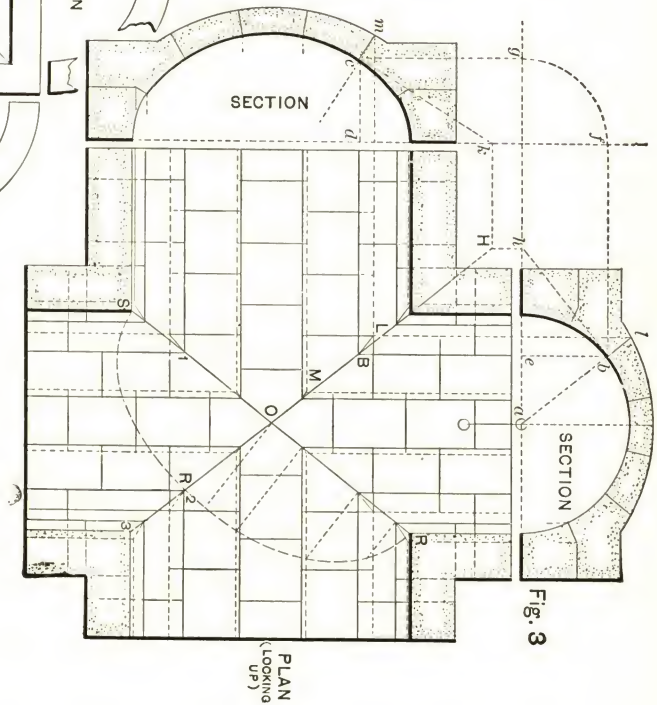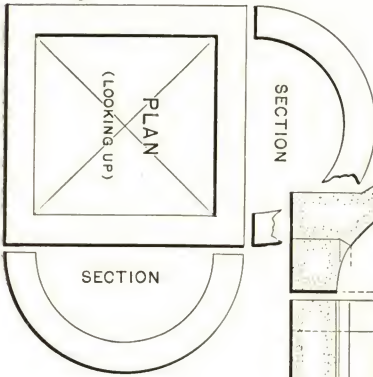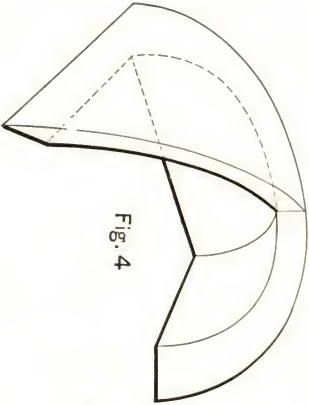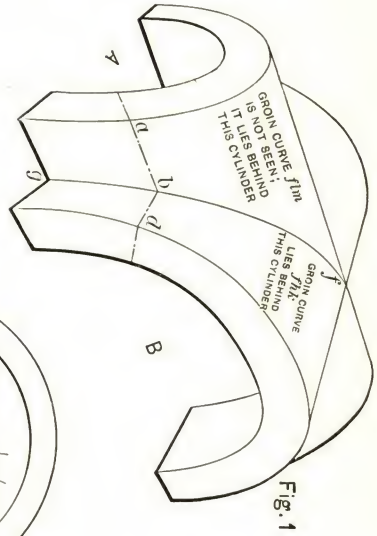



different elements,  $ab$ ,  $db$ , etc. It will be seen that the groins in this case project into the passage—just the opposite from the cloistered groin. If in Fig. 1 the elements of the cylinder  $A$  lay between the groins  $fbg$  and  $fhk$  and the corresponding ones to the left, and the elements of the cylinder  $B$  lay between the groins  $fbg$  and  $flm$  and the corresponding ones to the rear, the passageway would be closed and the groined vault would become a cloistered vault.

Fig. 2 shows a groined vault from below.

**42. The Right Groined Vault.**—Referring now to Fig. 3, let the two vaults be given as in the plan, intersecting at right angles. The joint lines of the intrados are, as in Plate V, shown as full lines, because they are of more importance than those of the extrados, which latter is frequently left unfinished. Let the right section of the one vault be a circle of radius  $a-b$ , radius of extrados being equal to depth of keystone plus  $\frac{3}{4}$  diameter of arch. This increase of radius gives a proper thickness towards the springing of the arches. Now let us impose the conditions that corresponding points on the two arches be the same height above the springing-plane, and that all bed-joints be normal to the soffits. The joints of the circular arch—call it No. 1—will of course radiate towards the centre  $a$  of the intrados, while those of the other arch, No. 2, will be determined as follows:

First, to find the curve of the intrados of No. 2. Project the point  $b$  of No. 1 on the groin, in  $B$ ; from  $B$  draw  $Bc$  parallel to the axis of No. 2, and lay off  $dc$  equal to  $eb$ ; or project the point as shown by the dotted construction  $bfgc$ . Sufficient points having been thus found, the ellipse is readily drawn.

To draw the joints normal to the intrados we must first draw tangents at the points just determined. Draw a tangent

*bh* in No. 1 and project it on the groin as *BH*; draw *HK* parallel to the axis of No. 2, and join *k* and *c* for the new tangent. The normal is, of course, drawn perpendicular to this tangent, and the point *m* fixed by laying off its height above the springing-plane, as shown by *l* in No. 1. The reason for this construction will be evident if the student remember that the tangent to the intersection of two surfaces lies in the intersection of the tangent planes.

*PRS* shows the groin revolved into *H*, about *POS* as an axis.

Joining the points *LMO*, etc., gives the groin of the extrados.

**43. Exercises.**—1. Isometric and patterns of keystone and a springing-stone.

2. Two vaults of unequal spans uniting at an angle of  $60^{\circ}$ .

3. Details for 2.

4. Let vault No. 1 stop on the line *S-3* and No. 2 on the line *P-3*.






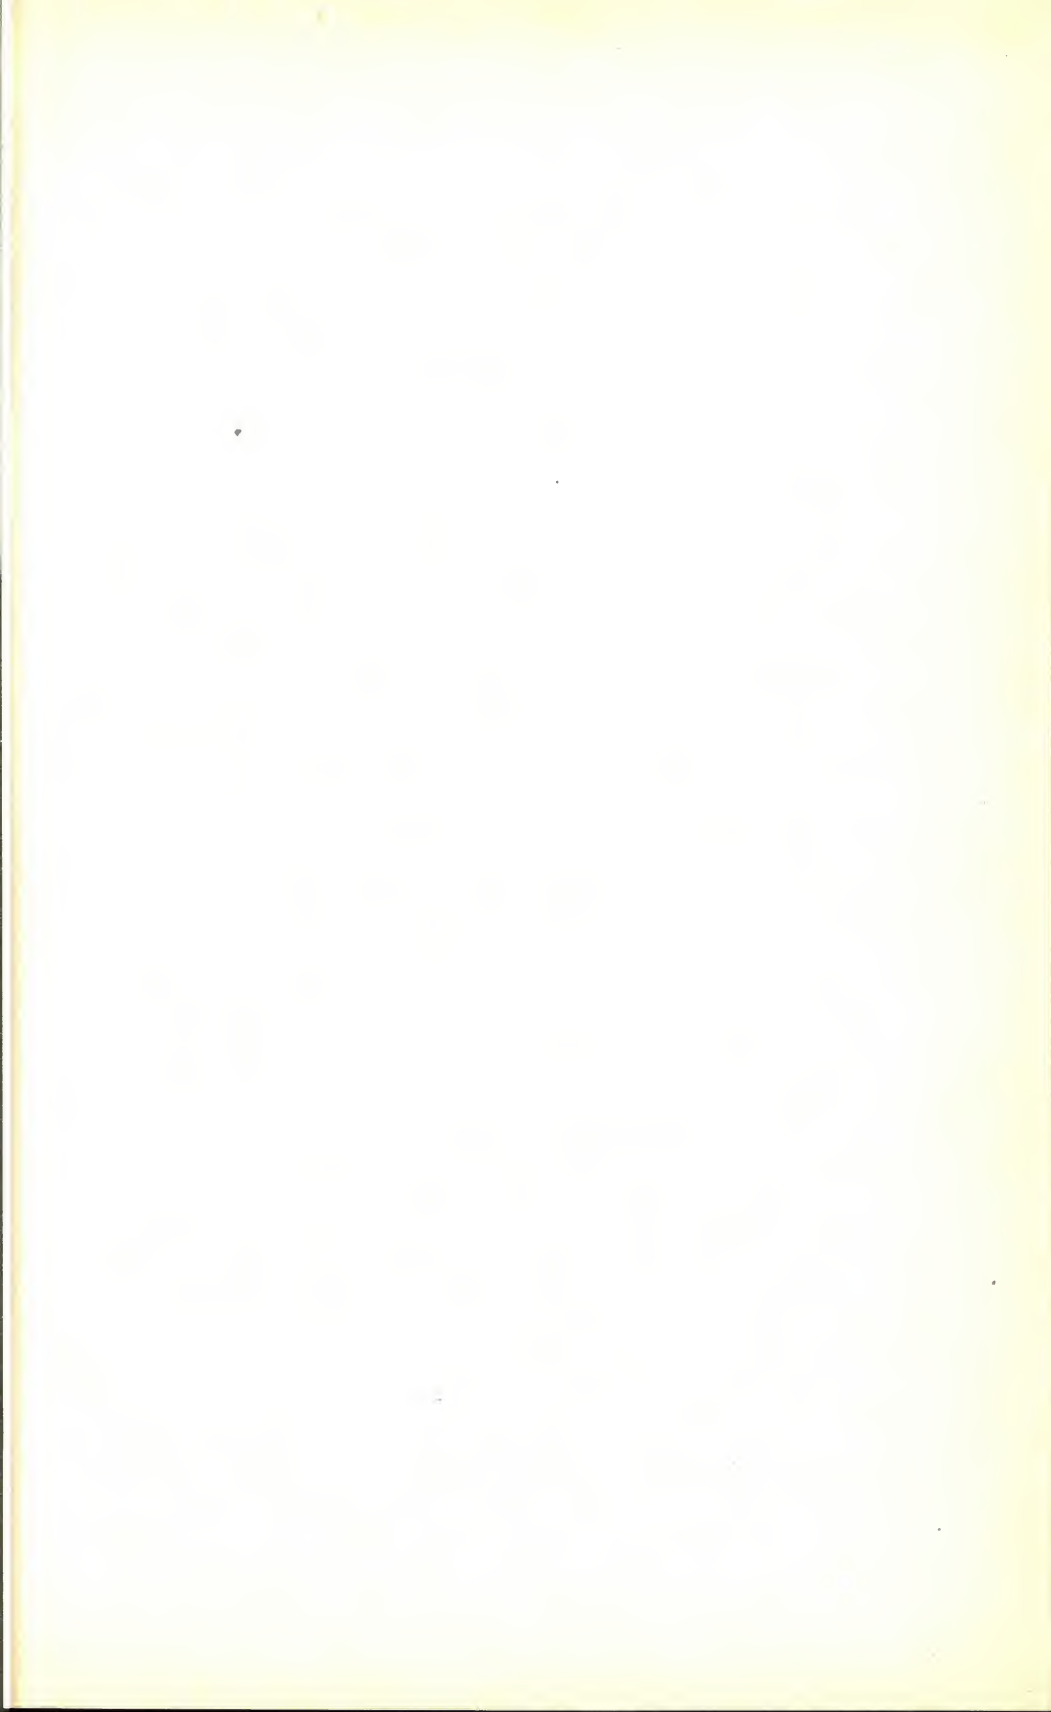


PLATE 7  
6 FOOT ARCH CULVERT  
AUBURN & ITHACA R.R.  
3RD CLASS MASONRY

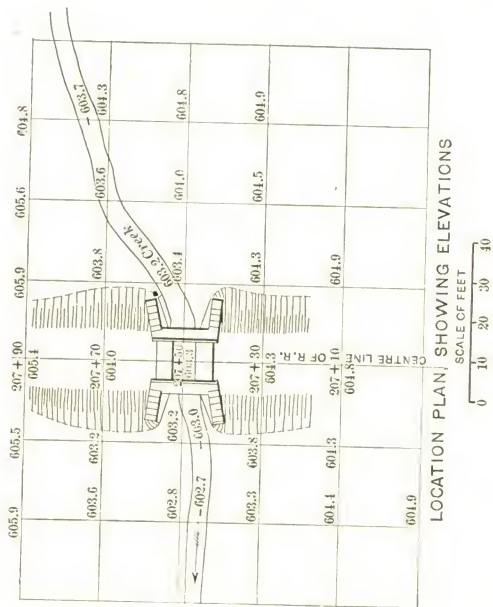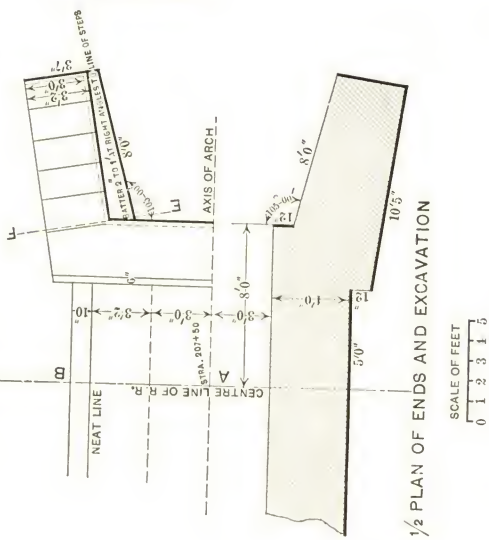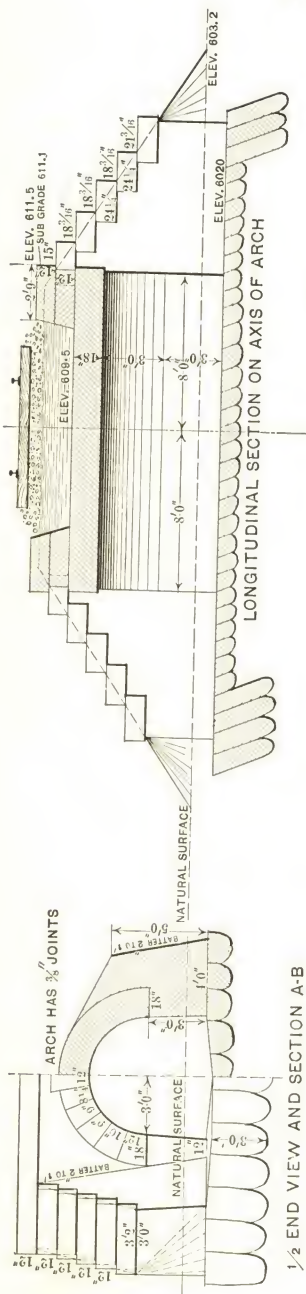

## ART. 5.—ARCH-CULVERTS.

PLATE VII.—6-FT. ARCH-CULVERT, AUBURN & ITHACA  
R. R.

44. Complete working drawings are shown on this plate of a small culvert built of rough masonry.

45. Third-class masonry, as used on this road, is specified as being rubble-work (§ 12), laid with mortar in irregular courses, and will consist of stone containing generally six cubic feet each, so disposed as to make a firm and compact work; and no stone in the work shall contain less than three cubic feet, except for filling up the interstices between the large blocks in the heart of the wall. At least one fifth of the face shall be composed of headers extending full size four feet into the wall, and from the back the same proportion and of the same dimensions, so arranged that a header in the back shall be between two headers in the face. The corner-stones shall be neatly hammer-dressed, so as to have horizontal beds and vertical joints. Also, drafts to be cut on all covers of masonry.

46. The stones for the faces of the arch, coping, etc., are fully figured, and the mason is therefore able to cut them without further detailed drawings.

The method adopted on this plate of showing one half views is done only to economize space. It is not recommended for working drawings of this class. The little extra time required to make the complete drawing is more than

balanced by the time saved during construction in avoiding numberless questions and the probability of making corrections on work done.

This drawing is so well figured and lettered throughout that the student needs only to study it carefully in order to fully understand it.





## SCALE OF FEET



## PLATE VIII.—12-FT. ARCH ON THE AUBURN &amp; ITHACA R. R.

47. This is a good illustration of a case where the railroad does not cross the stream at right angles. To save building a larger structure than necessary recourse is had to a skew-face arch, i.e., one in which the axis is oblique to the plane of the faces. Fig. 28 illustrates this, the dotted lines showing where the faces of a plain right arch giving the same width of roadway as the skew-face arch would come.




FIG. 28.

The extra haunching shown on the various figures is to strengthen the arch, and the planking, held by heavy sheet piling at the ends, serves to prevent the stream from scouring under the arch. The wing-walls are built with an even batter on the inside faces, while for the outside faces and back of the parapet-walls the same effect is obtained by building steps. This is plainly shown on the right wing-wall of the end elevation.

The right section *CD* shows the dimensions of the abutment-walls and the increased depth of the sheeting towards the springing.

The student should note that, although the end elevation shows the arch as a semicircle, it is really a semiellipse with diameters equal to 13 feet and 12 feet respectively.


Stones such as *a* on section *AB* and on longitudinal

section and in other places are not filled in with cross-section lines, because it is desired to bring the cut-stone work into prominence. The general arrangement of the drawings on this plate is very good, the draughtsman being enabled to readily project from plan to elevation, sections, etc.

48. In passing it may be well to note the difference existing between the term plan as used by the engineer and by the architect. The first uses it in the strictly correct sense, i.e., horizontal projection, while with the second it generally means a horizontal section at some point; thus the plan on this plate would be an architect's top view.



PLATE 9  
 DETAILS OF 12 FOOT ARCH  
 ON THE  
 AUBURN & ITHACA R. R.

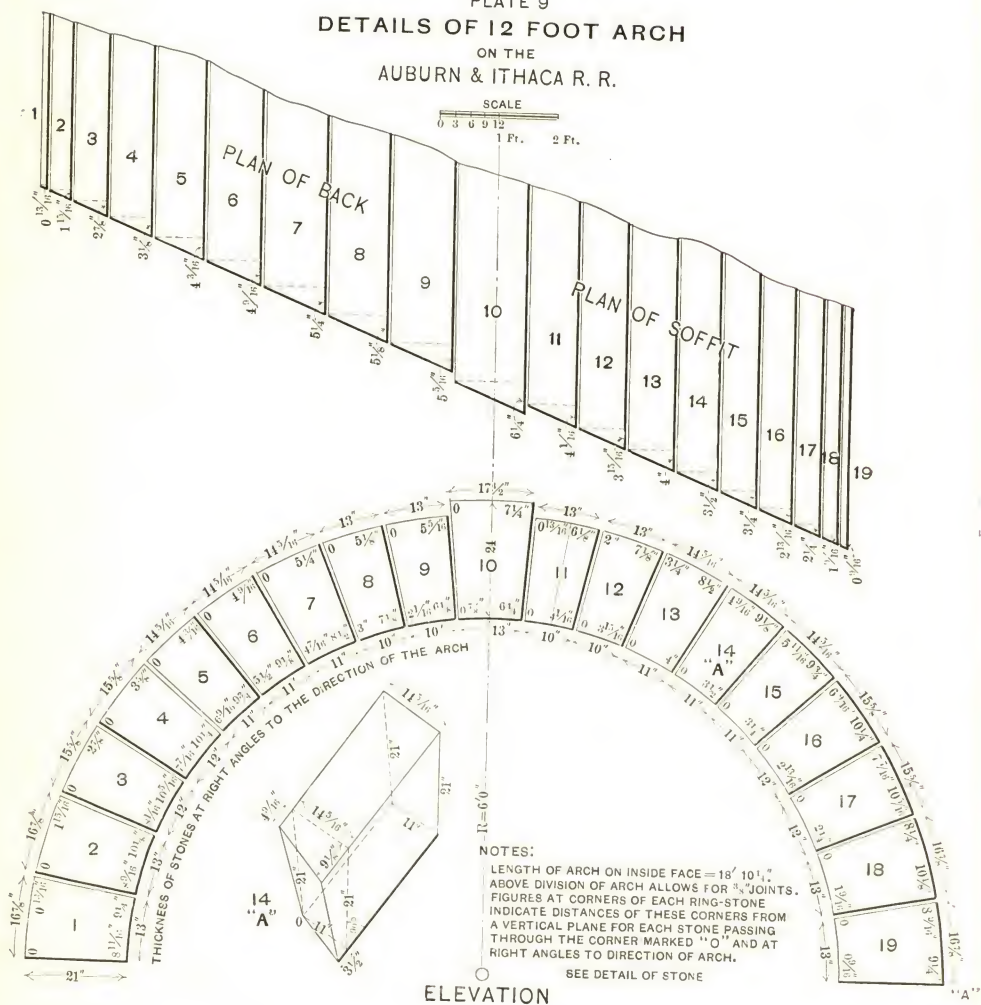



## PLATE IX.—DETAILS OF ARCH ON PLATE VIII.

49. Here are shown in a complete and simple manner the necessary details for the face-voussoirs of the skew-face arch on Plate VIII. The face is projected on a vertical plane at right angles to the axis of the arch, thus showing a semi-circle instead of a semiellipse. The  $18' 10\frac{1}{4}''$  given in the notes as the length of arch on inside face is the length of the intrados of a right section. As the thicknesses of the arch-stones are measured in this plane, it is evident that if proper measurements are given from such a plane to the outside corners of each face-stone the face of the arch will have the desired skew. These distances may be readily obtained from the complete plan of soffit and back. The plan as given shows the method, and for the sake of clearness the soffit and back are shown separate. Fig. 29 shows both projected on the same figure.

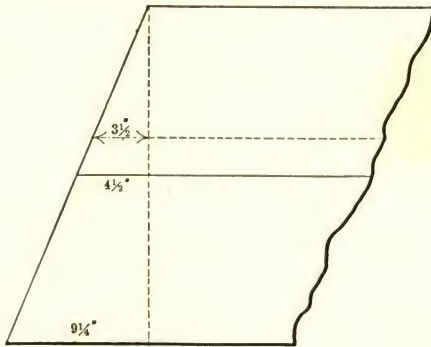


FIG. 29.

The dimensions given on the drawings, together with the specifications for the kinds of masonry of which the structure is to be built, will enable the mason to shape the stones properly.

Masonry for arch-culverts is sometimes divided into first and second class, but a general specification is as follows:

**50. Arch-culvert Masonry.**—The abutments are to be built of second-class masonry (§ 54).

The beds and joints of the arch-stone are to be accurately cut, and to be laid in courses throughout. The ring-stone will be neatly cut, and composed of alternate long and short bond-stones of not less than three feet and eighteen inches respectively. The parapet and wing walls will be built similarly to the abutments, and surmounted with a well-dressed coping, not less than fourteen inches thick and three feet wide, to be paid for at the same rate as for arch-culvert masonry. The outside stones to be laid in cement mortar, and the whole wall to be thoroughly grouted, each course separately. The spandrel-backing (haunching) to be good rubble-work, laid in mortar, built as directed by the engineer, and to be paid for at the same rate as third-class bridge masonry.

In any arch-culvert or bridge the abutments, wing and spandrel walls, and backing, or any of these, may, at the discretion of the engineer, be built of rubble-work, similar to that of third-class bridge masonry (§ 42), and when so built shall be paid for at the same price as that class of masonry.

**51. Exercises on Plates VIII and IX.**—1. Make an end elevation taken at right angles to the plane of the face of the arch.

2. Draw isometrics of, and patterns for, some of the coping-stones of the wing and parapet walls.


3. Check the corner dimensions given for the keystone on Plate IX, and make an isometric drawing of the stone.

Handwritten text in a vertical column on the left margin, likely a library or archival stamp. The text is written in a cursive script and includes the following lines from top to bottom:

1. 1871  
2. 1871  
3. 1871  
4. 1871  
5. 1871  
6. 1871  
7. 1871  
8. 1871  
9. 1871  
10. 1871  
11. 1871  
12. 1871  
13. 1871  
14. 1871  
15. 1871  
16. 1871  
17. 1871  
18. 1871  
19. 1871  
20. 1871  
21. 1871  
22. 1871  
23. 1871  
24. 1871  
25. 1871  
26. 1871  
27. 1871  
28. 1871  
29. 1871  
30. 1871  
31. 1871  
32. 1871  
33. 1871  
34. 1871  
35. 1871  
36. 1871  
37. 1871  
38. 1871  
39. 1871  
40. 1871  
41. 1871  
42. 1871  
43. 1871  
44. 1871  
45. 1871  
46. 1871  
47. 1871  
48. 1871  
49. 1871  
50. 1871  
51. 1871  
52. 1871  
53. 1871  
54. 1871  
55. 1871  
56. 1871  
57. 1871  
58. 1871  
59. 1871  
60. 1871  
61. 1871  
62. 1871  
63. 1871  
64. 1871  
65. 1871  
66. 1871  
67. 1871  
68. 1871  
69. 1871  
70. 1871  
71. 1871  
72. 1871  
73. 1871  
74. 1871  
75. 1871  
76. 1871  
77. 1871  
78. 1871  
79. 1871  
80. 1871  
81. 1871  
82. 1871  
83. 1871  
84. 1871  
85. 1871  
86. 1871  
87. 1871  
88. 1871  
89. 1871  
90. 1871  
91. 1871  
92. 1871  
93. 1871  
94. 1871  
95. 1871  
96. 1871  
97. 1871  
98. 1871  
99. 1871  
100. 1871



SOUTH ABUTMENT & PIER  
 JORDAN CREEK BRIDGE  
 LEHIGH VALLEY R. R.  
 PLATE 10

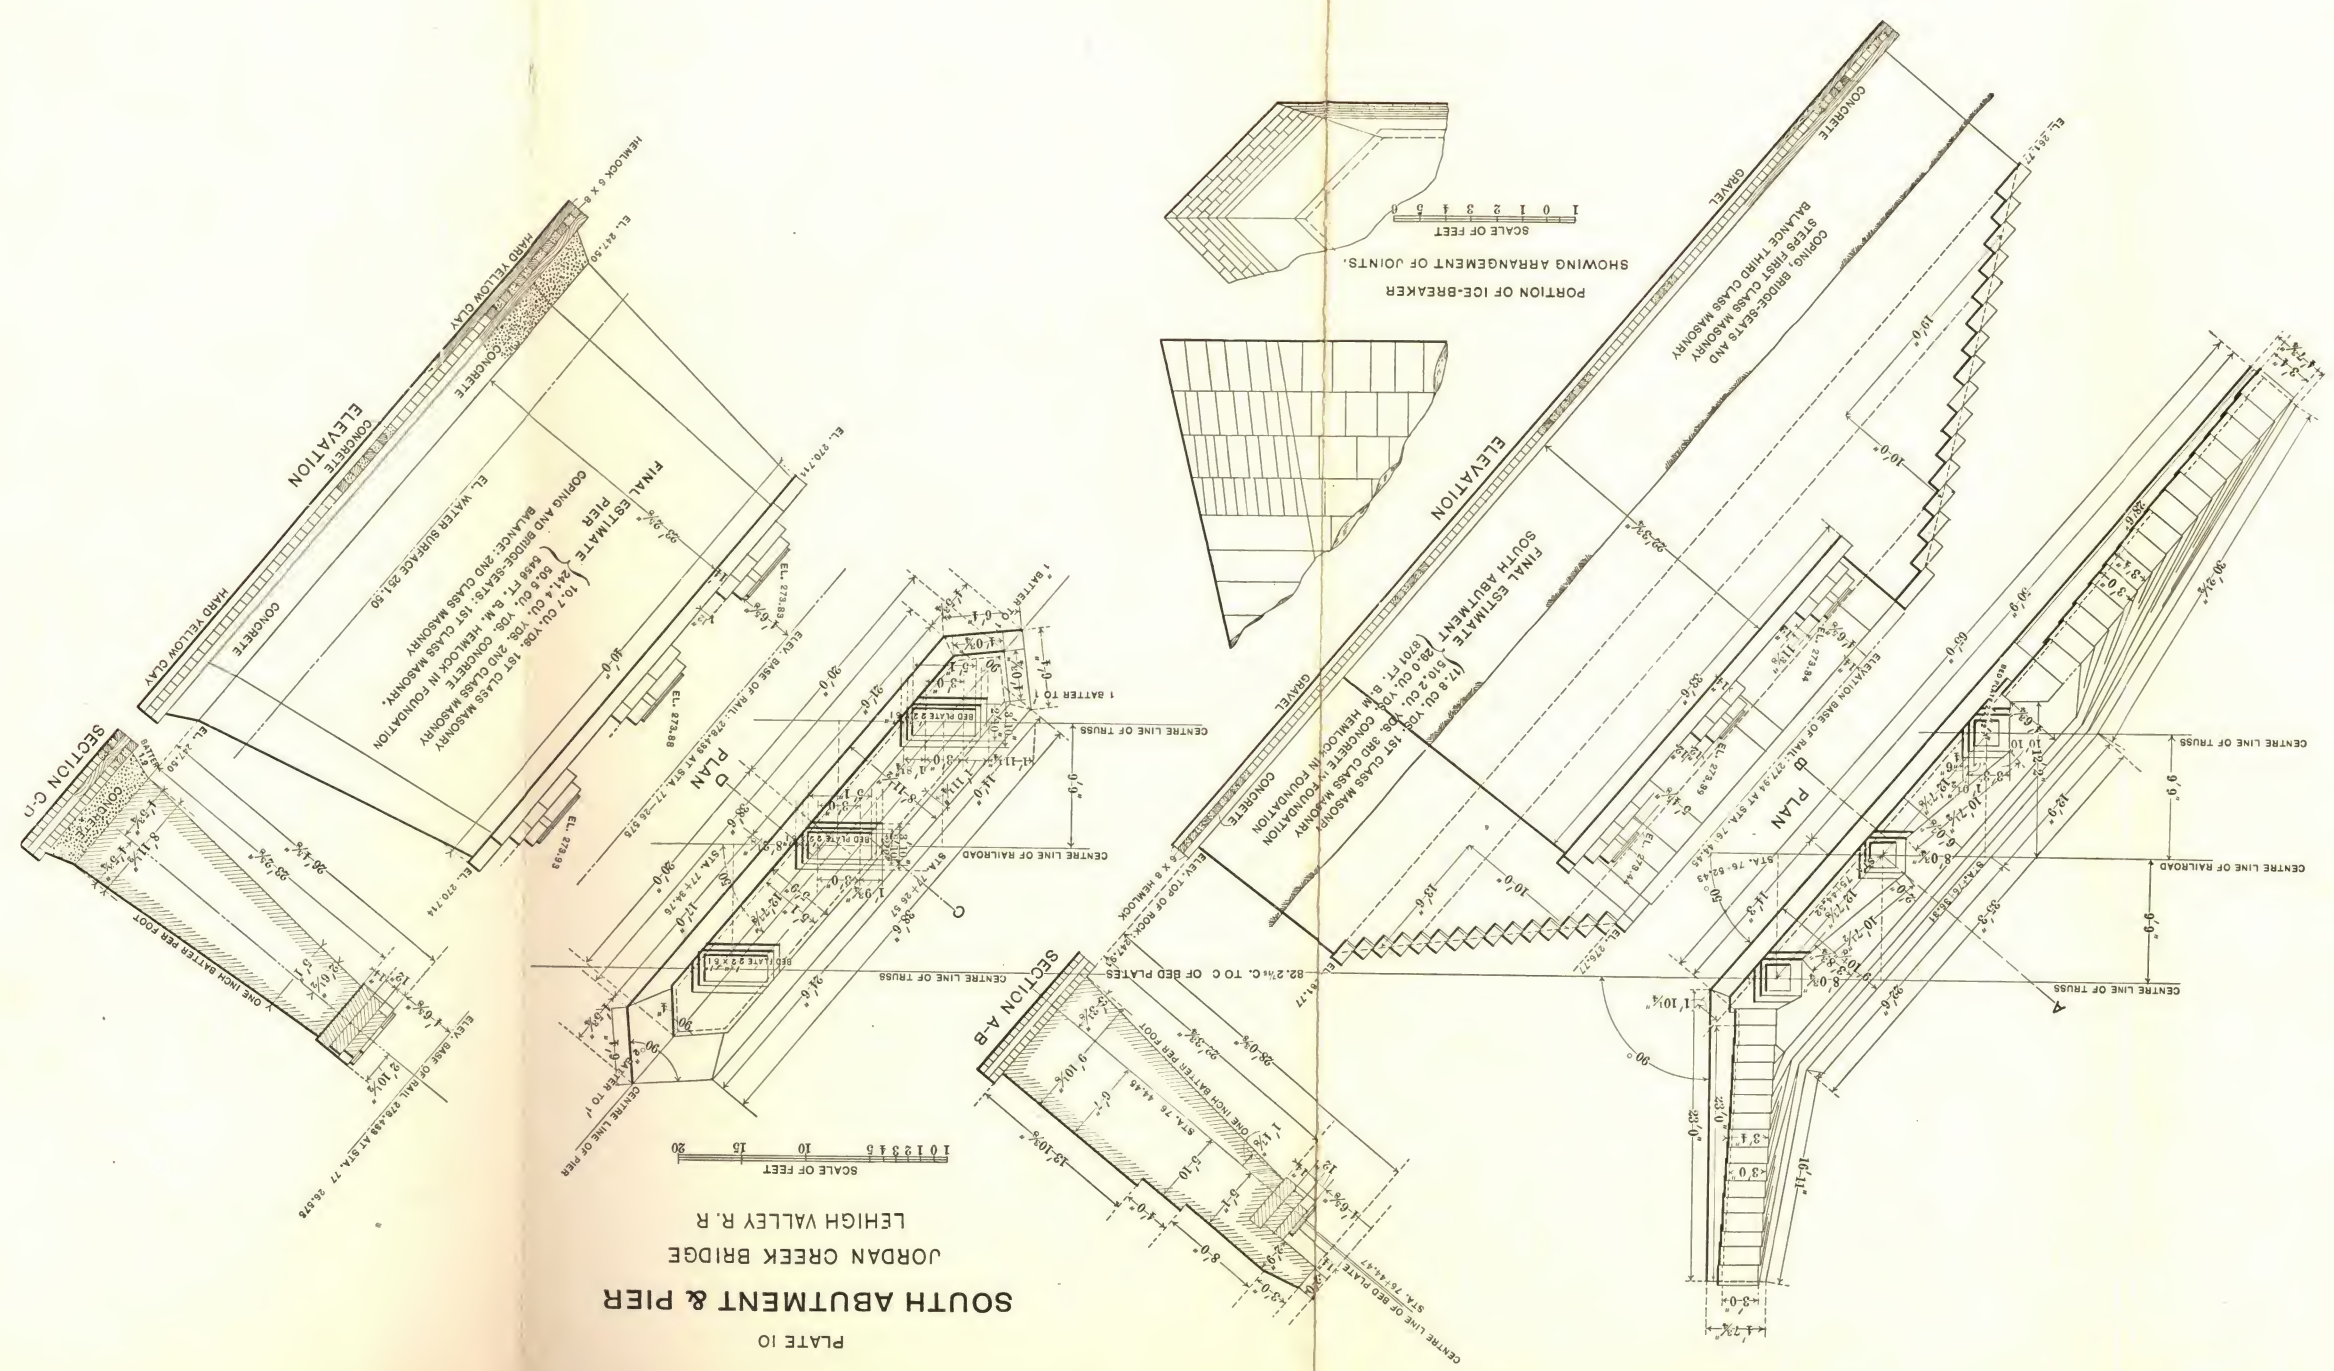



## ART. 6.—RAILROAD-BRIDGE MASONRY.

PLATE X.—ABUTMENT AND PIER ON LEHIGH VALLEY  
RAILROAD.

52. The drawings for this piece of work are much more finished in appearance than the actual structures. By comparison of this plate with No. 11 it will at once be seen that although a great many dimensions are given for the abutment and pier there are but very few dimension-stones and no details for any cut stone. A reference to the specifications for the kinds of masonry used (§§ 50, 53, and 54) shows plainly that no special details are needed. The original drawings are unusually well figured, but for the purpose of reproduction it was found necessary to omit some. The student's attention is, however, called to the fact that it is always well to give full dimensions for a working drawing if it is expected to carry out the work in exact accordance with them. Scaled dimensions, especially from a blue print, are apt to be very misleading. A close study of working drawings and noting carefully the work being done on similar structures in the course of erection will now teach the draughtsman where dimensions are most needed and where he can save himself unnecessary work.

Here, as on Plate VIII, the faces of the different walls have an even batter, while the backs are stepped.

Notice how the steps on the wing-walls radiate from the steps on the back of the abutment. The sections *AB* and *CD* are taken on broken lines in order that the thickness of



all of the stones supporting the bed-plates may be shown on one section.

The ends of the pier are shaped as shown to turn aside driftwood, ice, etc., and to prevent the forming of eddies around the pier, which might scour at the foundation.

**53. First-class Masonry** will be first-class rock range-work (§ 14). The stone to be accurately squared, jointed, and bedded, and laid in courses not less than ten inches thick, nor exceeding twenty-four inches in thickness, regularly decreasing from bottom to top of pier or abutment. The stretchers shall in no case have less than sixteen inches bed for a ten-inch course, and for all courses above sixteen inches at least as much bed as face; they shall generally be at least four feet in length. The headers will be of similar size with the stretchers, and shall hold the size in the heart of the wall that they show on the face, and be so arranged as to occupy one fifth of the face of the wall, and they will be similarly disposed in the back. When the thickness of the wall necessitates it, stones not less than four feet in length will be placed transversely in the heart of the wall, to connect the two opposite sides of it. The stones for the heart of the wall need not be jointed, but must be well fitted to their places. The stones forming the points of piers which act as ice-breakers shall be neatly dressed on their faces; the other face-stones will, with the exception of the draft, be generally left with the face as they come from the quarry, unless the projections above the draft should exceed two inches, in which case they shall be roughly scabbled down to that point. The coping shall not be less than fourteen inches thick and three feet wide, well dressed and fastened together and to lower courses with clamps of iron, without extra charge.

**54. Second-class Masonry.**—This comes under squared-

stone masonry (§§ 6 and 13), though the facing is generally a better grade of work. Extracts from specifications for this class are given below.

It shall be range-work or in broken courses, as may best suit the stone that is used. Face-stones to be accurately jointed and bedded, and no stone to be less than eight inches thick. The stretchers in the face to have beds of at least fifteen inches, and in no case less bed than rise, and to be not less than three feet long, measured in the face of the wall. The headers shall not have less than sixteen inches length of face, and shall extend at least three and one half feet into the wall, and not less than one header to every seven feet of wall, measured from centre to centre, and so arranged that a header in a superior course shall be placed between two headers in the course below. Backing-stones to be of large size, have parallel beds, but beds not dressed, as in first-class masonry. The outside stone to be set in cement mortar. Drafts to be cut on all corners of masonry.\*

---

\* For complete specifications on all grades of railroad masonry see "A Treatise on Masonry Construction," by Prof. I. O. Baker.

## ART. 7.—CANAL-LOCK MASONRY.

## PLATE XI.—ST. MARY'S FALLS CANAL-LOCK.

55. The drawings and specifications for this large and important piece of masonry are very detailed and very precise. Outside of government work such exhaustive drawings would hardly be furnished for similar construction.

Extracts from the specifications for the cut stone say:

“The cut stone shall conform approximately in dimensions to the bill of materials appended to these specifications, but exact drawings of the stones will be furnished the contractor when he needs them.”


No joints were cut closer than  $\frac{3}{8}$  inch, and it was specified that, “No joint shall vary in thickness from the dimensions specified, and the dimensions of all stones shall be such that the centre of each vertical joint shall not vary more than  $\frac{1}{10}$  inch on either side of a vertical line through the centre of the lowest corresponding joint.”

Drawings were therefore made of every course of stone in the lock (and there were twenty-three such courses), elevations, sections and patterns, and other details, specimens of which are shown on Plate XI. The full-size patterns for every stone not rectangular were cut out of zinc and furnished the contractor by the United States engineers in charge.


56. There being a large number of such patterns (471), some system of identification was of course necessary, and each different pattern received a distinctive number. The numbering on the plan and the patterns corresponding are





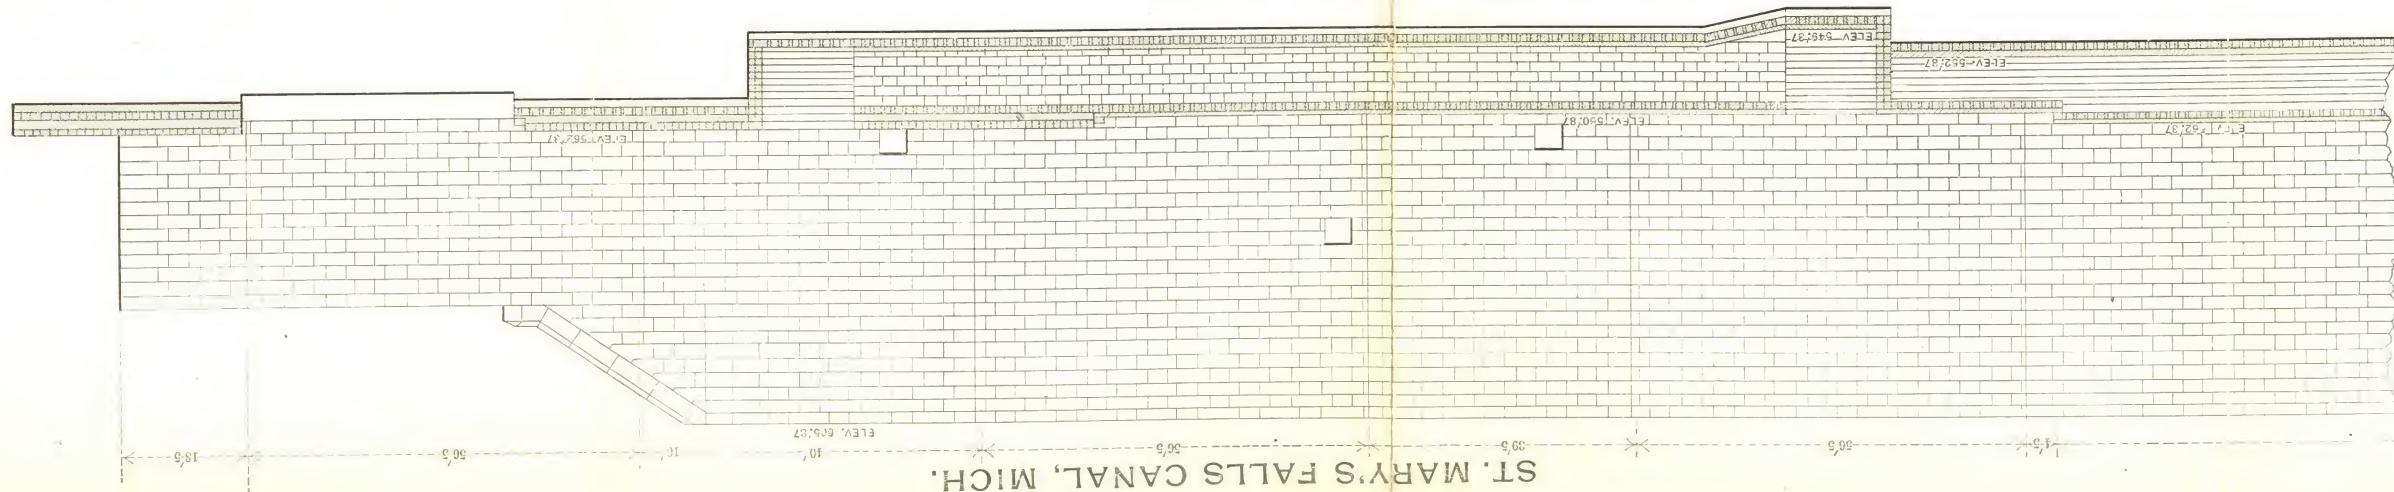

LONGITUDINAL SECTION OF FLOOR  
AND  
ELEVATION OF WALL AT EAST END

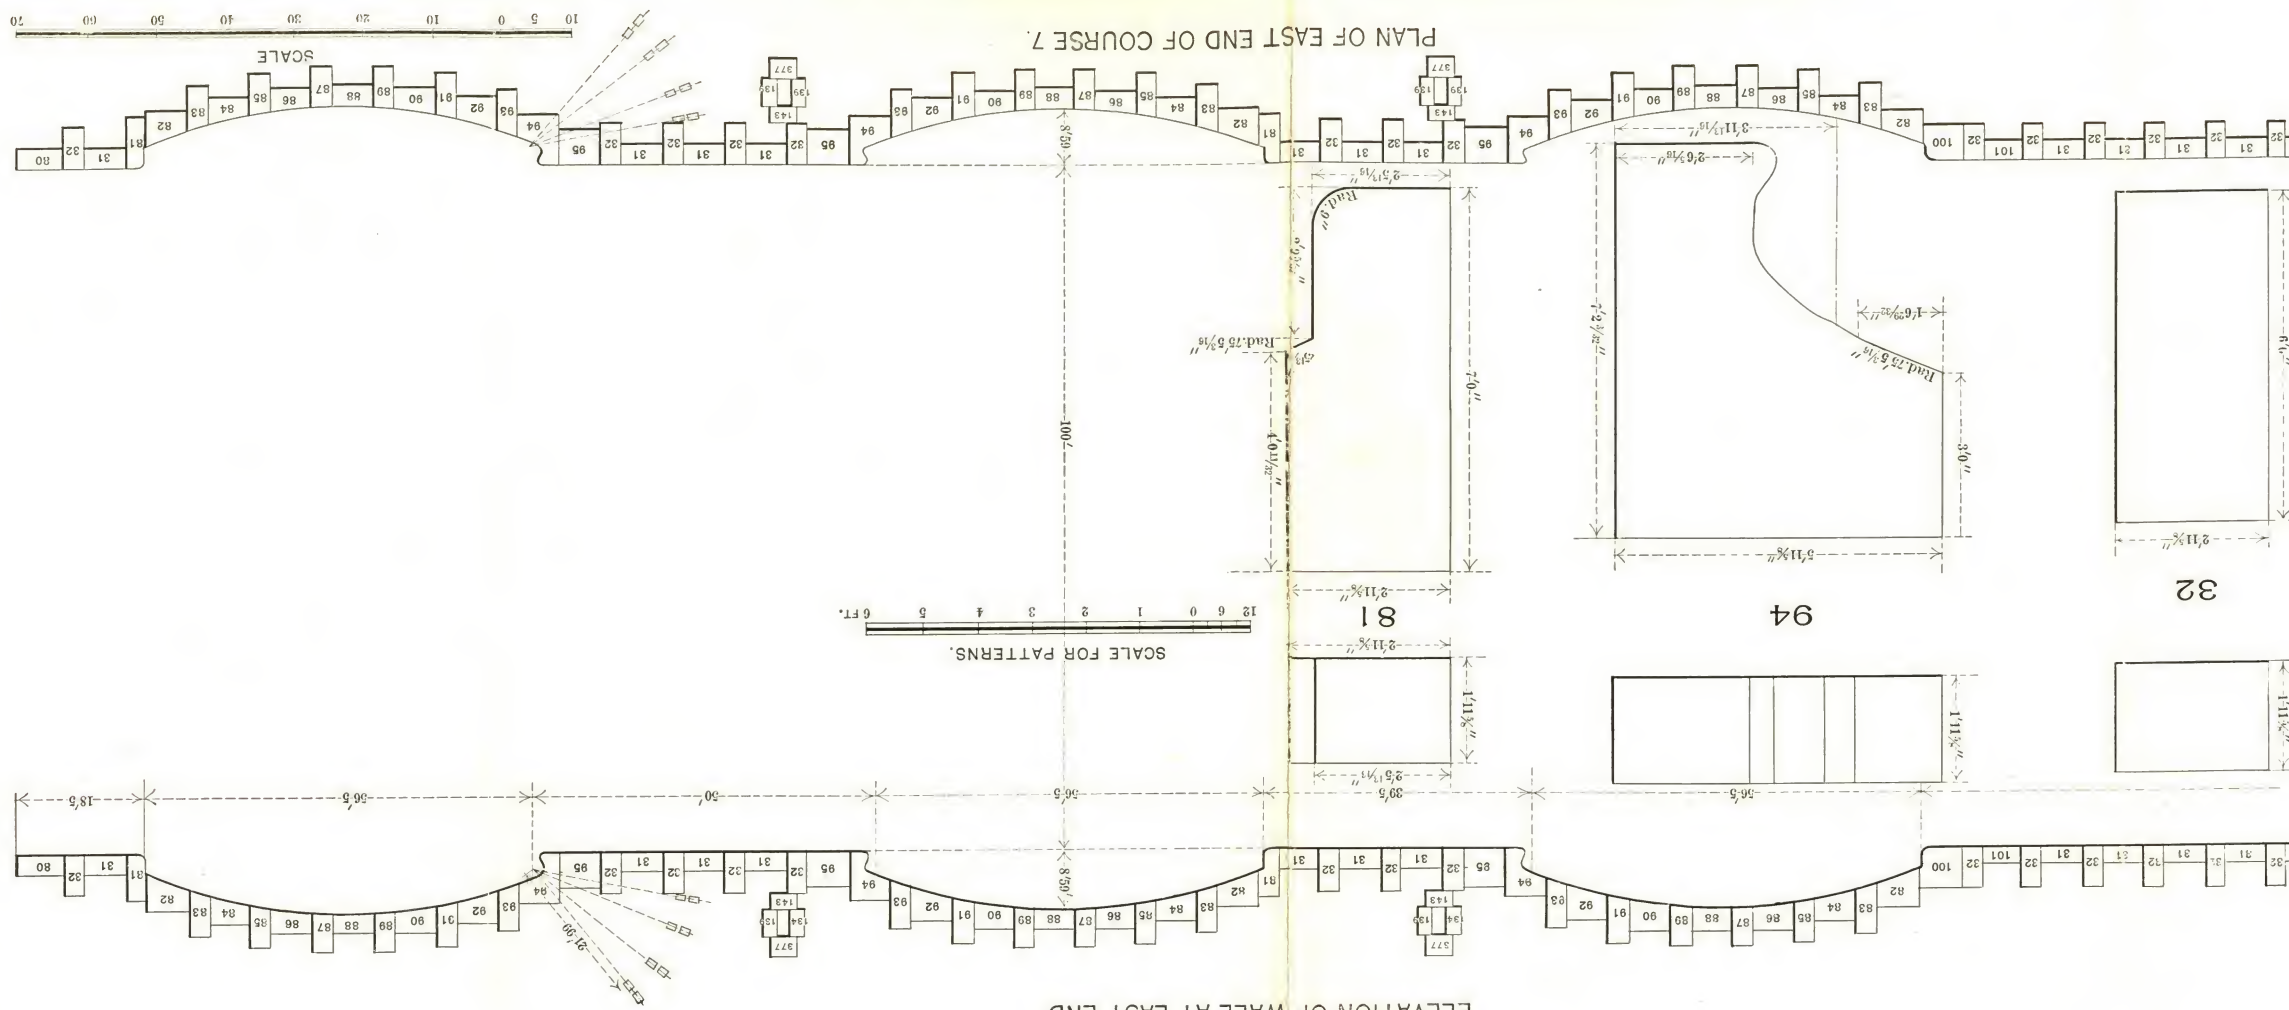



shown on this plate. An idea of the scheme followed for identifying the cut stone for a large building, as they are received from the stone-cutters, may be gained from Plates XII and XIII.

In the lock now under consideration the finished stone, when inspected by the United States inspector at the stone-yard, was marked with its proper pattern number, course number, and running number. The exact place on the wall for each stone of the successive courses as carried up was accurately marked for the contractor. The contractor, therefore, had only to cut the stone to certain patterns and put it on the place marked for it on the wall. There were over 1400 pieces of cut stone, aggregating nearly 19,000 cubic yards, and they all went together so nicely that it took less than ten hours' work for a stone-cutter to correct errors on the whole job.

57. The stones varied in size from  $3\frac{1}{2}$  ft.  $\times$  8 ft.  $\times$   $8\frac{1}{2}$  ft. to  $\frac{3}{8}$  ft.  $\times$   $1\frac{1}{8}$  ft.  $\times$  8 ft., giving 238 and 6 cu. ft. respectively. In general the dimensions were 2 ft.  $\times$  3 ft.  $\times$  6 ft. As the stone was specified to weigh not less than 148 lbs. to the cubic foot, the above dimensions give over 35,000 lbs. for the largest, and over 5000 lbs. for the average weight of each stone. These figures should give the student a good guide as to the dimensioning of cut stone, that they may be easily handled with the ordinary machinery.

It may be of interest to note that the cut-stone work in this structure was furnished and laid in the walls for \$28.50 per cu. yd., a reasonable figure for such work.

## ART. 8.—ARCHITECTURAL STONEMWORK.

PLATE XII.—TOWER DOOR FROM THE BUILDING FOR  
LIBRARY OF CONGRESS.

58. The drawings on this and the next two plates are further examples of carefully detailed work. All the face-stones in this immense building are dimension-stones, and details like those on Plate XI were necessary. In this case, however, the usual practice was followed; namely, that of furnishing the contractor for the stonework with the dimensioned drawings instead of the patterns, and letting him make the latter himself. The inspected stone was properly marked for ready identification, shipped to the site of the building, and at once deposited near its final place.

59. Plate XII is a recessed entrance in a circular wall. The clear opening, being less than four feet, is readily spanned by a single stone and the construction of an arch as in Plate V avoided.

60. **Exercises.**—1. Draw a horizontal section through the course *G*.

2. Draw isometrics of the stones *d*, *b*, and *c*.
3. Draw the necessary patterns for *d*, *b*, and *c*.
4. Draw an isometric of, and the necessary patterns for, one of the stones in the doorway, in course *E*.

PLATE 12  
TOWER DOOR  
FROM THE  
LIBRARY OF CONGRESS

SCALE  
0 1 Ft.


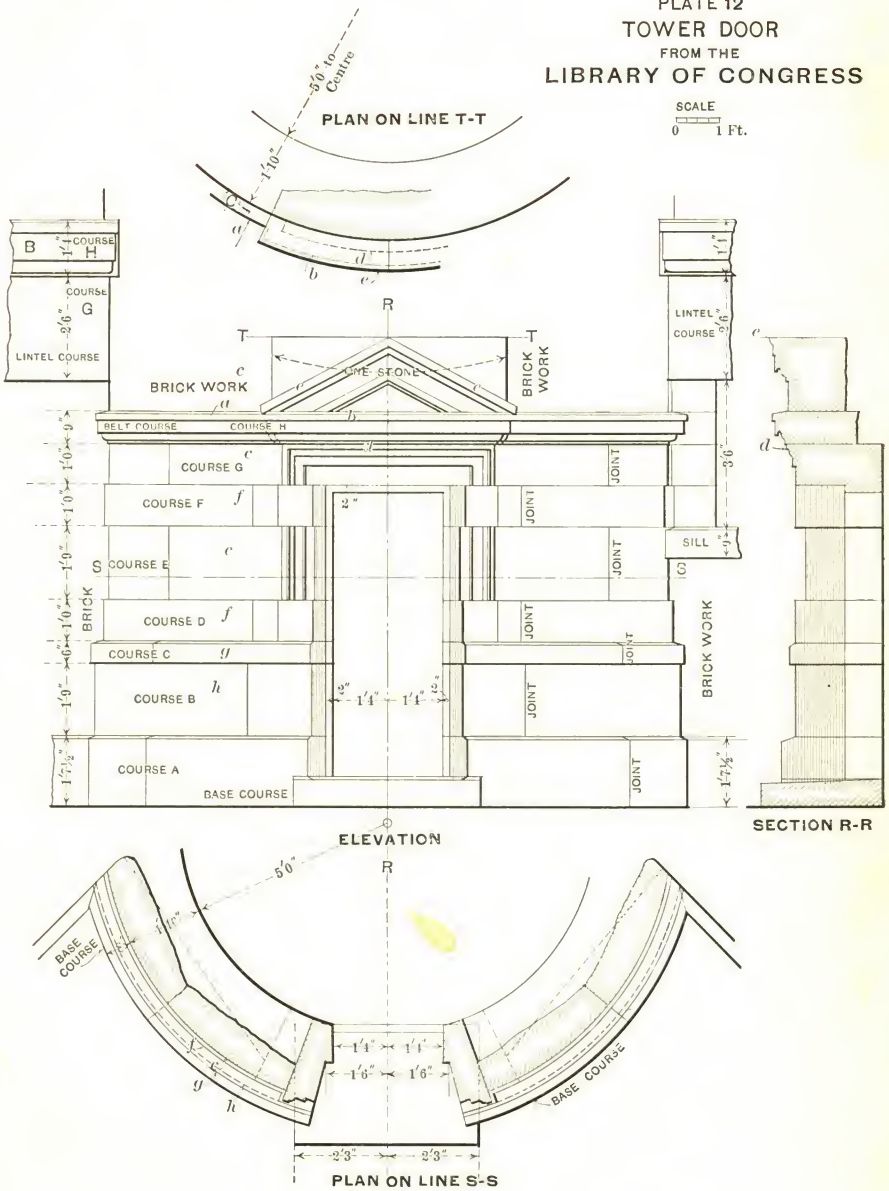



PLATE 13  
ENTRANCE & PORTE COCHÈRE  
FROM THE  
LIBRARY OF CONGRESS

SCALE OF FEET  
0 1

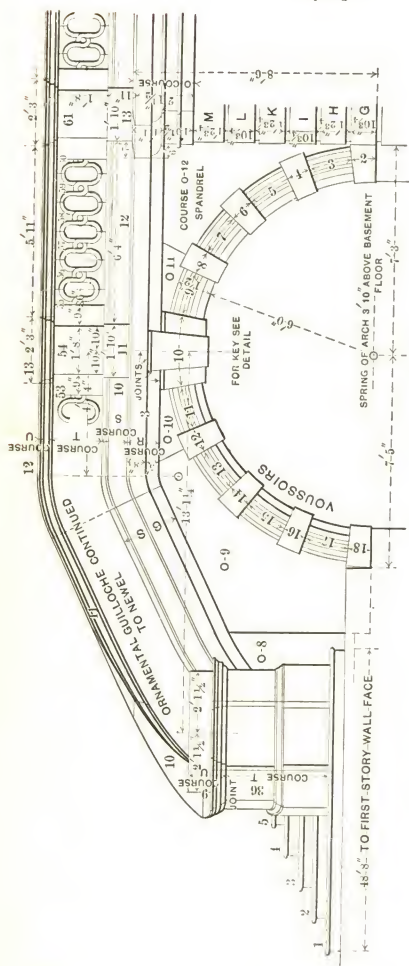

ELEVATION

NOTE: FIGURES FOR STEPS & PLATFORMS TAKEN TO FACES OF RISERS AND PLATFORMS, NOT TO NOSING

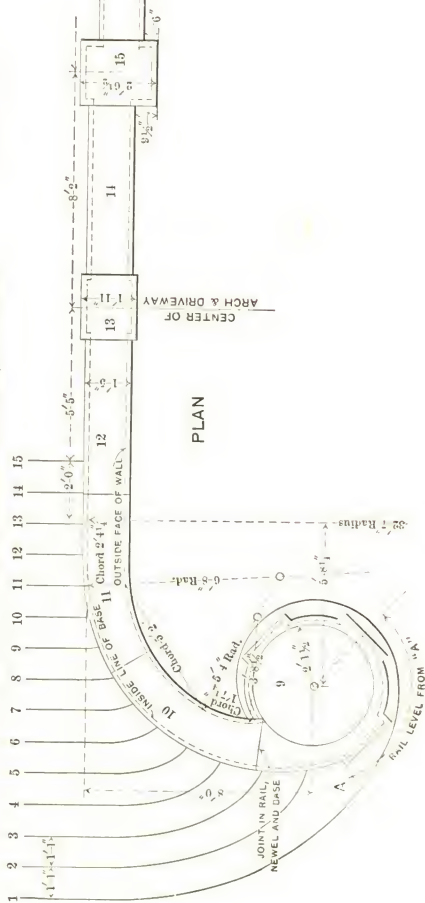




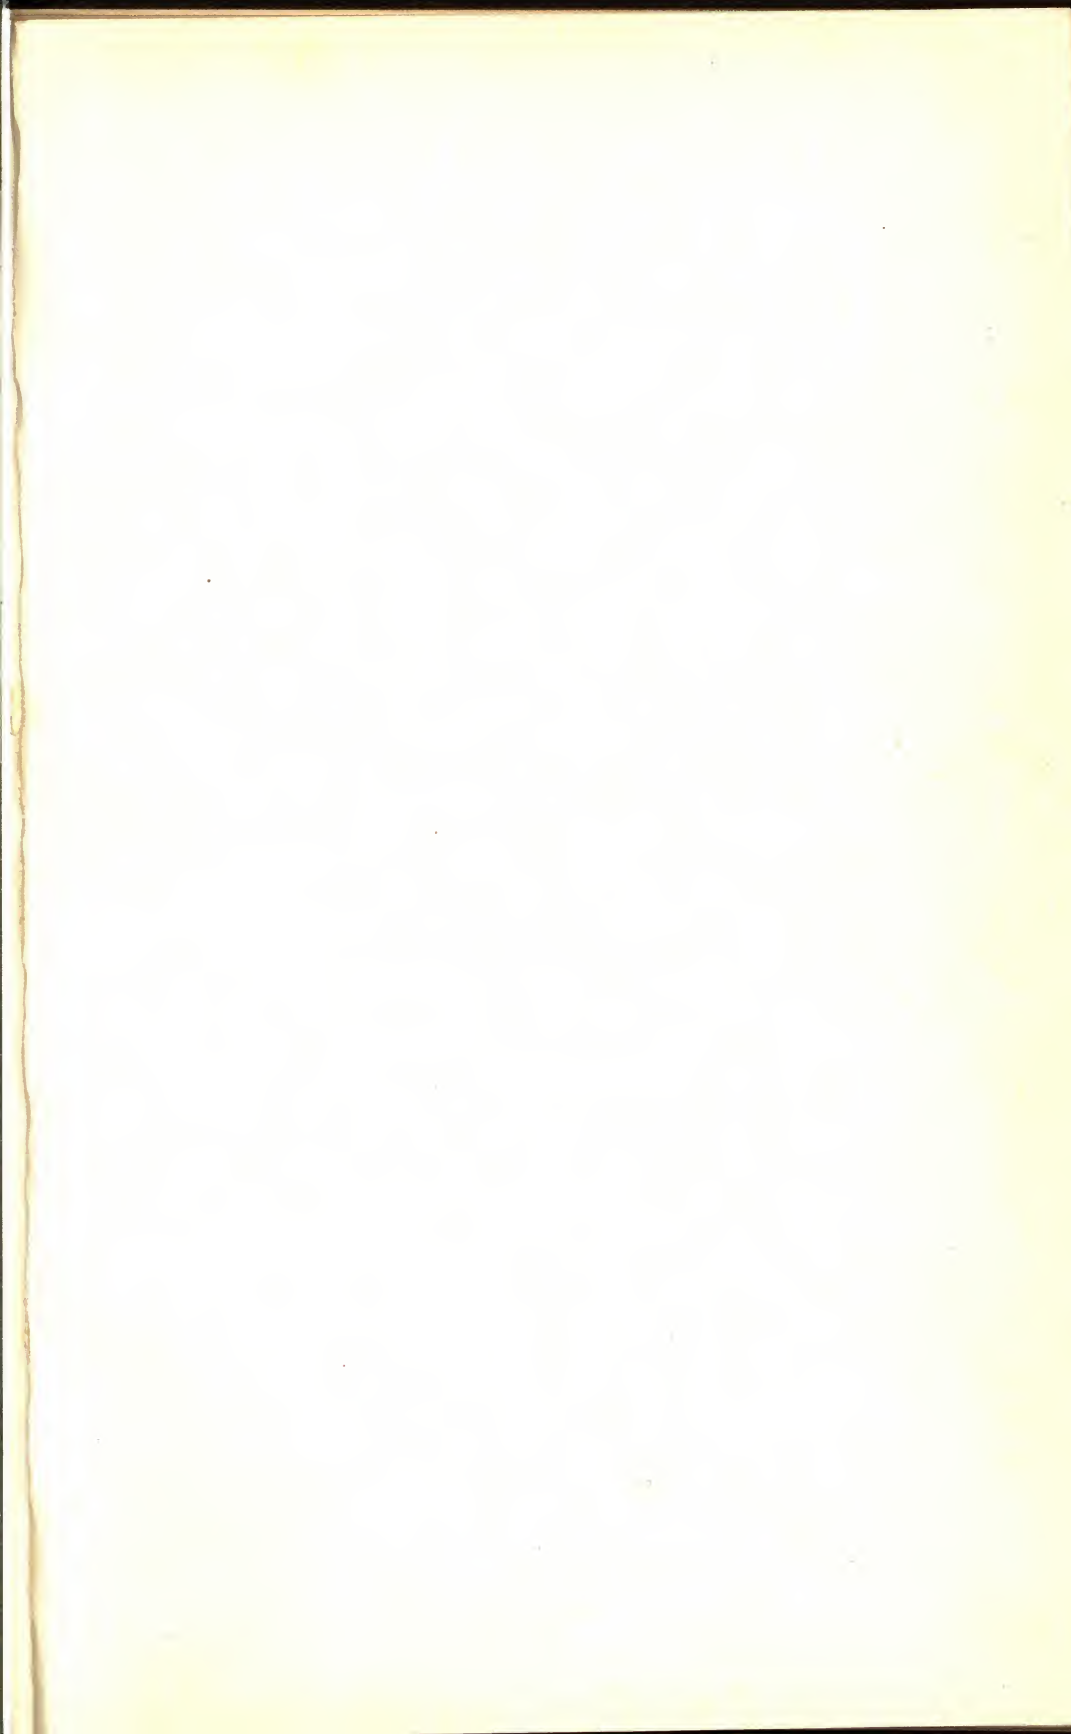






PLATE 14  
ENTRANCE & PORTE COCHERE  
FROM THE  
LIBRARY OF CONGRESS

SCALE OF FEET  
0 1

ELEVATION OF ENTRANCE STEPS

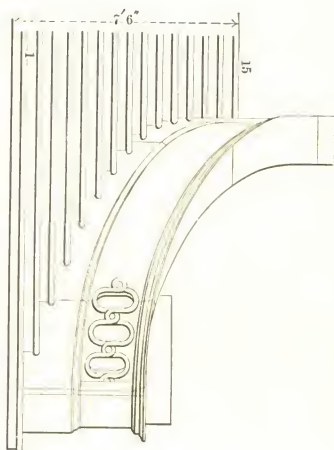

DEVELOPMENT OF RAILING

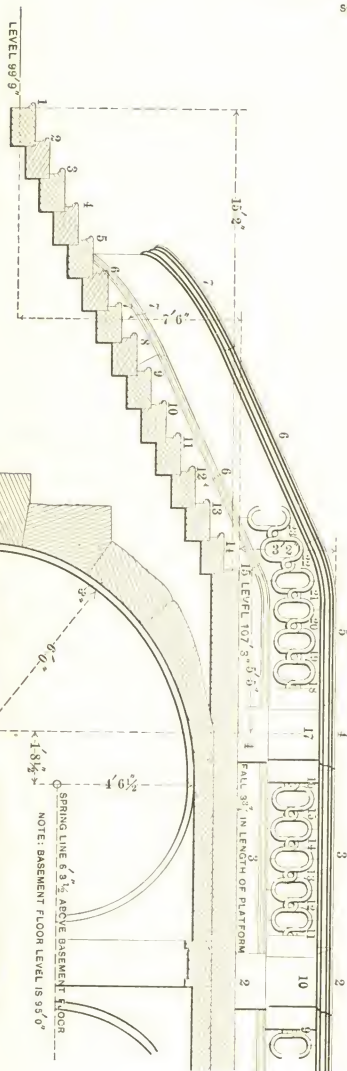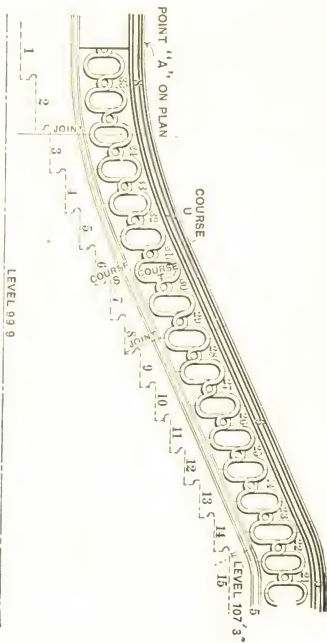

LONGITUDINAL SECTION

NOTE: BASEMENT FLOOR LEVEL IS 95' 0"


PLATES XIII AND XIV.—ENTRANCE AND PORTE COCHÈRE  
FROM BUILDING FOR LIBRARY OF CONGRESS.

**61.** These drawings show a complex and elegant piece of architectural masonry. It is impossible in this limited space to give all the necessary detail drawings, but a sufficient number are given to show the student what else would be required. Every joint of the stones is carefully shown, so that the full-size patterns can easily be made, and the dimensions extending into the walls are given by numerous sections. Some of those not shown are horizontal sections of the courses marked *R*, *S*, *T*, and *U* on the elevation, and vertical sections at different points along the railing, etc.

**62.** The development of the railing is obtained very simply, thus: From the point *A* on the plan as an origin the length of tread No. 1 as measured on the outer curve of the rail is laid off in the development; 2, 3, 4, etc., are similarly laid off, and the vertical distances of the railing above the plane of each step as obtained from the elevation marked on the corresponding places of the development. The pattern of each stone of the railing is now easily obtained by bending the developed pieces to the proper curves shown on the plan. The faces are of course left rough, so that the cutter who does the artistic work may draw and cut the ornaments.

**63. Exercises.**—1. Make details, isometric and patterns, for one of the railing-posts.

2. How would the stone-cutter work the skew part of the top of the railing?

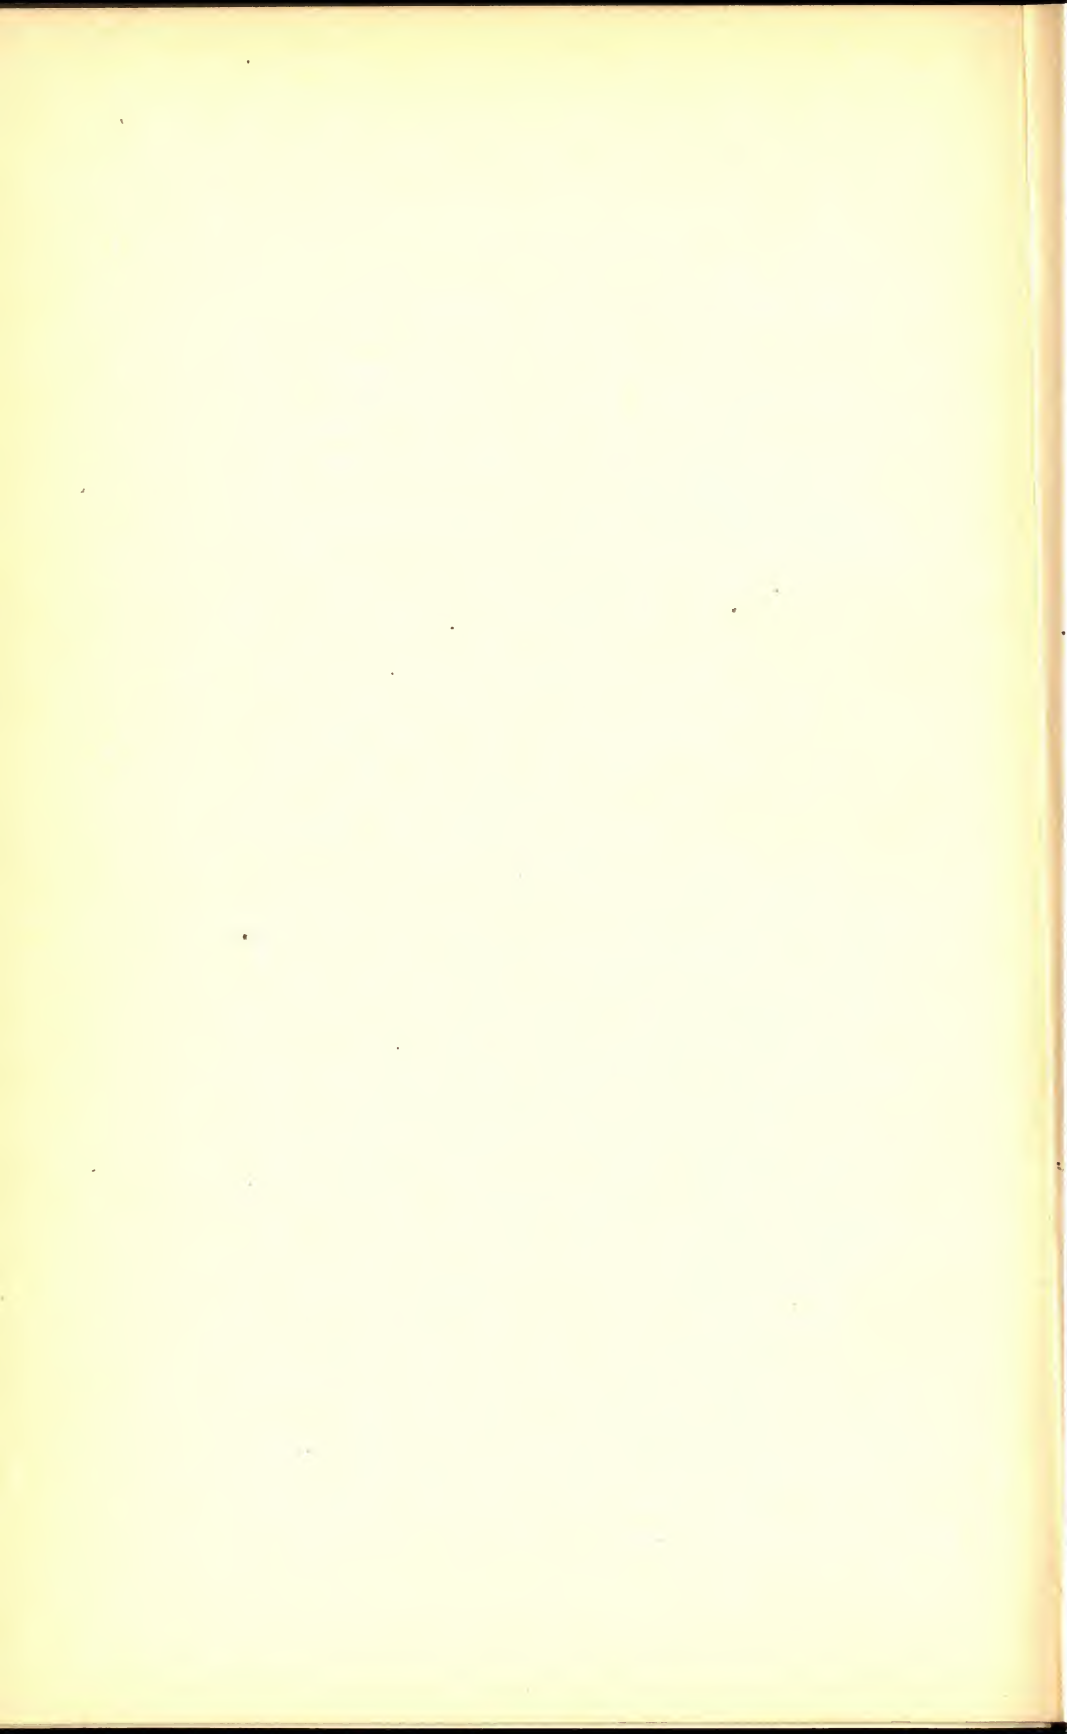

# SHORT-TITLE CATALOGUE

OF THE  
PUBLICATIONS

OF  
JOHN WILEY & SONS,

NEW YORK.

LONDON: CHAPMAN & HALL, LIMITED.

ARRANGED UNDER SUBJECTS.

Descriptive circulars sent on application. Books marked with an asterisk (\*) are sold at *net* prices only. All books are bound in cloth unless otherwise stated.

## AGRICULTURE—HORTICULTURE—FORESTRY.

Armsby's Manual of Cattle-feeding. ....	12mo, \$1 75
Principles of Animal Nutrition. ....	8vo, 4 00
Budd and Hansen's American Horticultural Manual:	
Part I. Propagation, Culture, and Improvement. ....	12mo, 1 50
Part II. Systematic Pomology. ....	12mo, 1 50
Elliott's Engineering for Land Drainage. ....	12mo, 1 50
Practical Farm Drainage. ....	12mo, 1 00
Graves's Forest Mensuration. ....	8vo, 4 00
Green's Principles of American Forestry. ....	12mo, 1 50
Grotenfelt's Principles of Modern Dairy Practice. (Woll.) ....	12mo, 2 00
* Herrick's Denatured or Industrial Alcohol. ....	8vo, 4 00
Kemp and Waugh's Landscape Gardening. (New Edition, Rewritten. In Preparation).	
* McKay and Larsen's Principles and Practice of Butter-making. ....	8vo, 1 50
Maynard's Landscape Gardening as Applied to Home Decoration. ....	12mo, 1 50
Quaintance and Scott's Insects and Diseases of Fruits. (In Preparation).	
Sanderson's Insects Injurious to Staple Crops. ....	12mo, 1 50
* Schwarz's Longleaf Pine in Virgin Forests. ....	12mo, 1 25
Stockbridge's Rocks and Soils. ....	8vo, 2 50
Winton's Microscopy of Vegetable Foods. ....	8vo, 7 50
Woll's Handbook for Farmers and Dairy-men. ....	16mo, 1 50

## ARCHITECTURE.

Baldwin's Steam Heating for Buildings. ....	12mo, 2 50
Berg's Buildings and Structures of American Railroads. ....	4to, 5 00
Birkmire's Architectural Iron and Steel. ....	8vo, 3 50
Compound Riveted Girders as Applied in Buildings. ....	8vo, 2 00
Planning and Construction of American Theatres. ....	8vo, 3 00
Planning and Construction of High Office Buildings. ....	8vo, 3 50
Skeleton Construction in Buildings. ....	8vo, 3 00
Briggs's Modern American School Buildings. ....	8vo, 4 00
Byrne's Inspection of Material and Workmanship Employed in Construction.	
.....	16mo, 3 00
Carpenter's Heating and Ventilating of Buildings. ....	8vo, 4 00



* Corthell's Allowable Pressure on Deep Foundations.....	12mo,	1 25
Freitag's Architectural Engineering.....	8vo	3 50
Fireproofing of Steel Buildings.....	8vo,	2 50
French and Ives's Stereotomy.....	8vo,	2 50
Gerhard's Guide to Sanitary House-Inspection.....	16mo,	1 00
* Modern Baths and Bath Houses.....	8vo,	3 00
Sanitation of Public Buildings.....	12mo,	1 50
Theatre Fires and Panics.....	12mo,	1 50
Holley and Ladd's Analysis of Mixed Paints, Color Pigments, and Varnishes		
Large 12mo,	2 50	
Johnson's Statics by Algebraic and Graphic Methods.....	8vo,	2 00
Kellaway's How to Lay Out Suburban Home Grounds.....	8vo,	2 00
Kidder's Architects' and Builders' Pocket-book.....	16mo, mor.,	5 00
Maire's Modern Pigments and their Vehicles.....	12mo,	2 00
Merrill's Non-metallic Minerals: Their Occurrence and Uses.....	8vo,	4 00
Stones for Building and Decoration.....	8vo,	5 00
Monckton's Stair-building.....	4to,	4 00
Patton's Practical Treatise on Foundations.....	8vo,	5 00
Peabody's Naval Architecture.....	8vo,	7 50
Rice's Concrete-block Manufacture.....	8vo,	2 00
Richey's Handbook for Superintendents of Construction.....	16mo, mor.,	4 00
* Building Mechanics' Ready Reference Book:		
* Building Foreman's Pocket Book and Ready Reference. (In		
Preparation).		
* Carpenters' and Woodworkers' Edition.....	16mo, mor.	1 50
* Cement Workers and Plasterer's Edition.....	16mo, mor.	1 50
* Plumbers', Steam-Filters', and Tinnern's Edition.....	16mo, mor.	1 50
* Stone- and Brick-masons' Edition.....	16mo, mor.	1 50
Sabin's Industrial and Artistic Technology of Paints and Varnish.....	8vo,	3 00
Siebert and Biggin's Modern Stone-cutting and Masonry.....	8vo,	1 50
Snow's Principal Species of Wood.....	8vo,	3 50
Towne's Locks and Builders' Hardware.....	18mo, mor.	3 00
Wait's Engineering and Architectural Jurisprudence.....	8vo,	6 00
Sheep,	6 50	
Law of Contracts.....	8vo,	3 00
Law of Operations Preliminary to Construction in Engineering and Archi-		
tecture.....	8vo,	5 00
Sheep,	5 50	
Wilson's Air Conditioning.....	12mo,	1 50
Worcester and Atkinson's Small Hospitals, Establishment and Maintenance,		
Suggestions for Hospital Architecture, with Plans for a Small Hospital.		
12mo,	1 25	

## ARMY AND NAVY.

Bernadou's Smokeless Powder, Nitro-cellulose, and the Theory of the Cellulose		
Molecule.....	12mo,	2 50
Chase's Art of Pattern Making.....	12mo,	2 50
Screw Propellers and Marine Propulsion.....	8vo,	3 00
Cloke's Gunner's Examiner.....	8vo,	1 50
Craig's Azimuth.....	4to,	3 50
Crehore and Squier's Polarizing Photo-chronograph.....	8vo,	3 00
* Davis's Elements of Law.....	8vo,	2 50
* Treatise on the Military Law of United States.....	8vo,	7 00
Sheep,	7 50	
De Brack's Cavalry Outpost Duties. (Carr.).....	24mo, mor.	2 00
* Dudley's Military Law and the Procedure of Courts-martial..	Large 12mo,	2 50
Durand's Resistance and Propulsion of Ships.....	8vo,	5 00



* Dyer's Handbook of Light Artillery. ....	12mo,	3 00
Eissler's Modern High Explosives. ....	8vo,	4 00
* Fiebeger's Text-book on Field Fortification. ....	Large 12mo,	2 00
Hamilton and Bond's The Gunner's Catechism. ....	18mo,	1 00
* Hoff's Elementary Naval Tactics. ....	8vo,	1 50
Ingalls's Handbook of Problems in Direct Fire. ....	8vo,	4 00
* Lissak's Ordnance and Gunnery. ....	8vo,	6 00
* Ludlow's Logarithmic and Trigonometric Tables. ....	8vo,	1 00
* Lyons's Treatise on Electromagnetic Phenomena. Vols. I. and II. 8vo, each, 6 00		
* Mahan's Permanent Fortifications. (Mercur.).....	8vo, half mor.	7 50
Manual for Courts-martial. ....	16mo, mor.	1 50
* Mercur's Attack of Fortified Places. ....	12mo,	2 00
* Elements of the Art of War. ....	8vo,	4 00
Metcalf's Cost of Manufactures—And the Administration of Workshops. 8vo, 5 00		
* Ordnance and Gunnery. 2 vols. .... Text 12mo, Plates atlas form 5 00		
Nixon's Adjutants' Manual. ....	24mo,	1 00
Peabody's Naval Architecture. ....	8vo,	7 50
* Phelps's Practical Marine Surveying. ....	8vo,	2 50
Powell's Army Officer's Examiner. ....	12mo,	4 00
Sharpe's Art of Subsisting Armies in War. ....	18mo, mor.	1 50
* Tupes and Poole's Manual of Bayonet Exercises and Musketry Fencing. ....	24mo, leather,	50
* Weaver's Military Explosives. ....	8vo,	3 00
Woodhull's Notes on Military Hygiene. ....	16mo,	1 50

#### ASSAYING.

Betts's Lead Refining by Electrolysis. ....	8vo,	4 00
Fletcher's Practical Instructions in Quantitative Assaying with the Blowpipe. ....	16mo, mor.	1 50
Furman's Manual of Practical Assaying. ....	8vo,	3 00
Lodge's Notes on Assaying and Metallurgical Laboratory Experiments. ....	8vo,	3 00
Low's Technical Methods of Ore Analysis. ....	8vo,	3 00
Miller's Cyanide Process. ....	12mo,	1 00
Manual of Assaying. ....	12mo,	1 00
Minet's Production of Aluminum and its Industrial Use. (Waldo.) ....	12mo,	2 50
O'Driscoll's Notes on the Treatment of Gold Ores. ....	8vo,	2 00
Ricketts and Miller's Notes on Assaying. ....	8vo,	3 00
Robine and Lenglen's Cyanide Industry. (Le Clerc.) ....	8vo,	4 00
Ulke's Modern Electrolytic Copper Refining. ....	8vo,	3 00
Wilson's Chlorination Process. ....	12mo,	1 50
Cyanide Processes. ....	12mo,	1 50

#### ASTRONOMY.

Comstock's Field Astronomy for Engineers. ....	8vo,	2 50
Craig's Azimuth. ....	4to,	3 50
Crandall's Text-book on Geodesy and Least Squares. ....	8vo,	3 00
Doolittle's Treatise on Practical Astronomy. ....	8vo,	4 00
Gore's Elements of Geodesy. ....	8vo,	2 50
Hayford's Text-book of Geodetic Astronomy. ....	8vo,	3 00
Merriman's Elements of Precise Surveying and Geodesy. ....	8vo,	2 50
* Michie and Harlow's Practical Astronomy. ....	8vo,	3 00
Rust's Ex-meridian Altitude, Azimuth and Star-Finding Tables. (In Press.)		
* White's Elements of Theoretical and Descriptive Astronomy. ....	12mo,	2 00

## CHEMISTRY.

<b>Abderhalden's Physiological Chemistry in Thirty Lectures. (Hall and Defren).</b>		
(In Press.)		
* Abegg's Theory of Electrolytic Dissociation. (von Ende.)	12mo,	1 25
Adriance's Laboratory Calculations and Specific Gravity Tables.	12mo,	1 25
Alexeyeff's General Principles of Organic Syntheses. (Matthews.)	8vo,	3 00
Allen's Tables for Iron Analysis.	8vo,	3 00
Arnold's Compendium of Chemistry. (Mandel.)	Large 12mo,	3 50
Association of State and National Food and Dairy Departments, Hartford Meeting, 1906.	8vo,	3 00
Jamestown Meeting, 1907.	8vo,	3 00
Austen's Notes for Chemical Students	12mo,	1 50
Baskerville's Chemical Elements. (In Preparation).		
Bernadou's Smokeless Powder.—Nitro-cellulose, and Theory of the Cellulose Molecule.	12mo,	2 50
* Blanchard's Synthetic Inorganic Chemistry.	12mo,	1 00
* Browning's Introduction to the Rarer Elements.	8vo,	1 50
Brush and Penfield's Manual of Determinative Mineralogy.	8vo,	4 00
* Claassen's Beet-sugar Manufacture. (Hall and Rolfe.)	8vo,	3 00
Classen's Quantitative Chemical Analysis by Electrolysis. (Boltwood.)	8vo,	3 00
Cohn's Indicators and Test-papers.	12mo,	2 00
Tests and Reagents.	8vo,	3 00
* Danneel's Electrochemistry. (Merriam.)	12mo,	1 25
Duhem's Thermodynamics and Chemistry. (Burgess.)	8vo,	4 00
Eakle's Mineral Tables for the Determination of Minerals by their Physical Properties.	8vo,	1 25
Eissler's Modern High Explosives.	8vo,	4 00
Effront's Enzymes and their Applications. (Prescott.)	8vo,	3 00
Erdmann's Introduction to Chemical Preparations. (Dunlap.)	12mo,	1 25
* Fischer's Physiology of Alimentation.	Large 12mo,	2 00
Fletcher's Practical Instructions in Quantitative Assaying with the Blowpipe.	12mo, mor.	1 50
Fowler's Sewage Works Analyses.	12mo,	2 00
Fresenius's Manual of Qualitative Chemical Analysis. (Wells.)	8vo,	5 00
Manual of Qualitative Chemical Analysis. Part I. Descriptive. (Wells.)	8vo,	3 00
Quantitative Chemical Analysis. (Cohn.) 2 vols.	8vo,	12 50
When Sold Separately, Vol. I, \$6. Vol. II, \$8.		
Fuertes's Water and Public Health.	12mo,	1 50
Furman's Manual of Practical Assaying.	8vo,	3 00
* Getman's Exercises in Physical Chemistry.	12mo,	2 00
Gill's Gas and Fuel Analysis for Engineers.	12mo,	1 25
* Gooch and Browning's Outlines of Qualitative Chemical Analysis.	Large 12mo,	1 25
Grotenfelt's Principles of Modern Dairy Practice. (Woll.)	12mo,	2 00
Groth's Introduction to Chemical Crystallography (Marshall)	12mo,	1 25
Hammarsten's Text-book of Physiological Chemistry. (Mandel.)	8vo,	4 00
Hanausek's Microscopy of Technical Products. (Winton.)	8vo,	5 00
* Haskins and Macleod's Organic Chemistry.	12mo,	2 00
Helm's Principles of Mathematical Chemistry. (Morgan.)	12mo,	1 50
Hering's Ready Reference Tables (Conversion Factors).	16mo, mor.	2 50
* Herrick's Denatured or Industrial Alcohol.	8vo,	4 00
Hinds's Inorganic Chemistry.	8vo,	3 00
* Laboratory Manual for Students	12mo,	1 00
* Holleman's Laboratory Manual of Organic Chemistry for Beginners. (Walker.)	12mo,	1 00
Text-book of Inorganic Chemistry. (Cooper.)	8vo,	2 50
Text-book of Organic Chemistry. (Walker and Mott.)	8vo,	2 50
Holley and Ladd's Analysis of Mixed Paints, Color Pigments, and Varnishes.	Large 12mo,	2 50

Hopkins's Oil-chemists' Handbook.....	8vo,	3 00
Iddings's Rock Minerals.....	8vo,	5 00
Jackson's Directions for Laboratory Work in Physiological Chemistry.....	8vo,	1 25
Johannsen's Determination of Rock-forming Minerals in Thin Sections.....	8vo,	4 00
Keep's Cast Iron.....	8vo,	2 50
Ladd's Manual of Quantitative Chemical Analysis.....	12mo,	1 00
Landauer's Spectrum Analysis. (Tingle.).....	8vo,	3 00
* Langworthy and Austen's Occurrence of Aluminium in Vegetable Products, Animal Products, and Natural Waters.....	8vo,	2 00
Lassar-Cohn's Application of Some General Reactions to Investigations in Organic Chemistry. (Tingle.).....	12mo,	1 00
Leach's Inspection and Analysis of Food with Special Reference to State Control.....	8vo,	7 50
Löb's Electrochemistry of Organic Compounds. (Lorenz.).....	8vo,	3 00
Lodge's Notes on Assaying and Metallurgical Laboratory Experiments.....	8vo,	3 00
Low's Technical Method of Ore Analysis.....	8vo,	3 00
Lunge's Techno-chemical Analysis. (Cohn.).....	12mo	1 00
* McKay and Larsen's Principles and Practice of Butter-making.....	8vo,	1 50
Maire's Modern Pigments and their Vehicles.....	12mo,	2 00
Mandel's Handbook for Bio-chemical Laboratory.....	12mo,	1 50
* Martin's Laboratory Guide to Qualitative Analysis with the Blowpipe.....	12mo,	60
Mason's Examination of Water. (Chemical and Bacteriological.).....	12mo,	1 25
Water-supply. (Considered Principally from a Sanitary Standpoint.).....	8vo,	4 00
Matthews's The Textile Fibres. 2d Edition, Rewritten.....	8vo,	4 00
Meyer's Determination of Radicles in Carbon Compounds. (Tingle.).....	12mo,	1 00
Miller's Cyanide Process.....	12mo,	1 00
Manual of Assaying.....	12mo,	1 00
Minet's Production of Aluminum and its Industrial Use. (Waldo.).....	12mo,	2 50
Mixer's Elementary Text-book of Chemistry.....	12mo,	1 50
Morgan's Elements of Physical Chemistry.....	12mo,	3 00
Outline of the Theory of Solutions and its Results.....	12mo,	1 00
* Physical Chemistry for Electrical Engineers.....	12mo,	1 50
Morse's Calculations used in Cane-sugar Factories.....	16mo, mor.	1 50
* Muir's History of Chemical Theories and Laws.....	8vo,	4 00
Mulliken's General Method for the Identification of Pure Organic Compounds. Vol. I.....	Large 8vo,	5 00
O'Driscoll's Notes on the Treatment of Gold Ores.....	8vo,	2 00
Ostwald's Conversations on Chemistry. Part One. (Ramsey.).....	12mo,	1 50
" " " " Part Two. (Turnbull.).....	12mo,	2 00
* Palmer's Practical Test Book of Chemistry.....	12mo,	1 00
* Pauli's Physical Chemistry in the Service of Medicine. (Fischer.).....	12mo,	1 25
* Penfield's Notes on Determinative Mineralogy and Record of Mineral Tests.....	8vo, paper,	50
Tables of Minerals, Including the Use of Minerals and Statistics of Domestic Production.....	8vo,	1 00
Pictet's Alkaloids and their Chemical Constitution. (Biddle.).....	8vo,	5 00
Poole's Calorific Power of Fuels.....	8vo,	3 00
Prescott and Winslow's Elements of Water Bacteriology, with Special Reference to Sanitary Water Analysis.....	12mo,	1 50
* Reisig's Guide to Piece-dyeing.....	8vo,	25 00
Richards and Woodman's Air, Water, and Food from a Sanitary Standpoint.....	8vo,	2 00
Ricketts and Miller's Notes on Assaying.....	8vo,	3 00
Rideal's Disinfection and the Preservation of Food.....	8vo,	4 00
Sewage and the Bacterial Purification of Sewage.....	8vo,	4 00
Riggs's Elementary Manual for the Chemical Laboratory.....	8vo,	1 25
Robine and Lenglen's Cyanide Industry. (Le Clerc.).....	8vo,	4 00
Ruddiman's Incompatibilities in Prescriptions.....	8vo,	2 00
Whys in Pharmacy.....	12mo,	1 00



Ruer's Elements of Metallography. (Mathewson). (In Preparation.)		
Sabin's Industrial and Artistic Technology of Paints and Varnish. ....	8vo,	3 00
Salkowski's Physiological and Pathological Chemistry. (Orndorff.)....	8vo,	2 50
Schimpf's Essentials of Volumetric Analysis. ....	12mo,	1 25
* Qualitative Chemical Analysis. ....	8vo,	1 25
Text-book of Volumetric Analysis. ....	12mo,	2 50
Smith's Lecture Notes on Chemistry for Dental Students. ....	8vo,	2 50
Spencer's Handbook for Cane Sugar Manufacturers. ....	16mo, mor.	3 00
Handbook for Chemists of Beet-sugar Houses. ....	16mo, mor.	3 00
Stockbridge's Rocks and Soils. ....	8vo,	2 50
* Tillman's Descriptive General Chemistry. ....	8vo,	3 00
* Elementary Lessons in Heat. ....	8vo,	1 50
Treadwell's Qualitative Analysis. (Hall.)....	8vo,	3 00
Quantitative Analysis. (Hall.)....	8vo,	4 00
Turnaure and Russell's Public Water-supplies. ....	8vo,	5 00
Van Deventer's Physical Chemistry for Beginners. (Boltwood.) ....	12mo,	1 50
Venable's Methods and Devices for Bacterial Treatment of Sewage. ....	8vo,	3 00
Ward and Whipple's Freshwater Biology. (In Press.)		
Ware's Beet-sugar Manufacture and Refining. Vol. I. ....	Small 8vo,	4 00
" " " " " Vol. II. ....	Small 8vo,	5 00
Washington's Manual of the Chemical Analysis of Rocks. ....	8vo,	2 00
* Weaver's Military Explosives. ....	8vo,	3 00
Wells's Laboratory Guide in Qualitative Chemical Analysis. ....	8vo,	1 50
Short Course in Inorganic Qualitative Chemical Analysis for Engineering Students. ....	12mo,	1 50
Text-book of Chemical Arithmetic. ....	12mo,	1 25
Whipple's Microscopy of Drinking-water. ....	8vo,	3 50
Wilson's Chlorination Process. ....	12mo	1 50
Cyanide Processes. ....	12mo	1 50
Winton's Microscopy of Vegetable Foods. ....	8vo	7 50

## CIVIL ENGINEERING.

### BRIDGES AND ROOFS. HYDRAULICS. MATERIALS OF ENGINEERING. RAILWAY ENGINEERING.

Baker's Engineers' Surveying Instruments. ....	12mo,	3 00
Bixby's Graphical Computing Table. ....	Paper 19½ × 24½ inches.	25
Breed and Hosmer's Principles and Practice of Surveying. ....	8vo,	3 00
* Burr's Ancient and Modern Engineering and the Isthmian Canal. ....	8vo,	3 50
Comstock's Field Astronomy for Engineers. ....	8vo,	2 50
* Corthell's Allowable Pressures on Deep Foundations. ....	12mo,	1 25
Crandall's Text-book on Geodesy and Least Squares. ....	8vo,	3 00
Davis's Elevation and Stadia Tables. ....	8vo,	1 00
Elliott's Engineering for Land Drainage. ....	12mo,	1 50
Practical Farm Drainage. ....	12mo,	1 00
* Fiebigger's Treatise on Civil Engineering. ....	8vo,	5 00
Flemer's Phototopographic Methods and Instruments. ....	8vo,	5 00
Folwell's Sewerage. (Designing and Maintenance.)....	8vo,	3 00
Freitag's Architectural Engineering. ....	8vo,	3 50
French and Ives's Stereotomy. ....	8vo,	2 50
Goodhue's Municipal Improvements. ....	12mo,	1 50
Gore's Elements of Geodesy. ....	8vo,	2 50
* Hauch and Rice's Tables of Quantities for Preliminary Estimates. ....	12mo,	1 25
Hayford's Text-book of Geodetic Astronomy. ....	8vo,	3 00
Hering's Ready Reference Tables (Conversion Factors). ....	16mo, mor.	2 50
Howe's Retaining Walls for Earth. ....	12mo,	1 25

* Ives's Adjustments of the Engineer's Transit and Level.....	16mo, Bds.	25
Ives and Hilt's Problems in Surveying.....	16mo, mor.	1 50
Johnson's (J. B.) Theory and Practice of Surveying.....	Small 8vo,	4 00
Johnson's (L. J.) Statics by Algebraic and Graphic Methods.....	8vo,	2 00
Kinnicutt, Winslow and Pratt's Purification of Sewage. (In Preparation).		
Laplace's Philosophical Essay on Probabilities. (Truscott and Emory.)	12mo,	2 00
Mahan's Descriptive Geometry.....	8vo,	1 50
Treatise on Civil Engineering. (1873.) (Wood.).....	8vo,	5 00
Merriman's Elements of Precise Surveying and Geodesy.....	8vo,	2 50
Merriman and Brooks's Handbook for Surveyors.....	16mo, mor.	2 00
Morrison's Elements of Highway Engineering. (In Press.)		
Nugent's Plane Surveying.....	8vo,	3 50
Ogden's Sewer Design.....	12mo,	2 00
Parsons's Disposal of Municipal Refuse.....	8vo,	2 00
Patton's Treatise on Civil Engineering.....	8vo, half leather,	7 50
Reed's Topographical Drawing and Sketching.....	4to,	5 00
Rideal's Sewage and the Bacterial Purification of Sewage.....	8vo,	4 00
Riemer's Shaft-sinking under Difficult Conditions. (Corning and Peele.)	8vo,	3 00
Siebert and Biggin's Modern Stone-cutting and Masonry.....	8vo,	1 50
Smith's Manual of Topographical Drawing. (McMillan.).....	8vo,	2 50
Soper's Air and Ventilation of Subways. (In Press.)		
Tracy's Plane Surveying.....	16mo, mor.	3 00
* Trautwine's Civil Engineer's Pocket-book.....	16mo, mor.	5 00
Venable's Garbage Crematories in America.....	8vo,	2 00
Methods and Devices for Bacterial Treatment of Sewage.....	8vo,	3 00
Wait's Engineering and Architectural Jurisprudence.....	8vo,	6 00
	Sheep,	6 50
Law of Contracts.....	8vo,	3 00
Law of Operations Preliminary to Construction in Engineering and Architecture.....	8vo,	5 00
	Sheep,	5 50
Warren's Stereotomy—Problems in Stone-cutting.....	8vo,	2 50
* Waterbury's Vest-Pocket Hand-book of Mathematics for Engineers.	2 $\frac{3}{4}$ ×5 $\frac{3}{4}$ inches, mor.	1 00
Webb's Problems in the Use and Adjustment of Engineering Instruments.....	16mo, mor.	1 25
Wilson's Topographic Surveying.....	8vo,	3 50

## BRIDGES AND ROOFS.

Boller's Practical Treatise on the Construction of Iron Highway Bridges.....	8vo,	2 00
Burr and Falk's Design and Construction of Metallic Bridges.....	8vo,	5 00
Influence Lines for Bridge and Roof Computations.....	8vo,	3 00
Du Bois's Mechanics of Engineering. Vol. II.....	Small 4to,	10 00
Foster's Treatise on Wooden Trestle Bridges.....	4to,	5 00
Fowler's Ordinary Foundations.....	8vo,	3 50
French and Ives's Stereotomy.....	8vo,	2 50
Greene's Arches in Wood, Iron, and Stone.....	8vo,	2 50
Bridge Trusses.....	8vo,	2 50
Roof Trusses.....	8vo,	1 25
Grimm's Secondary Stresses in Bridge Trusses.....	8vo,	2 50
Heller's Stresses in Structures and the Accompanyin' Deformations.....	8vo,	
Howe's Design of Simple Roof-trusses in Wood and Steel.....	8vo,	2 00
Symmetrical Masonry Arches.....	8vo,	2 50
Treatise on Arches.....	8vo,	4 00
Johnson, Bryan, and Turneure's Theory and Practice in the Designing of Modern Framed Structures.....	Small 4to,	10 00



Merriman and Jacoby's Text-book on Roofs and Bridges:

Part I. Stresses in Simple Trusses.....	8vo,	2 50
Part II. Graphic Statics.....	8vo,	2 50
Part III. Bridge Design.....	8vo,	2 50
Part IV. Higher Structures.....	8vo,	2 50
Morison's Memphis Bridge.....	Oblong 4to,	10 00
Sondericker's Graphic Statics, with Applications to Trusses, Beams, and Arches.....	8vo,	2 00
Waddell's De Pontibus, Pocket-book for Bridge Engineers.....	16mo, mor,	2 00
* Specifications for Steel Bridges.....	12mo,	50
Waddell and Harrington's Bridge Engineering. (In Preparation.)		
Wright's Designing of Draw-spans. Two parts in one volume.....	8vo,	3 50

## HYDRAULICS.

Barnes's Ice Formation.....	8vo,	3 00
Bazin's Experiments upon the Contraction of the Liquid Vein Issuing from an Orifice. (Trautwine.).....	8vo,	2 00
Bovey's Treatise on Hydraulics.....	8vo,	5 00
Church's Diagrams of Mean Velocity of Water in Open Channels.....	Oblong 4to, paper,	1 50
Hydraulic Motors.....	8vo,	2 00
Mechanics of Engineering.....	8vo,	6 00
Coffin's Graphical Solution of Hydraulic Problems.....	16mo, morocco,	2 50
Flatther's Dynamometers, and the Measurement of Power.....	12mo,	3 00
Folwell's Water-supply Engineering.....	8vo,	4 00
Frizell's Water-power.....	8vo,	5 00
Fuertes's Water and Public Health.....	12mo,	1 50
Water-filtration Works.....	12mo,	2 50
Ganguillet and Kutter's General Formula for the Uniform Flow of Water in Rivers and Other Channels. (Hering and Trautwine.).....	8vo,	4 00
Hazen's Clean Water and How to Get It.....	Large 12mo,	1 50
Filtration of Public Water-supplies.....	8vo,	3 00
Hazlehurst's Towers and Tanks for Water-works.....	8vo,	2 50
Herschel's 115 Experiments on the Carrying Capacity of Large, Riveted, Metal Conduits.....	8vo,	2 00
Hoyt and Grover's River Discharge.....	8vo,	2 00
Hubbard and Kiersted's Water-works Management and Maintenance.....	8vo,	4 00
* Lyndon's Development and Electrical Distribution of Water Power.....	8vo,	3 00
Mason's Water-supply. (Considered Principally from a Sanitary Standpoint.).....	8vo,	4 00
Merriman's Treatise on Hydraulics.....	8vo,	5 00
* Michie's Elements of Analytical Mechanics.....	8vo,	4 00
Molitor's Hydraulics of Rivers, Weirs and Sluices. (In Press.)		
Schuyler's Reservoirs for Irrigation, Water-power, and Domestic Water-supply.....	Large 8vo,	5 00
* Thomas and Watt's Improvement of Rivers.....	4to,	6 00
Turneaure and Russell's Public Water-supplies.....	8vo,	5 00
Wegmann's Design and Construction of Dams. 5th Ed., enlarged.....	4to,	6 00
Water-supply of the City of New York from 1658 to 1895.....	4to,	10 00
Whipple's Value of Pure Water.....	Large 12mo,	1 00
Williams and Hazen's Hydraulic Tables.....	8vo,	1 50
Wilson's Irrigation Engineering.....	Small 8vo,	4 00
Wolf's Windmill as a Prime Mover.....	8vo,	3 00
Wood's Elements of Analytical Mechanics.....	8vo,	3 00
Turbines.....	8vo,	2 50

## MATERIALS OF ENGINEERING.

Baker's Roads and Pavements. . . . .	8vo, 5 00
Treatise on Masonry Construction. . . . .	8vo, 5 00
Birkmire's Architectural Iron and Steel. . . . .	8vo, 3 50
Compound Riveted Girders as Applied in Buildings. . . . .	8vo, 2 00
Black's United States Public Works . . . . .	Oblong 4to, 5 00
Bleining's Manufacture of Hydraulic Cement. (In Preparation.)	
* Bovey's Strength of Materials and Theory of Structures. . . . .	8vo, 7 50
Burr's Elasticity and Resistance of the Materials of Engineering. . . . .	8vo, 7 50
Byrne's Highway Construction. . . . .	8vo, 5 00
Inspection of the Materials and Workmanship Employed in Construction.	16mo, 3 00
Church's Mechanics of Engineering. . . . .	8vo, 6 00
Du Bois's Mechanics of Engineering.	
Vol. I. Kinematics, Statics, Kinetics. . . . .	Small 4to, 7 50
Vol. II. The Stresses in Framed Structures, Strength of Materials and Theory of Flexures. . . . .	Small 4to, 10 00
* Eckel's Cements, Limes, and Plasters. . . . .	8vo, 6 00
Stone and Clay Products used in Engineering. (In Preparation.)	
Fowler's Ordinary Foundations. . . . .	8vo, 3 50
Graves's Forest Mensuration. . . . .	8vo, 4 00
Green's Principles of American Forestry . . . . .	12mo, 1 50
* Greene's Structural Mechanics. . . . .	8vo, 2 50
Holly and Ladd's Analysis of Mixed Paints, Color Pigments and Varnishes	
Large 12mo, 2 50	
Johnson's Materials of Construction. . . . .	Large 8vo, 6 00
Keep's Cast Iron. . . . .	8vo, 2 50
Kidder's Architects and Builders' Pocket-book. . . . .	16mo, 5 00
Lanza's Applied Mechanics. . . . .	8vo, 7 50
Maire's Modern Pigments and their Vehicles . . . . .	12mo, 2 00
Martens's Handbook on Testing Materials. (Henning.) 2 vols. . . . .	8vo, 7 50
Maurer's Technical Mechanics. . . . .	8vo, 4 00
Merrill's Stones for Building and Decoration. . . . .	8vo, 5 00
Merriman's Mechanics of Materials. . . . .	8vo, 5 00
* Strength of Materials . . . . .	12mo, 1 00
Metcalf's Steel. A Manual for Steel-users. . . . .	12mo, 2 00
Patton's Practical Treatise on Foundations. . . . .	8vo, 5 00
Rice's Concrete Block Manufacture. . . . .	8vo, 2 00
Richardson's Modern Asphalt Pavements. . . . .	8vo, 3 00
Richey's Handbook for Superintendents of Construction. . . . .	16mo, mor., 4 00
* Ries's Clays: Their Occurrence, Properties, and Uses. . . . .	8vo, 5 00
Sabin's Industrial and Artistic Technology of Paints and Varnish. . . . .	8vo, 3 00
* Schwarz's Longleaf Pine in Virgin Forest. . . . .	12mo, 1 25
Snow's Principal Species of Wood. . . . .	8vo, 3 50
Spalding's Hydraulic Cement. . . . .	12mo, 2 00
Text-book on Roads and Pavements. . . . .	12mo, 2 00
Taylor and Thompson's Treatise on Concrete, Plain and Reinforced. . . . .	8vo, 5 00
Thurston's Materials of Engineering. In Three Parts. . . . .	8vo, 8 00
Part I. Non-metallic Materials of Engineering and Metallurgy. . . . .	8vo, 2 00
Part II. Iron and Steel. . . . .	8vo, 3 50
Part III. A Treatise on Brasses, Bronzes, and Other Alloys and their Constituents. . . . .	8vo, 2 50
Tillson's Street Pavements and Paving Materials. . . . .	8vo, 4 00
Turneure and Maurer's Principles of Reinforced Concrete Construction. . . . .	8vo, 3 00
Wood's (De V.) Treatise on the Resistance of Materials, and an Appendix on the Preservation of Timber. . . . .	8vo, 2 00
Wood's (M. P.) Rustless Coatings: Corrosion and Electrolysis of Iron and Steel. . . . .	8vo, 4 00

## RAILWAY ENGINEERING.

Andrews's Handbook for Street Railway Engineers. ....	3x5 inches, mor.	1 25
Berg's Buildings and Structures of American Railroads. ....	4to,	5 00
Brooks's Handbook of Street Railroad Location. ....	16mo, mor.	1 50
Butt's Civil Engineer's Field-book. ....	16mo, mor.	2 50
Crandall's Railway and Other Earthwork Tables. ....	8vo,	1 50
Transition Curve. ....	16mo, mor.	1 50
* Crockett's Methods for Earthwork Computations. ....	8vo,	1 50
Dawson's "Engineering" and Electric Traction Pocket-book. ....	16mo, mor.	5 00
Dredge's History of the Pennsylvania Railroad: (1879). ....	Paper,	5 00
Fisher's Table of Cubic Yards. ....	Cardboard,	25
Godwin's Railroad Engineers' Field-book and Explorers' Guide. ....	16mo, mor.	2 50
Hudson's Tables for Calculating the Cubic Contents of Excavations and Embankments. ....	8vo,	1 00
Ives and Hilts's Problems in Surveying, Railroad Surveying and Geodesy. ....	16mo, mor.	1 50
Molitor and Beard's Manual for Resident Engineers. ....	16mo,	1 00
Nagle's Field Manual for Railroad Engineers. ....	16mo, mor.	3 00
Philbrick's Field Manual for Engineers. ....	16mo, mor.	3 00
Raymond's Railroad Engineering. 3 volumes.		
Vol. I. Railroad Field Geometry. (In Preparation.)		
Vol. II. Elements of Railroad Engineering. ....	8vo,	3 50
Vol III. Railroad Engineer's Field Book. (In Preparation.)		
Searles's Field Engineering. ....	16mo, mor.	3 00
Railroad Spiral. ....	16mo, mor.	1 50
Taylor's Prismoidal Formulæ and Earthwork. ....	8vo,	1 50
* Trautwine's Field Practice of Laying Out Circular Curves for Railroads. ....	12mo, mor.	2 50
* Method of Calculating the Cubic Contents of Excavations and Embankments by the Aid of Diagrams. ....	8vo,	2 00
Webb's Economics of Railroad Construction. ....	Large 12mo,	2 50
Railroad Construction. ....	16mo, mor.	5 00
Wellington's Economic Theory of the Location of Railways. ....	Small 8vo,	5 00

## DRAWING.

Barr's Kinematics of Machinery. ....	8vo,	2 50
* Bartlett's Mechanical Drawing. ....	8vo,	3 00
* " " " " Abridged Ed. ....	8vo,	1 50
Coolidge's Manual of Drawing. ....	8vo, paper,	1 00
Coolidge and Freeman's Elements of General Drafting for Mechanical Engineers. ....	Oblong 4to,	2 50
Durley's Kinematics of Machines. ....	8vo,	4 00
Emch's Introduction to Projective Geometry and its Applications. ....	8vo,	2 50
Hill's Text-book on Shades and Shadows, and Perspective. ....	8vo,	2 00
Jamison's Advanced Mechanical Drawing. ....	8vo,	2 00
Elements of Mechanical Drawing. ....	8vo,	2 50
Jones's Machine Design:		
Part I. Kinematics of Machinery. ....	8vo,	1 50
Part II. Form, Strength, and Proportions of Parts. ....	8vo,	3 00
MacCord's Elements of Descriptive Geometry. ....	8vo,	3 00
Kinematics; or, Practical Mechanism. ....	8vo,	5 00
Mechanical Drawing. ....	4to,	4 00
Velocity Diagrams. ....	8vo,	1 50
McLeod's Descriptive Geometry. ....	Large 12mo,	1 50
* Mahan's Descriptive Geometry and Stone-cutting. ....	8vo,	1 50
Industrial Drawing. (Thompson.) ....	8vo,	3 50



Moyer's Descriptive Geometry.....	8vo,	2 00
Reed's Topographical Drawing and Sketching.....	4to,	5 00
Reid's Course in Mechanical Drawing.....	8vo,	2 00
Text-book of Mechanical Drawing and Elementary Machine Design.....	8vo,	3 00
Robinson's Principles of Mechanism.....	8vo,	3 00
Schwamb and Merrill's Elements of Mechanism.....	8vo,	3 00
Smith's (R. S.) Manual of Topographical Drawing. (McMillan.).....	8vo,	2 50
Smith (A. W.) and Marx's Machine Design.....	8vo,	3 00
* Titsworth's Elements of Mechanical Drawing.....	Oblong 8vo,	1 25
Warren's Drafting Instruments and Operations.....	12mo,	1 25
Elements of Descriptive Geometry, Shadows, and Perspective.....	8vo,	3 50
Elements of Machine Construction and Drawing.....	8vo,	7 50
Elements of Plane and Solid Free-hand Geometrical Drawing.....	1. 2mo,	1 00
General Problems of Shades and Shadows.....	8vo,	3 00
Manual of Elementary Problems in the Linear Perspective of Form and Shadow.....	12mo,	1 00
Manual of Elementary Projection Drawing.....	12mo,	1 50
Plane Problems in Elementary Geometry.....	12mo,	1 25
Problems, Theorems, and Examples in Descriptive Geometry.....	8vo,	2 50
Weisbach's Kinematics and Power of Transmission. (Hermann and Klein.).....	8vo,	5 00
Wilson's (H. M.) Topographic Surveying.....	8vo,	3 50
Wilson's (V. T.) Free-hand Lettering.....	8vo,	1 00
Free-hand Perspective.....	8vo,	2 50
Woolf's Elementary Course in Descriptive Geometry.....	Large 8vo,	3 00

## ELECTRICITY AND PHYSICS.

* Abegg's Theory of Electrolytic Dissociation. (von Ende.).....	12mo,	1 25
Andrews's Hand-Book for Street Railway Engineering ....	3 × 5 inches, mor.,	1 25
Anthony and Brackett's Text-book of Physics. (Magie.).....	Large 12mo,	3 00
Anthony's Lecture-notes on the Theory of Electrical Measurements.....	12mo,	1 00
Benjamin's History of Electricity.....	8vo,	3 00
Voltaic Cell.....	8vo,	3 00
Betts's Lead Refining and Electrolysis.....	8vo,	4 00
Classen's Quantitative Chemical Analysis by Electrolysis. (Boltwood.).....	8vo,	3 00
* Collins's Manual of Wireless Telegraphy.....	12mo,	1 50
	Mor.	2 00
Crehore and Squier's Polarizing Photo-chronograph.....	8vo,	3 00
* Danneel's Electrochemistry. (Merriam.).....	12mo,	1 25
Dawson's "Engineering" and Electric Traction Pocket-book.....	16mo, mor	5 00
Dolezalek's Theory of the Lead Accumulator (Storage Battery). (von Ende.).....	12mo,	2 50
Duhem's Thermodynamics and Chemistry. (Burgess.).....	8vo,	4 00
Flather's Dynamometers, and the Measurement of Power.....	12mo,	3 00
Gilbert's De Magnete. (Mottelay.).....	8vo,	2 50
* Hanchett's Alternating Currents.....	12mo,	1 00
Hering's Ready Reference Tables (Conversion Factors).....	16mo, mor.	2 50
Hobart and Ellis's High-speed Dynamo Electric Machinery. (In Press.).....		
Holman's Precision of Measurements.....	8vo,	2 00
Telescopic Mirror-scale Method, Adjustments, and Tests.....	Large 8vo,	75
* Karapetoff's Experimental Electrical Engineering.....	8vo,	6 00
Kinzbrunner's Testing of Continuous-current Machines.....	8vo,	2 00
Landauer's Spectrum Analysis. (Tingle.).....	8vo,	3 00
Le Chatelier's High-temperature Measurements. (Boudouard—Burgess.).....	12mo,	3 00
Löb's Electrochemistry of Organic Compounds. (Lorenz.).....	8vo,	3 00
* Lyndon's Development and Electrical Distribution of Water Power.....	8vo,	3 00
* Lyons's Treatise on Electromagnetic Phenomena. Vols. I. and II. 8vo, each,		6 00
* Michie's Elements of Wave Motion Relating to Sound and Light.....	8vo,	4 00

Morgan's Outline of the Theory of Solution and its Results.....	12mo,	1 00
* Physical Chemistry for Electrical Engineers.....	12mo,	1 50
Niaudet's Elementary Treatise on Electric Batteries. (Fishback).....	12mo,	2 50
* Norris's Introduction to the Study of Electrical Engineering.....	8vo,	2 50
* Parshall and Hobart's Electric Machine Design.....	4to, half morocco,	12 50
Reagan's Locomotives: Simple, Compound, and Electric. New Edition.		
	Large 12mo,	3 50
* Rosenberg's Electrical Engineering. (Haldane Gee—Kinzbrunner.).....	8vo,	2 00
Ryan, Norris, and Hoxie's Electrical Machinery. Vol. I.....	8vo,	2 50
Schapper's Laboratory Guide for Students in Physical Chemistry.....	12mo,	1 00
Thurston's Stationary Steam-engines.....	8vo,	2 50
* Tillman's Elementary Lessons in Heat.....	8vo,	1 50
Tory and Pitcher's Manual of Laboratory Physics.....	Large 12mo,	2 00
Ulke's Modern Electrolytic Copper Refining.....	8vo,	3 00

## LAW.

* Davis's Elements of Law.....	8vo,	2 50
* Treatise on the Military Law of United States.....	8vo,	7 00
*	Sheep,	7 50
* Dudley's Military Law and the Procedure of Courts-martial....	Large 12mo,	2 50
Manual for Courts-martial.....	16mo, mor.	1 50
Wait's Engineering and Architectural Jurisprudence.....	8vo,	6 00
	Sheep,	6 50
Law of Contracts.....	8vo,	3 00
Law of Operations Preliminary to Construction in Engineering and Archi- tecture.....	8vo	5 00
	Sheep,	5 50

## MATHEMATICS.

Baker's Elliptic Functions.....	8vo,	1 50
Briggs's Elements of Plane Analytic Geometry. (Böcher).....	12mo,	1 00
* Buchanan's Plane and Spherical Trigonometry.....	8vo,	1 00
Byerley's Harmonic Functions.....	8vo,	1 00
Chandler's Elements of the Infinitesimal Calculus.....	12mo,	2 00
Compton's Manual of Logarithmic Computations.....	12mo,	1 50
Davis's Introduction to the Logic of Algebra.....	8vo,	1 50
* Dickson's College Algebra.....	Large 12mo,	1 50
* Introduction to the Theory of Algebraic Equations.....	Large 12mo,	1 25
Emch's Introduction to Projective Geometry and its Applications.....	8vo,	2 50
Fiske's Functions of a Complex Variable.....	8vo,	1 00
Halsted's Elementary Synthetic Geometry.....	8vo,	1 50
Elements of Geometry.....	8vo,	1 75
* Rational Geometry.....	12mo,	1 50
Hyde's Grassmann's Space Analysis.....	8vo,	1 00
* Jonnson's (J B.) Three-place Logarithmic Tables: Vest-pocket size, paper,		15
	100 copies,	5 00
*	Mounted on heavy cardboard, 8×10 inches,	25
	10 copies,	2 00
Johnson's (W. W.) Abridged Editions of Differential and Integral Calculus		
	Large 12mo, 1 vol.	2 50
Curve Tracing in Cartesian Co-ordinates.....	12mo,	1 00
Differential Equations.....	8vo,	1 00
Elementary Treatise on Differential Calculus. (In Press.)		
Elementary Treatise on the Integral Calculus.....	Large 12mo,	1 50
* Theoretical Mechanics.....	12mo,	3 00
Theory of Errors and the Method of Least Squares.....	12mo,	1 50
Treatise on Differential Calculus.....	Large 12mo,	3 00
Treatise on the Integral Calculus.....	Large 12mo,	3 00
Treatise on Ordinary and Partial Differential Equations.....	Large 12mo,	3 50



Laplace's Philosophical Essay on Probabilities. (Truscott and Emory.)	12mo,	2 00
* Ludlow and Bass's Elements of Trigonometry and Logarithmic and Other Tables	8vo,	3 00
Trigonometry and Tables published separately	Each,	2 00
* Ludlow's Logarithmic and Trigonometric Tables	8vo,	1 00
Macfarlane's Vector Analysis and Quaternions	8vo,	1 00
McMahon's Hyperbolic Functions	8vo,	1 00
Manning's Irrational Numbers and their Representation by Sequences and Series	12mo,	1 25
Mathematical Monographs. Edited by Mansfield Merriman and Robert S. Woodward.	Octavo, each	1 00
No. 1. History of Modern Mathematics, by David Eugene Smith.		
No. 2. Synthetic Projective Geometry, by George Bruce Halsted.		
No. 3. Determinants, by Laenas Gifford Weld. No. 4. Hyperbolic Functions, by James McMahon. No. 5. Harmonic Functions, by William E. Byerly. No. 6. Grassmann's Space Analysis, by Edward W. Hyde. No. 7. Probability and Theory of Errors, by Robert S. Woodward. No. 8. Vector Analysis and Quaternions, by Alexander Macfarlane. No. 9. Differential Equations, by William Woolsey Johnson. No. 10. The Solution of Equations, by Mansfield Merriman. No. 11. Functions of a Complex Variable, by Thomas S. Fiske.		
Maurer's Technical Mechanics	8vo,	4 00
Merriman's Method of Least Squares	8vo,	2 00
Solution of Equations	8vo,	1 00
Rice and Johnson's Differential and Integral Calculus. 2 vols. in one.		
Large	12mo,	1 50
Elementary Treatise on the Differential Calculus	Large 12mo,	3 00
Smith's History of Modern Mathematics	8vo,	1 00
* Veblen and Lennes's Introduction to the Real Infinitesimal Analysis of One Variable	8vo,	2 00
* Waterbury's Vest Pocket Hand-Book of Mathematics for Engineers.	2 $\frac{3}{4}$ X 5 $\frac{1}{2}$ inches, mor.,	1 00
Weld's Determinations	8vo,	1 00
Wood's Elements of Co-ordinate Geometry	8vo,	2 00
Woodward's Probability and Theory of Errors	8vo,	1 00

## MECHANICAL ENGINEERING.

### MATERIALS OF ENGINEERING, STEAM-ENGINES AND BOILERS.

Bacon's Forge Practice	12mo,	1 50
Baldwin's Steam Heating for Buildings	12mo,	2 50
Barr's Kinematics of Machinery	8vo,	2 50
* Bartlett's Mechanical Drawing	8vo,	3 00
" " " " Abridged Ed.	8vo,	1 50
Benjamin's Wrinkles and Recipes	12mo,	2 00
* Burr's Ancient and Modern Engineering and the Isthmian Canal	8vo,	3 50
Carpenter's Experimental Engineering	8vo,	6 00
Heating and Ventilating Buildings	8vo,	4 00
Clerk's Gas and Oil Engine	Large 12mo,	4 00
Compton's First Lessons in Metal Working	12mo,	1 50
Compton and De Groodt's Speed Lathe	12mo,	1 50
Coolidge's Manual of Drawing	8vo, paper,	1 00
Coolidge and Freeman's Elements of General Drafting for Mechanical Engineers	Oblong 4to,	2 50
Cromwell's Treatise on Belts and Pulleys	12mo,	1 50
Treatise on Toothed Gearing	12mo,	1 50
Durley's Kinematics of Machines	8vo,	4 00

Flather's Dynamometers and the Measurement of Power. . . . .	12mo,	3 00
Rope Driving. . . . .	12mo,	2 00
Gill's Gas and Fuel Analysis for Engineers. . . . .	12mo,	1 25
Goss's Locomotive Sparks. . . . .	8vo,	2 00
Hall's Car Lubrication. . . . .	12mo,	1 00
Hering's Ready Reference Tables (Conversion Factors). . . . .	16mo, mor.,	2 50
Hobart and Ellis's High Speed Dynamo Electric Machinery. (In Press.)		
Hutton's Gas Engine. . . . .	8vo,	5 00
Jamison's Advanced Mechanical Drawing. . . . .	8vo,	2 00
Elements of Mechanical Drawing. . . . .	8vo,	2 50
Jones's Machine Design:		
Part I. Kinematics of Machinery. . . . .	8vo,	1 50
Part II. Form, Strength, and Proportions of Parts. . . . .	8vo,	3 00
Kent's Mechanical Engineers' Pocket-book. . . . .	16mo, mor,	5 00
Kerr's Power and Power Transmission. . . . .	8vo,	2 00
Leonard's Machine Shop Tools and Methods. . . . .	8vo,	4 00
* Lorenz's Modern Refrigerating Machinery. (Pope, Haven, and Dean.)	8vo,	4 00
MacCord's Kinematics; or, Practical Mechanism. . . . .	8vo,	5 00
Mechanical Drawing. . . . .	4to,	4 00
Velocity Diagrams. . . . .	8vo,	1 50
MacFarland's Standard Reduction Factors for Gases. . . . .	8vo,	1 50
Mahan's Industrial Drawing. •(Thompson.)	8vo,	3 50
* Parshall and Hobart's Electric Machine Design. . . . .	Small 4to, half leather,	12 50
Peele's Compressed Air Plant for Mines. (In Press.)		
Poole's Calorific Power of Fuels. . . . .	8vo,	3 00
* Porter's Engineering Reminiscences, 1855 to 1882. . . . .	8vo,	3 00
Reid's Course in Mechanical Drawing. . . . .	8vo,	2 00
Text-book of Mechanical Drawing and Elementary Machine Design.	8vo,	3 00
Richard's Compressed Air. . . . .	12mo,	1 50
Robinson's Principles of Mechanism. . . . .	8vo,	3 00
Schwamb and Merrill's Elements of Mechanism. . . . .	8vo,	3 00
Smith's (O.) Press-working of Metals. . . . .	8vo,	3 00
Smith (A. W.) and Marx's Machine Design. . . . .	8vo,	3 00
Thurston's Animal as a Machine and Prime Motor, and the Laws of Energetics.		
	12mo,	1 00
Treatise on Friction and Lost Work in Machinery and Mill Work. . . . .	8vo,	3 00
Tillson's Complete Automobile Instructor . . . . .	16mo,	1 50
	mor.,	2 00
* Titsworth's Elements of Mechanical Drawing. . . . .	Oblong 8vo,	1 25
Warren's Elements of Machine Construction and Drawing. . . . .	8vo,	7 50
* Waterbury's Vest Pocket Hand Book of Mathematics for Engineers.		
	2 $\frac{1}{8}$ × 5 $\frac{3}{8}$ inches, mor.,	1 00
Weisbach's Kinematics and the Power of Transmission. (Herrmann—Klein.)	8vo,	5 00
Machinery of Transmission and Governors. (Herrmann—Klein.)	8vo,	5 00
Wolff's Windmill as a Prime Mover. . . . .	8vo,	3 00
Wood's Turbines. . . . .	8vo,	2 50

## MATERIALS OF ENGINEERING.

* Bovey's Strength of Materials and Theory of Structures. . . . .	8vo,	7 50
Burr's Elasticity and Resistance of the Materials of Engineering. . . . .	8vo,	7 50
Church's Mechanics of Engineering. . . . .	8vo,	6 00
* Greene's Structural Mechanics. . . . .	8vo,	2 50
Holley and Ladd's Analysis of Mixed Paints, Color Pigments, and Varnishes.		
	Large 12mo,	2 50
Johnson's Materials of Construction. . . . .	8vo,	6 00
Keep's Cast Iron. . . . .	8vo,	2 50
Lanza's Applied Mechanics. . . . .	8vo,	7 50

Maire's Modern Pigments and their Vehicles. ....	12mo,	2 00
Martens's Handbook on Testing Materials. (Henning.) .....	8vo,	7 50
Maurer's Technical Mechanics. ....	8vo,	4 00
Merriman's Mechanics of Materials. ....	8vo,	5 00
* Strength of Materials. ....	12mo,	1 00
Metcalf's Steel. A Manual for Steel-users. . .	12mo,	2 00
Sabin's Industrial and Artistic Technology of Paints and Varnish. ....	8vo,	3 00
Smith's Materials of Machines. ....	12mo,	1 00
Thurston's Materials of Engineering. ....	3 vols., 8vo,	8 00
Part I. Non-metallic Materials of Engineering, see Civil Engineering, page 9.		
Part II. Iron and Steel. ....	8vo,	3 50
Part III. A Treatise on Brasses, Bronzes, and Other Alloys and their Constituents. ....	8vo,	2 50
Wood's (De V.) Elements of Analytical Mechanics. ....	8vo,	3 00
Treatise on the Resistance of Materials and an Appendix on the Preservation of Timber. ....	8vo,	2 00
Wood's (M. P.) Rustless Coatings: Corrosion and Electrolysis of Iron and Steel. ....	8vo,	4 00

### STEAM-ENGINES AND BOILERS.

Berry's Temperature-entropy Diagram. ....	12mo,	1 25
Carnot's Reflections on the Motive Power of Heat. (Thurston.) . . .	12mo,	1 50
Chase's Art of Pattern Making. ....	12mo,	2 50
Creighton's Steam-engine and other Heat-motors. ....	8vo,	5 00
Dawson's "Engineering" and Electric Traction Pocket-book. . .	16mo, mor.,	5 00
Ford's Boiler Making for Boiler Makers. ....	18mo,	1 00
Goss's Locomotive Performance. ....	8vo,	5 00
Hemenway's Indicator Practice and Steam-engine Economy. ....	12mo,	2 00
Hutton's Heat and Heat-engines. ....	8vo,	5 00
Mechanical Engineering of Power Plants. ....	8vo,	5 00
Kent's Steam boiler Economy. ....	8vo,	4 00
Kneass's Practice and Theory of the Injector. ....	8vo,	1 50
MacCord's Slide-valves. ....	8vo,	2 00
Meyer's Modern Locomotive Construction. ....	4to,	10 00
Moyer's Steam Turbines. (In Press.)		
Peabody's Manual of the Steam-engine Indicator. ....	12mo,	1 50
Tables of the Properties of Saturated Steam and Other Vapors. ....	8vo,	1 00
Thermodynamics of the Steam-engine and Other Heat-engines. ....	8vo,	5 00
Valve-gears for Steam-engines. ....	8vo,	2 50
Peabody and Miller's Steam-boilers. ....	8vo,	4 00
Pray's Twenty Years with the Indicator. ....	Large 8vo,	2 50
Pupin's Thermodynamics of Reversible Cycles in Gases and Saturated Vapors. (Osterberg.) . . .	12mo,	1 25
Reagan's Locomotives: Simple, Compound, and Electric. New Edition. Large	12mo,	3 50
Sinclair's Locomotive Engine Running and Management. ....	12mo,	2 00
Smart's Handbook of Engineering Laboratory Practice. ....	12mo,	2 50
Snow's Steam-boiler Practice. ....	8vo,	3 00
Spangler's Notes on Thermodynamics. ....	12mo,	1 00
Valve-gears. ....	8vo,	2 50
Spangler, Greene, and Marshall's Elements of Steam-engineering. ....	8vo,	3 00
Thomas's Steam-turbines. ....	8vo,	4 00
Thurston's Handbook of Engine and Boiler Trials, and the Use of the Indi- cator and the Prony Brake. ....	8vo,	5 00
Handy Tables. ....	8vo,	1 50
Manual of Steam-boilers, their Designs, Construction, and Operation. .	8vo,	5 00



* Iddings's Rock Minerals.....	8vo,	5 00
Johannsen's Determination of Rock-forming Minerals in Thin Sections.....	8vo,	4 00
* Martin's Laboratory Guide to Qualitative Analysis with the Blowpipe.....	12mo,	60
Merrill's Non-metallic Minerals: Their Occurrence and Uses.....	8vo,	4 00
Stones for Building and Decoration.....	8vo,	5 00
* Penfield's Notes on Determinative Mineralogy and Record of Mineral Tests.....	8vo, paper,	50
Tables of Minerals, Including the Use of Minerals and Statistics of Domestic Production.....	8vo,	1 00
Pirsson's Rocks and Rock Minerals. (In Press.)		
* Richards's Synopsis of Mineral Characters.....	12mo, mor.	1 25
* Ries's Clays: Their Occurrence, Properties, and Uses.....	8vo,	5 00
* Tillman's Text-book of Important Minerals and Rocks.....	8vo,	2 00

## MINING.

* Beard's Mine Gases and Explosions.....	Large 12mo,	3 00
Boyd's Map of Southwest Virginia.....	Pocket-book form,	2 00
Resources of Southwest Virginia.....	8vo,	3 00
Crane's Gold and Silver. (In Press.)		
Douglas's Untechnical Addresses on Technical Subjects.....	12mo,	1 00
Eissler's Modern High Explosives.....	8vo,	4 00
Goessel's Minerals and Metals: A Reference Book.....	16mo, mor.	3 00
Il Iseng's Manual of Mining.....	8vo,	5 00
* Iles's Lead-smelting.....	12mo,	2 50
Miller's Cyanide Process.....	12mo,	1 00
O'Driscoll's Notes on the Treatment of Gold Ores.....	8vo,	2 00
Peele's Compressed Air Plant for Mines. (In Press.)		
Riemer's Shaft Sinking Under Difficult Conditions. (Corning and Peele).....	8vo,	3 00
Robine and Lenglen's Cyanide Industry. (Le Clerc.).....	8vo,	4 00
* Weaver's Military Explosives.....	8vo,	3 00
Wilson's Chlorination Process.....	12mo,	1 50
Cyanide Processes.....	12mo,	1 50
Hydraulic and Placer Mining. 2d edition, rewritten.....	12mo,	2 50
Treatise on Practical and Theoretical Mine Ventilation.....	12mo,	1 25

## SANITARY SCIENCE.

Association of State and National Food and Dairy Departments, Hartford Meeting, 1906.....	8vo,	3 00
Jamestown Meeting, 1907.....	8vo,	3 00
* Bashore's Outlines of Practical Sanitation.....	12mo,	1 25
Sanitation of a Country House.....	12mo,	1 00
Sanitation of Recreation Camps and Parks.....	12mo,	1 00
Folwell's Sewerage. (Designing, Construction, and Maintenance.).....	8vo,	3 00
Water-supply Engineering.....	8vo,	4 00
Fowler's Sewage Works Analyses.....	12mo,	2 00
Fuertes's Water-filtration Works.....	12mo,	2 50
Water and Public Health.....	12mo,	1 50
Gerhard's Guide to Sanitary House-inspection.....	16mo,	1 00
* Modern Baths and Bath Houses.....	8vo,	3 00
Sanitation of Public Buildings.....	12mo,	1 50
Hazen's Clean Water and How to Get It.....	Large 12mo,	1 50
Filtration of Public Water-supplies.....	8vo,	3 00
Kinnicut, Winslow and Pratt's Purification of Sewage. (In Press.)		
Leach's Inspection and Analysis of Food with Special Reference to State Control.....	8vo,	7 00
Mason's Examination of Water. (Chemical and Bacteriological).....	12mo,	1 25
Water-supply. (Considered principally from a Sanitary Standpoint).....	8vo,	4 00



* Merriman's Elements of Sanitary Engineering.....	8vo,	2 00
Ogden's Sewer Design.....	12mo,	2 00
Parsons's Disposal of Municipal Refuse.....	8vo,	2 00
Prescott and Winslow's Elements of Water Bacteriology, with Special Reference to Sanitary Water Analysis.....	12mo,	1 50
* Price's Handbook on Sanitation.....	12mo,	1 50
Richards's Cost of Food. A Study in Diets.....	12mo,	1 00
Cost of Living as Modified by Sanitary Science.....	12mo,	1 00
Cost of Shelter.....	12mo,	1 00
* Richards and Williams's Dietary Computer.....	8vo,	1 50
Richards and Woodman's Air, Water, and Food from a Sanitary Standpoint.....	8vo,	2 00
Rideal's Disinfection and the Preservation of Food.....	8vo,	4 00
Sewage and Bacterial Purification of Sewage.....	8vo,	4 00
Soper's Air and Ventilation of Subways. (In Press.).....		
Turneure and Russell's Public Water-supplies.....	8vo,	5 00
Venable's Garbage Crematories in America.....	8vo,	2 00
Method and Devices for Bacterial Treatment of Sewage.....	8vo,	3 00
Ward and Whipple's Freshwater Biology. (In Press.).....		
Whipple's Microscopy of Drinking-water.....	8vo,	3 50
* Typhoid Fever.....	Large 12mo,	3 00
Value of Pure Water.....	Large 12mo,	1 00
Winton's Microscopy of Vegetable Foods.....	8vo,	7 50

#### MISCELLANEOUS.

Emmons's Geological Guide-book of the Rocky Mountain Excursion of the International Congress of Geologists.....	Large 8vo,	1 50
Ferrel's Popular Treatise on the Winds.....	8vo,	4 00
Fitzgerald's Boston Machinist.....	18mo,	1 00
Gannett's Statistical Abstract of the World.....	24mo,	75
Haines's American Railway Management.....	12mo,	2 50
* Hanusek's The Microscopy of Technical Products. (Winton).....	8vo,	5 00
Ricketts's History of Rensselaer Polytechnic Institute 1824-1894.....	Large 12mo,	3 00
Rotherham's Emphasized New Testament.....	Large 8vo,	2 00
Standage's Decoration of Wood, Glass, Metal, etc.....	12mo,	2 00
Thome's Structural and Physiological Botany. (Bennett).....	16mo,	2 25
Westermaier's Compendium of General Botany. (Schneider).....	8vo,	2 00
Winslow's Elements of Applied Microscopy.....	12mo,	1 50

#### HEBREW AND CHALDEE TEXT-BOOKS.

Green's Elementary Hebrew Grammar.....	12mo,	1 25
Gesenius's Hebrew and Chaldee Lexicon to the Old Testament Scriptures. (Tregelles).....	Small 4to, half morocco,	5 00





